



타이밍 플리 (성형)

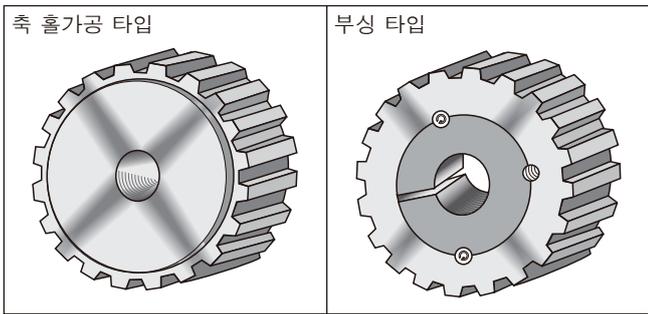

[표준사이즈]

- 축 홀가공 타입

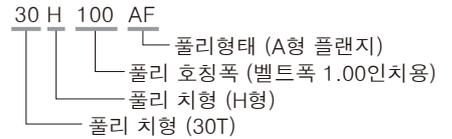

[특징]

OA기기, 자동화 기기의 경량화, 저 코스트화의 요구에 맞춰 최적의 재질과 양산 타입의 성형방법을 채용 (다음의 3종이 있음)


- 타이밍 플리S (소결금속)
- 타이밍 플리D (알루미늄, 아연 다이캐스팅)
- 타이밍 플리MT (수지 인젝션)

[용도]


경량화, 가격절감이 가능한 OA기기, 자동화 기기 등

[표준형태]

- 축 홀가공 타입

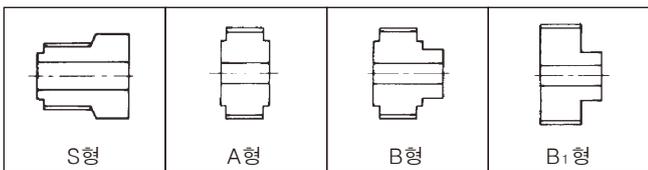

- 축 홀가공 타입

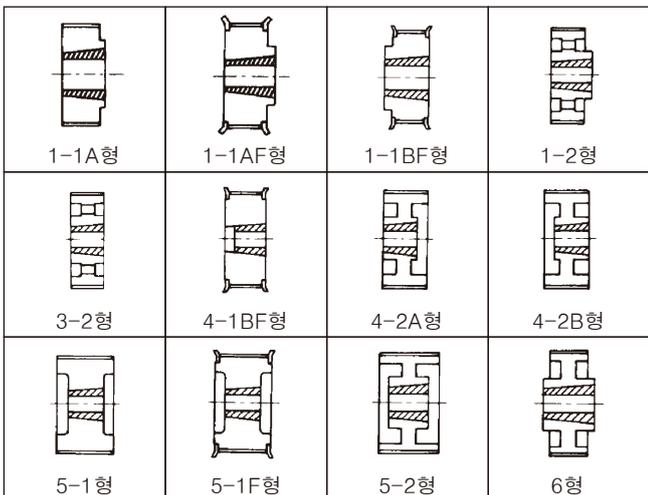

플리 치형	재고유무	플리 호칭폭	플리 형태	플리잇수
MXL	표준재고	6.4	SF	12, 14, 15, 16, 18, 20, 22
			BF	24, 25, 26, 28, 30, 32, 34, 36, 40, 42, 44, 48, 50, 52, 56, 60, 64, 68, 72, 76, 80, 88, 96, 100
	수주생산	9.5	SF	16, 18, 20, 22
			BF	24, 25, 26, 28, 30, 32, 34, 36, 40, 42, 44, 48, 50, 52, 56, 60, 64, 68, 72, 76, 80, 88, 96, 100
XL	표준재고	037	A	10, 11, 12, 13, 14, 15
			A, B	16, 18, 19, 20, 21, 22, 24, 25, 26, 27, 28, 30, 32, 34, 36, 38, 40, 42, 44, 48, 50, 60, 72
	수주생산	050	A	10, 11, 12, 13, 14, 15
			A, B	16, 18, 19, 20, 21, 22, 24, 25, 26, 27, 28, 30, 32, 34, 36, 38, 40, 42, 44, 48, 50, 60, 72
	표준재고	037S	SF	10, 11, 12, 13, 14, 15
			BF	16, 18, 19, 20, 21, 22, 24, 25, 26, 27, 28, 30
L	표준재고	050, 075, 100	A, B	12, 14, 15, 16, 18, 19, 20, 21, 22, 23, 24, 25, 26, 28, 30, 32, 34, 36, 40, 42, 44, 48, 50
			A, B	14, 15, 16, 18, 19, 20, 21, 22, 23, 24, 25, 26, 28, 30, 32, 34, 36, 40, 42, 44, 48, 50
			A, B	10, 12, 14, 15, 16, 18, 19, 20, 21, 22, 23, 24, 25, 26, 28, 30, 32, 34, 36, 40, 42, 44, 48, 50
	수주생산	050, 075, 100	B1	60, 72, 84
H	표준재고	100, 150, 200, 300	A, B	14, 15, 16, 18, 19, 20, 21, 22, 24, 25, 26, 28, 30, 32, 34, 36
			A, B	14, 15, 16, 18, 19, 20, 21, 22, 24, 25, 26, 28, 30, 32, 34, 36
			A, B	14, 15, 16, 18, 19, 20, 21, 22, 24, 25, 26, 28, 30, 32, 34, 36, 38
			A, B	16, 18, 19, 20, 21, 22, 24, 25, 26, 28, 30, 32, 34, 36
	수주생산	100, 150, 200, 300	B1	40, 42, 44, 48, 50, 60, 72, 84, 96
			B1	40, 42, 44, 46, 48, 50, 60, 72, 84, 96
			B1	40, 42, 44, 48, 50, 60, 72, 84, 96
XH	수주생산	200, 300, 400	A	18, 20, 22, 24, 26, 28, 30
			D	32, 36, 40, 44, 48
			E	60, 72, 84, 96, 120
XXH	수주생산	200, 300, 400, 500	A	18, 20, 22, 24, 26
			D	28, 32, 34, 36, 40, 44
			E	48, 60
T5	수주생산	10, 15	A	12, 14, 15
			B	16, 18, 20, 22, 24, 25, 26, 28, 30, 32, 36, 40, 44, 48, 50, 60, 72
T10	수주생산	15, 25	A, B	12, 14, 15, 16, 18, 20, 22, 24, 25, 26, 28, 30, 32, 36, 40
			D	44, 48, 50, 60, 72


*SF, AF, BF는 플랜지가 있으나 플리 본체에 붙어 있지는 않습니다.

타이밍 폴리 (성형)

[표준사이즈]

● 부상타입

표시 예

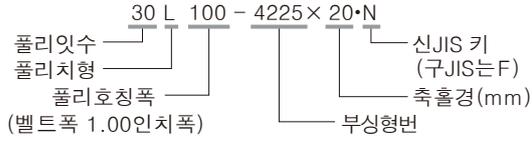

폴리 치형	재고유무	폴리 호칭폭	폴리 형태	폴리잇수		
L	표준재고	050	1-1BF	19, 20, 21, 22, 23, 24, 25, 26, 28, 30, 32, 34, 36		
		075	4-1BF	19, 20, 21, 22, 23, 24, 25, 26, 28, 30, 32, 34, 36		
		100	4-1BF	19, 20, 21, 22, 23, 24, 25, 26, 28, 30, 32		
			1-1BF	34, 36		
	수주생산	050	1-1AF	40, 42, 44, 48, 50		
			1-2	60, 72		
			6	84		
		075	4-1BF	40		
			1-1AF	42, 44, 48, 50		
		100	1-2	60, 72, 84		
			1-1BF	40, 42, 44, 48, 50		
			1-2	60, 72, 84		
H	표준재고	100	4-1BF	18, 19, 20, 21, 22, 24, 25, 26, 28		
		150	4-1BF	20, 21, 22, 24, 25, 26, 28		
		200	4-1BF	24, 25, 26, 28		
	수주생산	100	1-1BF	30, 32, 34, 36		
			1-1A	40, 42		
			1-2	44, 48, 50, 60, 72, 84, 96		
		150	4-1BF	30, 32, 34, 36		
			4-2B	40, 42, 44, 48		
			3-2	50, 60, 72, 84, 96		
		200	4-1BF	30		
			5-1F	32, 34, 36		
			5-1	40, 42, 44, 48		
			5-2	50, 60, 72, 84		
			4-2A	96		
		300	5-1	40, 42, 44, 48, 50		
			5-2	60, 72		
		XH	수주생산	200, 300, 400	5-1F	22, 24, 26, 28, 30
					5-2	32, 34, 36, 40, 42, 44, 48, 60, 72
				200	1-2	84
					6	96, 120
5-1	32, 34, 36					
300	5-2			40, 42, 44, 48, 60, 72		
	4-2A			84, 96, 120		
	5-1			32, 34, 36		
400	5-2			40, 42, 44, 48, 60, 72, 84, 96, 120		