



BANDO

BANDO LIGHT-DUTY CONVEYOR BELT

 **SUNLINE™ BELTS**

 **BANCOLLAN™ LONG SYNCHRONOUS BELTS**

 **PS BELTS™**

 **BANCORD™ ROUND BELTS**

C-SL-003-100E

— ISO Certification and Food Sanitation Act standards —

Bando's Kakogawa Factory, which manufactures SUNLINE Belts, acquired ISO9001 and 14001 Certification to conduct organized and systematic quality assurance and environmental conservation.

We also integrated the ISO9001 and ISO14001 instruction manuals for system efficiency.

The SUNLINE Belts we supply to the food industry, including those made of PVC, meet Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare.







We have polyurethane belts which pass flame resistant standard ISO340. For details, please contact Bando or your distributor.



Quality Management System
Industrial Products Division
ISO 9001
Certification acquired on May 2, 1996
ID No. YKA0953248



Environment Management System
Kakogawa Factory
ISO 14001
Certification acquired on May 21, 1999
ID No. YKA0772509

	Bando Light-Duty Conveyor Belts Features and Major Applications	3
	SUNLINE Belts	4
	Belt Selection	
	Usage Examples/How to Order/Selection/Selection Chart/Number of Plies	5
	Food	
	F Series Belts for Food Conveyance Applications <i>F series</i>	17
	Logistics / General Purpose	
	Logistics (Material Distribution)/General Purpose Conveyance Belt Products <i>M series</i>	21
	Special Purpose	
	Special Purpose Conveyance Belt Products <i>S series</i>	24
	Super SUNLINE Belts	
	"Super SUNLINE" Seamless Belt Products <i>P series</i>	29
	Inclined Conveyance	
	Inclined Conveyance Belt Products	31
	Design Materials / Special Processes	
	Joins/Belt Tension Adjustment/Standard Width/Dimensional Tolerance/ Cleats/Custom Fabrication/Oil/Chemical Resistance/Notes for Storage and Use	33
	Bancollan Long Synchronous Belts	42
	PS Belts	50
	Bancord Round Belts	56
	Glossary	61

BANDO LIGHT-DUTY CONVEYOR BELT

Products

Usage Examples

SUNLINE Belts

- Wide selection available
- High performance "F Series" for food conveyance
- "M Series" for logistics (material distribution) / general purpose conveyance
- Multi-use "S Series"
- Cleats and guides can be fabricated upon request

Super SUNLINE Belts

- Seamless, precision conveyance
- Long life even in small pulley or knife edge conveyance
- Wide selection, including non-fray

- ▶ Food
- ▶ Baggage, boxes
- ▶ Components, bulk
- ▶ Lumber, plywood
- ▶ Fibers
- ▶ Paper
- ▶ Gaming machines
- ▶ Medical equipment

- ▶ Scales
- ▶ Metal detectors
- ▶ Small pulley and knife edge conveyors

Bancollan Long Synchronous Belts

- Synchronous conveyance and positioning applications
- Wide selection of tooth profiles
- Profile processing possibilities
- Meets Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare

Bancollan Long Flat Belts

- Excellent dimensional stability and precision thickness

- ▶ Food
- ▶ Panels
- ▶ Reciprocal motion, such as for sliding doors
- ▶ Head motion and positioning for printers, plotters
- ▶ Medical supplies, test tubes

- ▶ Transport equipment risers

PS Belts


- Transmission belts for light-load, high-speed applications
- Proven performance in light duty applications
- Axes adjust according to belt elongation (no need for take-up)
- Seamless and precise conveyance

- ▶ Cards, banknotes
- ▶ Test tubes
- ▶ Chip registers
- ▶ High-speed, light-load transmission
- ▶ Paper
- ▶ Scales
- ▶ Food
- ▶ Medical equipment

Bancord Round Belts

- Easily joined to desired length
- Light load and multi-belt conveyance
- Meets Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare

- ▶ Roller conveyor drives
- ▶ Food
- ▶ Cards, banknotes
- ▶ Circuit boards
- ▶ Light load power transmission

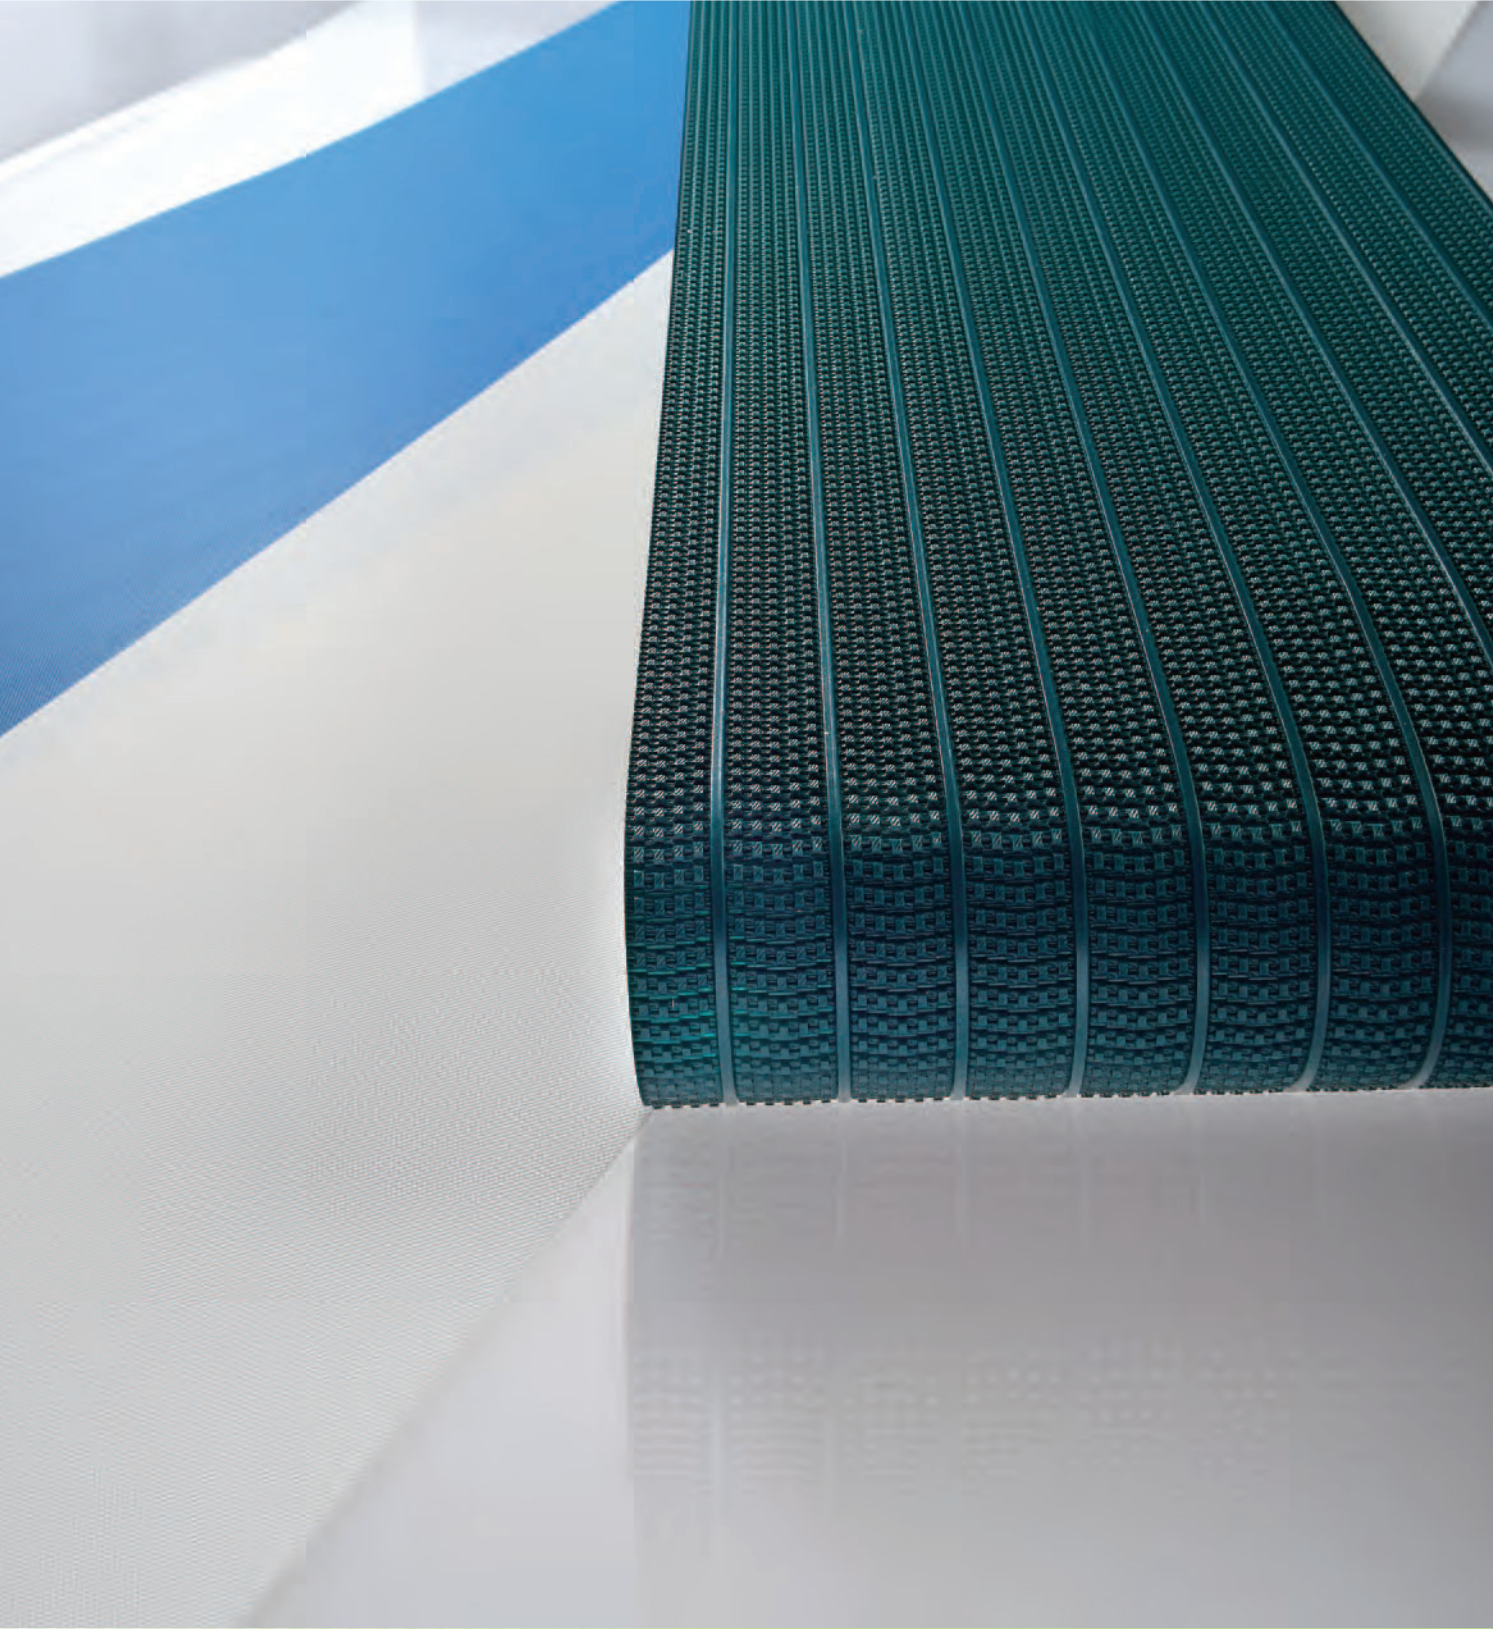

Features and
Major Applications

SUNLINE Belts

Belt
Selection

Food

Logistics/
General Purpose

Special
Purpose

Super
SUNLINE Belts

Inclined
Conveyance

Design Materials/
Special Processes

Bancollan Long
Synchronous Belts

PS Belts

Bancord
Round Belts


Glossary

SUNLINE™ BELTS


Usage Examples

Food, Food Machinery


Bando's F-Series resin conveyor belts have been a pioneer in the food industry. Antibacterial, antifungal and non-fray features are standard specifications. A wide selection is available as we have made product improvements and size reductions to reduce environmental impact and respond to changes in work environments. SUNLINE Belts meet various demands - from standard operations to specialty applications.

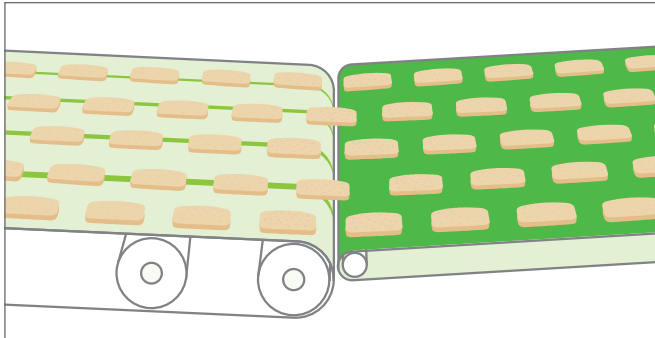


【 Small pulley and knife edge applications 】

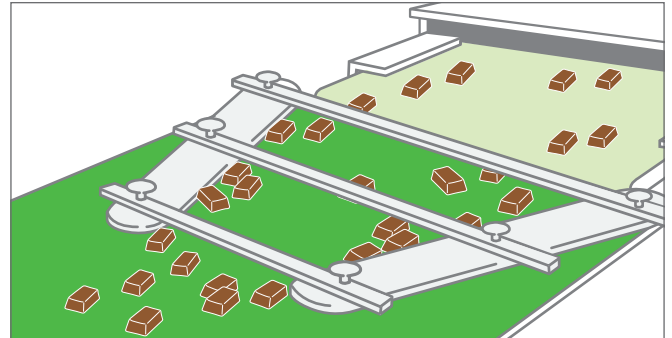


【 Less sticky 】

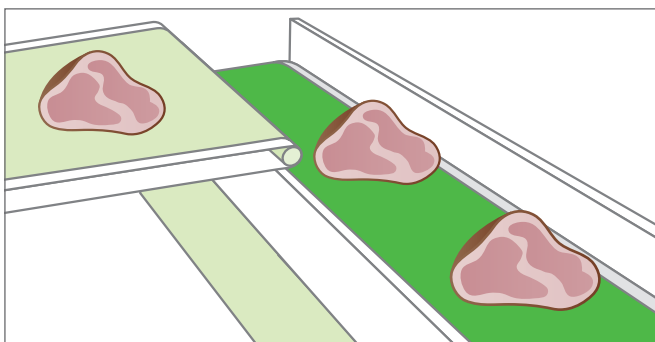


【 Long service life, even in applications requiring frequent cleaning or sterilization 】

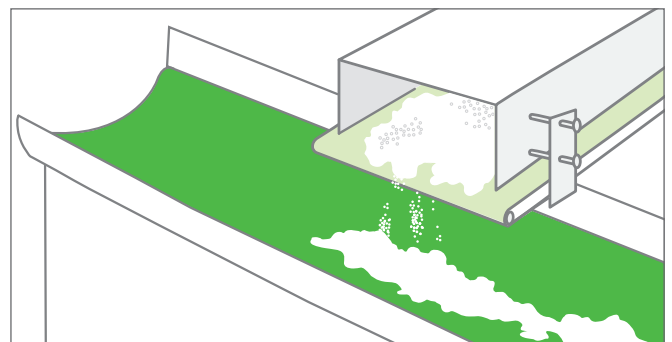


【 Trough-shaped conveyance for powder or bulk materials 】

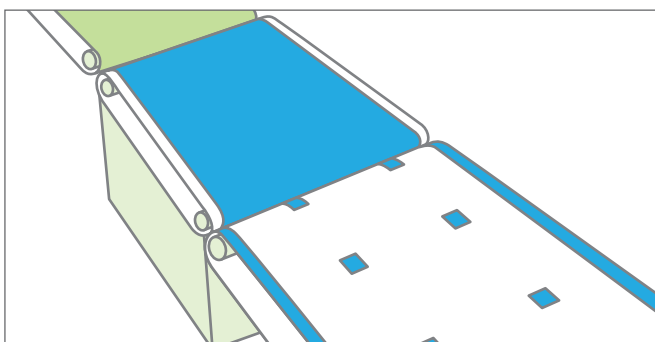


【 Available in blue to easily detect foreign object inclusion 】

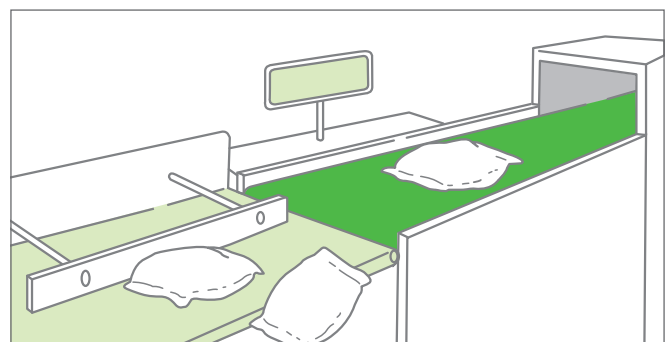

【 High precision seamless belts for scales 】

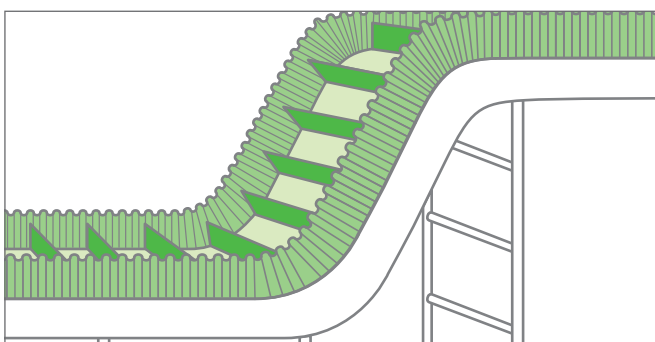

【 Inclined conveyance in narrow spaces 】

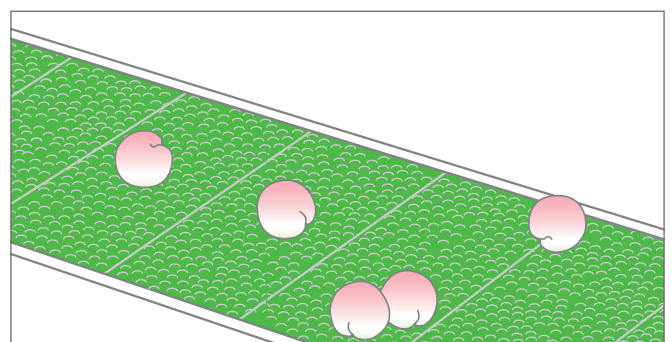


【 Prevents damage or rolling of fruits and vegetables 】


※Actual belt color may differ from those shown above.

Reliable, Effective, Low Noise, High Speed


Reliable and effective conveyance is the most basic function of conveyor belts. Our belts offer high speed and low noise conveyance, with applications ranging from sorting and slide applications to inclined conveyance. We have belts resistant to heat, oil and chemicals for use in a variety of manufacturing processes, and we can provide processing service.

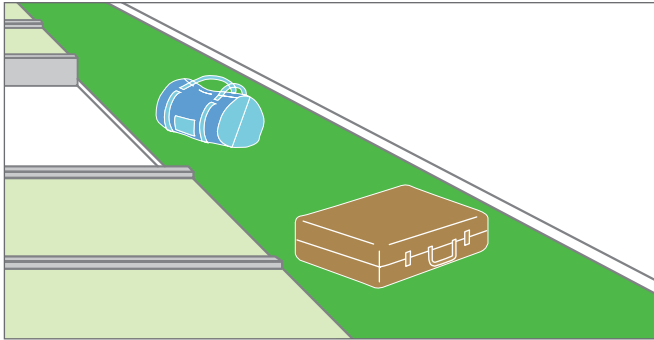


【 High speed conveyance for heavy baggage on airport conveyors 】

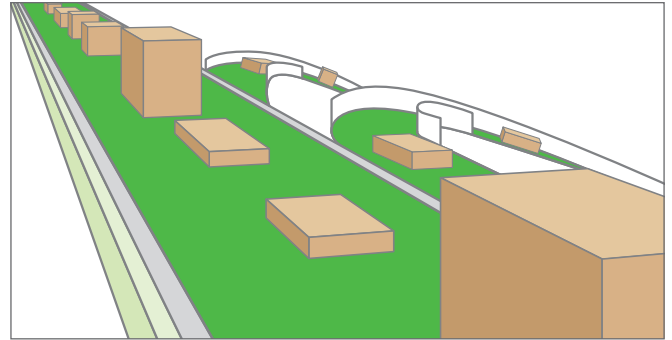


【 Slide conveyance for sorting lines 】

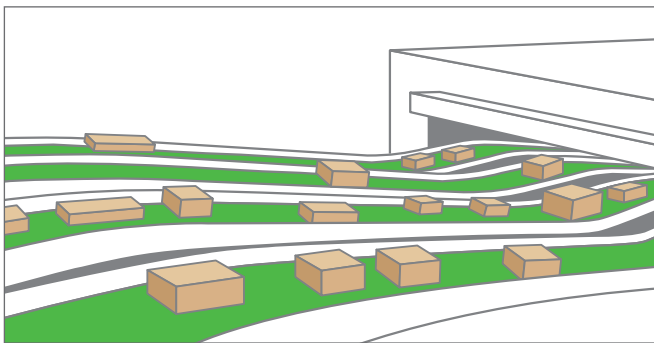


【 Inclined conveyance of boxes or bags 】

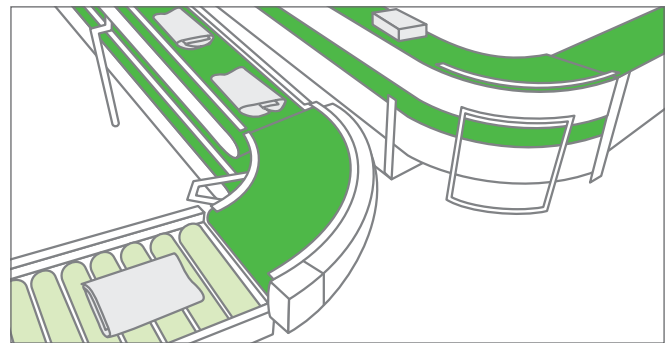


【 Flexible horizontal and vertical curves 】

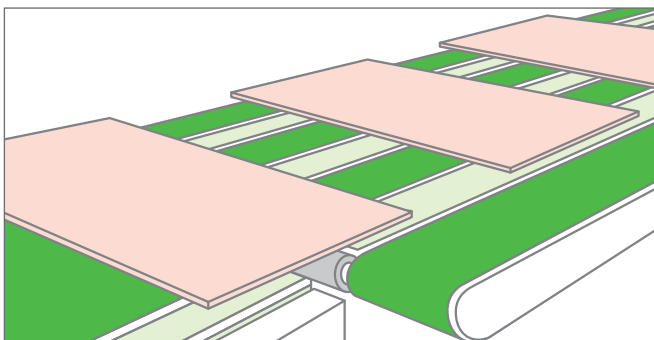


【 Multiple belts for large sized material such as plywood 】

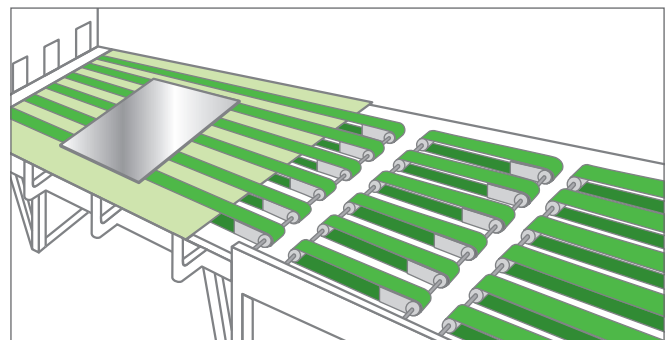

【 Post-press conveyance of steel plates and iron parts 】

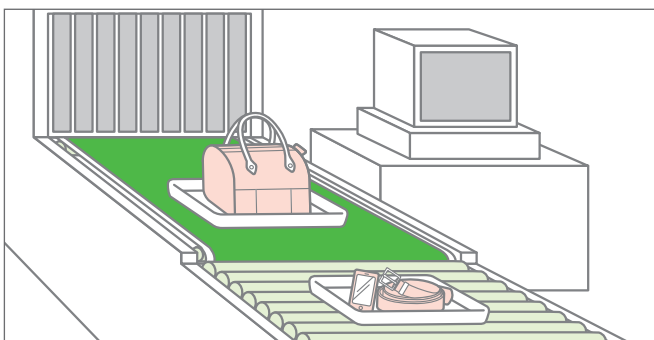


【 Inspection scanners 】

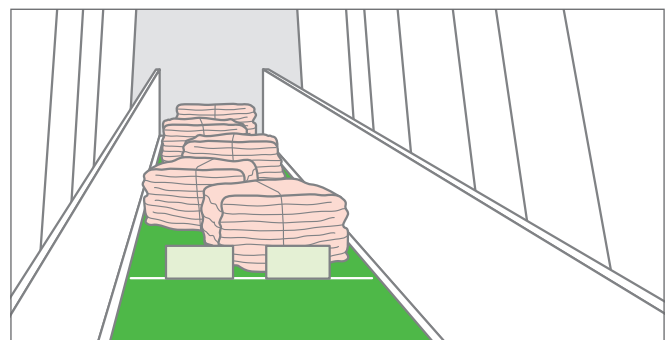

【 Cleats used in inclined conveyance 】

※Actual belt color may differ from those shown above.

How to Read Specifications

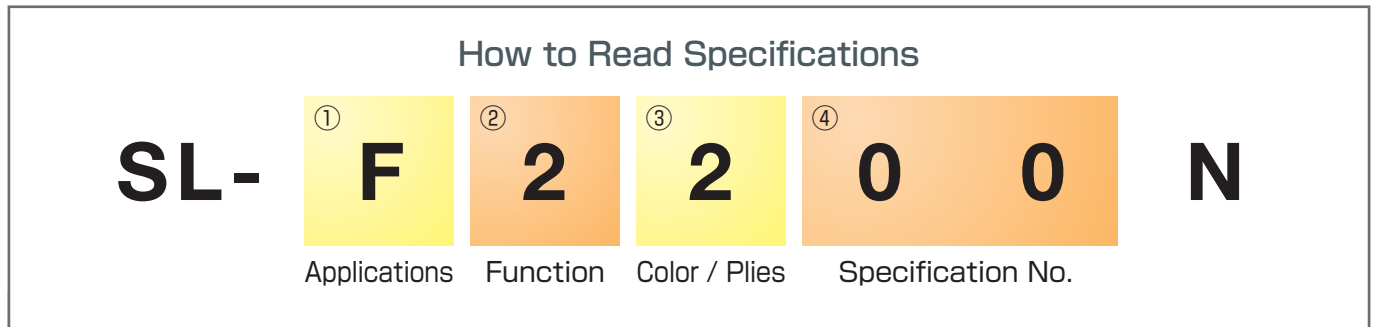

① Applications

- F : Unpackaged food conveyance S : Special specification and user type
M : Logistics and general purpose conveyance P : Seamless belts (Super SUNLINE Belts)

② Function

F : All belts are antibacterial, antifungal, and non-fray.

- 1 : Standard belts for unpackaged food
- 2 : For non-sticky unpackaged food
- 3 : Humidity and heat resistance, low thermal shrinkage for unpackaged food conveyance
- 4 : Flexibility in the direction of width for troughed conveyance of unpackaged food
- 0 : Canvas belt top for conveyance of unpackaged food

M : General purpose conveyance in various use conditions.

- 1 : Polyvinyl chloride cover (not available for unpackaged food)
- 2 : Standard general purpose (available for unpackaged food)
- 3 : Non-fray type for light load logistics (available for unpackaged food)
- 4 : Low noise type for mini computers and logistics (available for unpackaged food)
- 5 : Logistics slide conveyance (available for unpackaged food)
- 9 : Special PVC surface for steep incline conveyance (available for unpackaged food)
- 0 : Special polyurethane surface for steep incline conveyance (available for unpackaged food)
- C : Special rubber surface for steep incline conveyance (available for unpackaged food)

S : Custom designs to meet use conditions

- | | |
|------------------------------|--|
| 0 : Low noise | 7 : Curved belts, flex belts and special cleat belts |
| 1 : Heat and cold resistance | 8 : Special materials installed |
| 2 : Oil resistance | 9 : PVC / pipe conveyor belts for unpackaged food |
| 3 : Ultra anti-static | Y : Customized use |
| 5 : Non-penetration type | |

P : Seamless belts, suitable for conveying precision instruments (such as scales); may be used in small pulley and knife edge designs.

- | | |
|----------------------------------|--|
| 1 : Urethane | 5 : Silicon impregnated |
| 2 : PVC | 6 : Slide type |
| 3 : Humidity and heat resistance | 7 : Polyester |
| 4 : Ultra anti-static | 8 : Antibacterial, antifungal urethane |

③ Color / Plies (Belt cover color / Number of canvas plies)

1 : White / 1 ply	6 : Blue / 2 plies
2 : White / 2 plies	7 : Black / 1 ply
3 : Green / 1 ply	8 : Black / 2 plies
4 : Green / 2 plies	9 : Gray / 2 plies
5 : Blue / 1 ply	0 : Other color / Number of plies

④ Specification No. (S Series is sequentially numbered)

F·M :

00 : Standard type	11 : Top and backside covers both 0.2mm (Top: smooth and glossy / Backside: fabric)
01 : Standard type (fabric 2 plies / small pulley)	12 : Top and backside covers both 0.2mm (Top: smooth and glossy / Backside smooth and matte)
02 : Different color surface cover	13 : Both surfaces covered Top 0.5 / Backside 0.2mm (Top: smooth and glossy / Backside: smooth and matte)
03 : Surface cover thickness 2.0mm	14 : Top and backside covers both 0.5mm (Top: smooth and glossy / Backside: fabric)
04 : Textured surface cover Type N	15 : Fabric surface cover for small pulleys N3
05 : Special surface cover Type R7	16 : Surface covers for small pulley, different color
06 : Textured surface cover Type N3	17 : Silicon impregnation type for small pulley
07 : Special surface cover Type P1	N : New specification with same name
08 : Special surface cover Type P3	
09 : Special surface cover Type R1	
10 : Silicon impregnated	

Non-standard products are custom-made and distributors may not carry inventory.

S : The S Series are all numbered sequentially. Please refer to the corresponding page.

P : Please refer to page 29 in this catalog.

Selection

Please select belts using the procedure below.

Select belt series and type

Use the Selection Chart on pages 11-12 to choose the belt series and type. Progressively choosing one alternative in each section should result in proper belt selection.



Select the number of belt plies ①

Use the tables on the following pages regarding belt size and the weight of the materials transported to determine the necessary number of plies. If the result is one ply, and if pulley diameter is not a problem, two plies may be selected. (If the result is two plies, one ply cannot be selected.) Two-ply belts reduce the risk of snaking and offset.



Go to the page for series and type recommended by the Selection Chart.



Select the number of plies ② and decide on the belt type.

Choose plies from among “Ply Selection Based on Pulley Diameter” on page 10, and then select the belt type. In addition to standard belt selections for each series, you can select options, such as surface texture, covers on both belt surfaces, etc.

※ This procedure is for general purpose conveyor belts. If you use special belts, such as for marble grinders or vegetable slicers, please contact Bando or your distributor.

[Website for the Selection of Sunline Belts]

The procedures described in this catalog can be used on our website:

<https://sekkei.bando.co.jp/sunline/jpn/index.php/m/top>

Customers and distributors can easily select belt specifications on-site from your PC, smart phone or tablet computer. Or contact Bando or your distributor for a more detailed consultation.



Selection of the Number of Plies based on Pulley Diameter

1) Belt selection for existing conveyors

- Check the pulley diameter of the existing conveyor (Check R value if knife edge)
- Determine the belt series and type using the Selection Chart.
- Look for the same belt pulley diameter as that of the existing conveyor, or the minimum pulley diameter. (If using a knife edge, look for the belt with the same R value or a smaller one)
- The number of plies should match the plies necessary based on the conveyor size and weight of the material conveyed.

Example 1 The pulley diameter of the existing conveyor is 40mm and one ply is necessary (if the number of plies is 1, 2 plies may also be selected)

Series and type selection pages ▶▶▶

Belt type	Minimum pulley diameter	Number of plies
A	20 ← Select 40 or less	1 ← As the number of
B	40 ←	2 ← necessary plies is 1,
C	50	2 ← you can choose either 1 and 2.

- ▶▶▶ Belts A and B are available. Either belt would be suitable. Two-ply belts can reduce the risk of belt snaking and offset.

Example 2 The pulley diameter of the existing conveyor is 40mm and two plies are necessary.

Series and type selection pages ▶▶▶

Belt type	Minimum pulley diameter	Number of plies
A	20 ← Select 40 or less	1
B	40 ←	2 ← Number of plies necessary is 2
C	50	2 ← Only 2 plies is appropriate

- ▶▶▶ Belt B is appropriate

Example 3 The pulley diameter of the existing conveyor is 30mm and two plies are necessary.

Series and type selection pages ▶▶▶

Belt type	Minimum pulley diameter	Number of plies
A	20 ← Select 30 or less	1
B	40	2 ← Number of plies necessary is 2
C	50	2 ← Only 2 plies is appropriate

- ▶▶▶ If no belt is appropriate, please contact Bando or your distributor for a design review.

2) New conveyor designs

- Choose the series and type from the chart.
- Choose the number of plies necessary based on the conveyor size and the weight of the material conveyed.
- Select the belt matching the series and type, and the necessary number of plies.
- Verify the minimum pulley diameter and the knife edge R, and design the conveyor.
- Check the minimum drive pulley diameter for the design. Please refer to the design manual instructions.

Note) There is a relationship between motor capacity and the number of plies

Check these items when selecting belts for existing conveyors.


- 1) Check the conveyor's motor capacity.
- 2) Check whether the number of plies is correct in the table below.

Motor capacity	40W or less	40~200W	200W or more
Number of plies selected	1ply	1 ply or 2 plies	2ply


- The table above is applicable for most general-purpose conveyors.
- 200W motors are needed for 1-ply applications for high-speed conveyors, stretch-type conveyors or 24-hour operation.

- 3) If you cannot find an appropriate belt, the conveyor may be for special use or specially designed. Please consult with Bando or your distributor.

Selection Chart

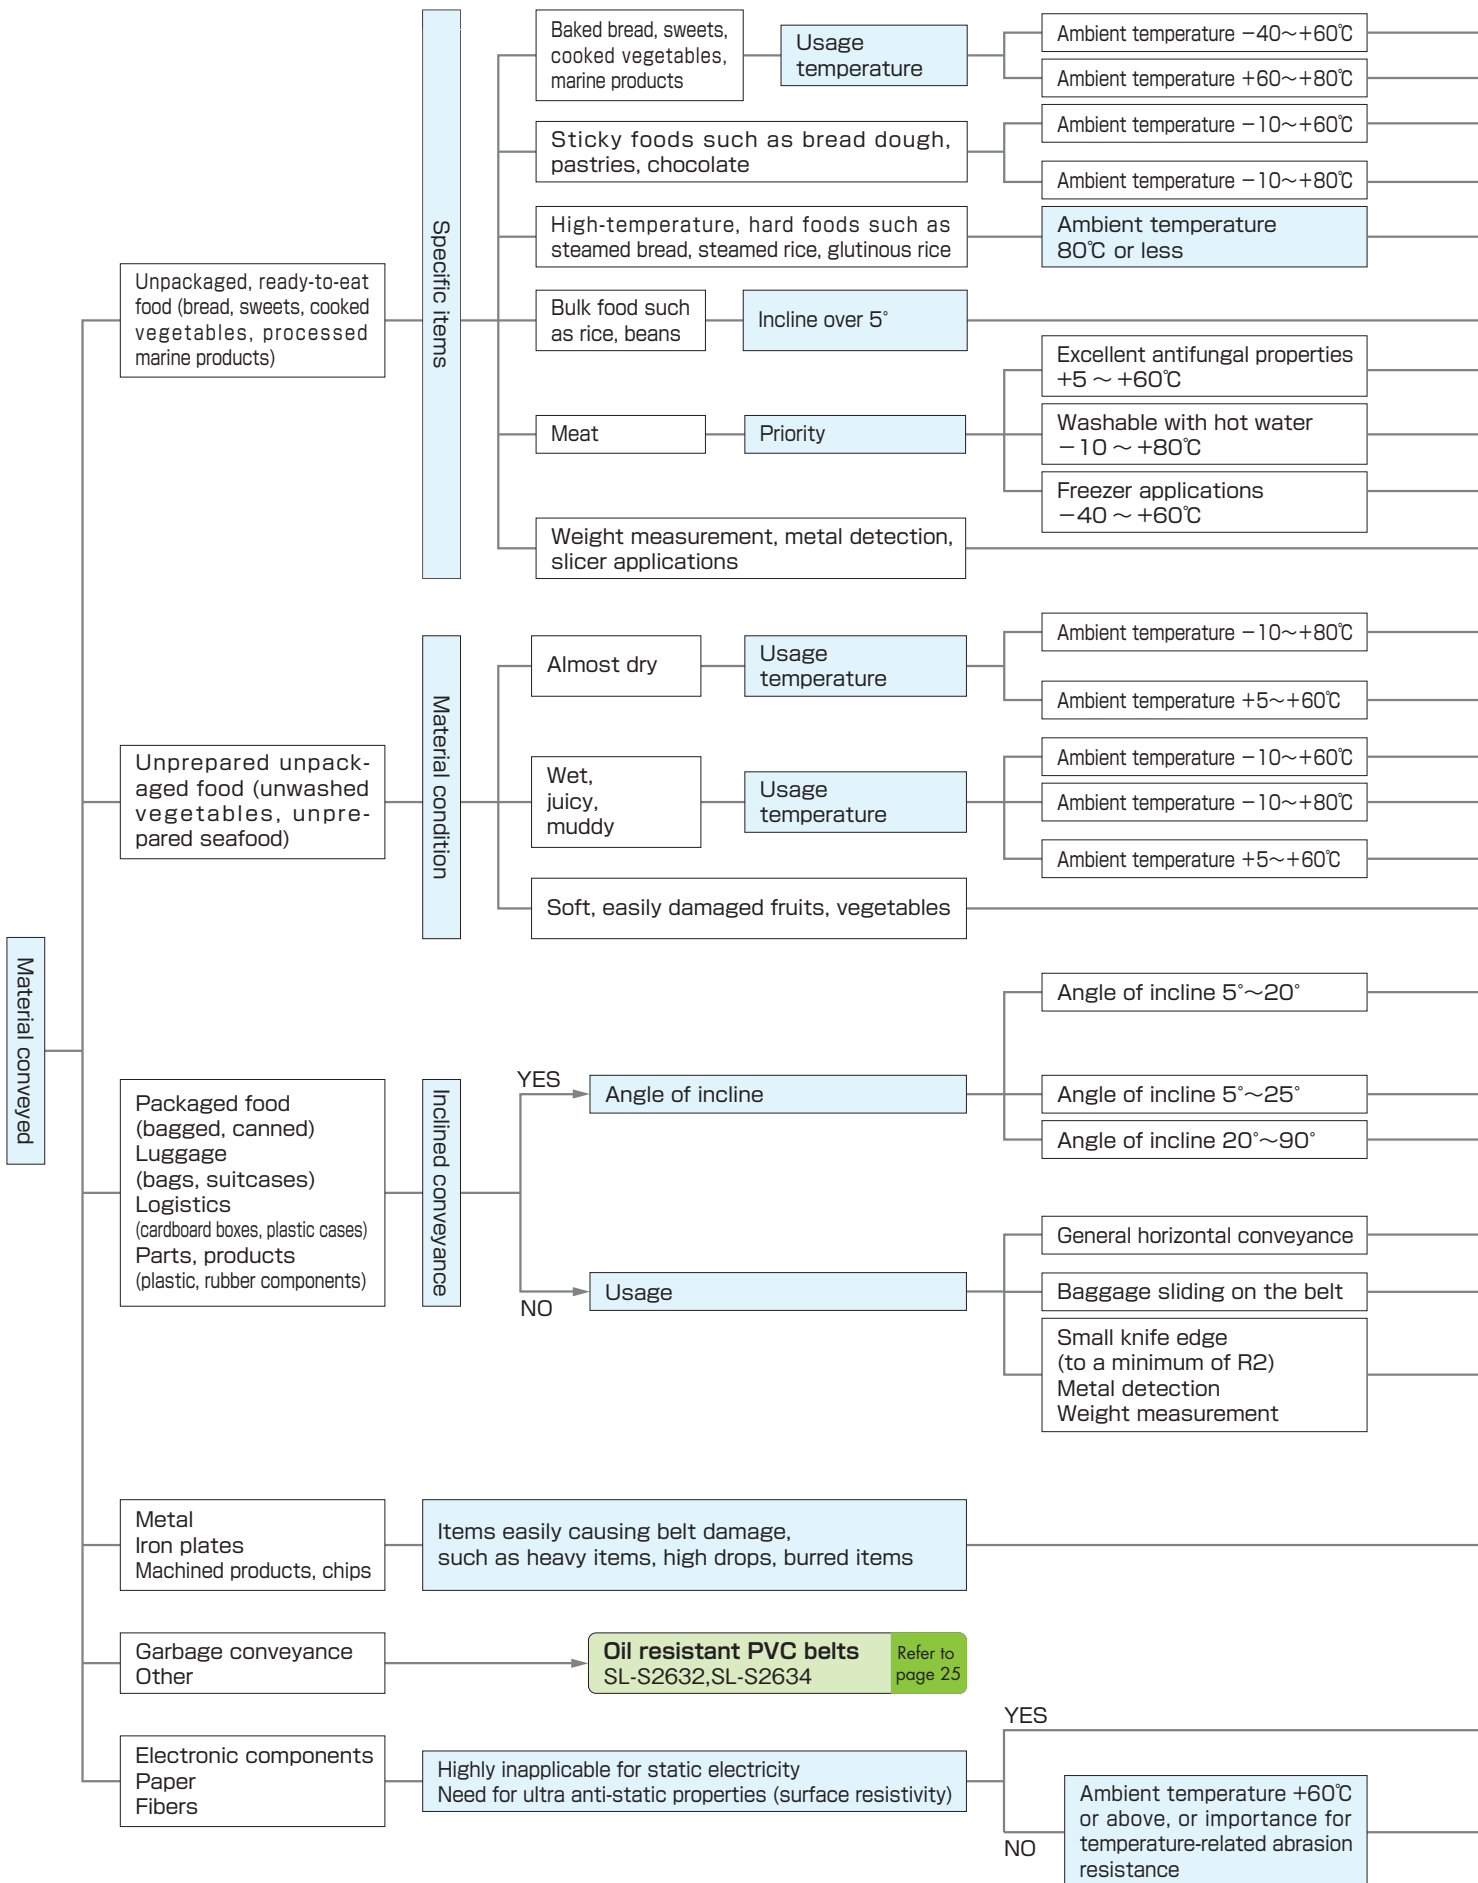

Selection chart

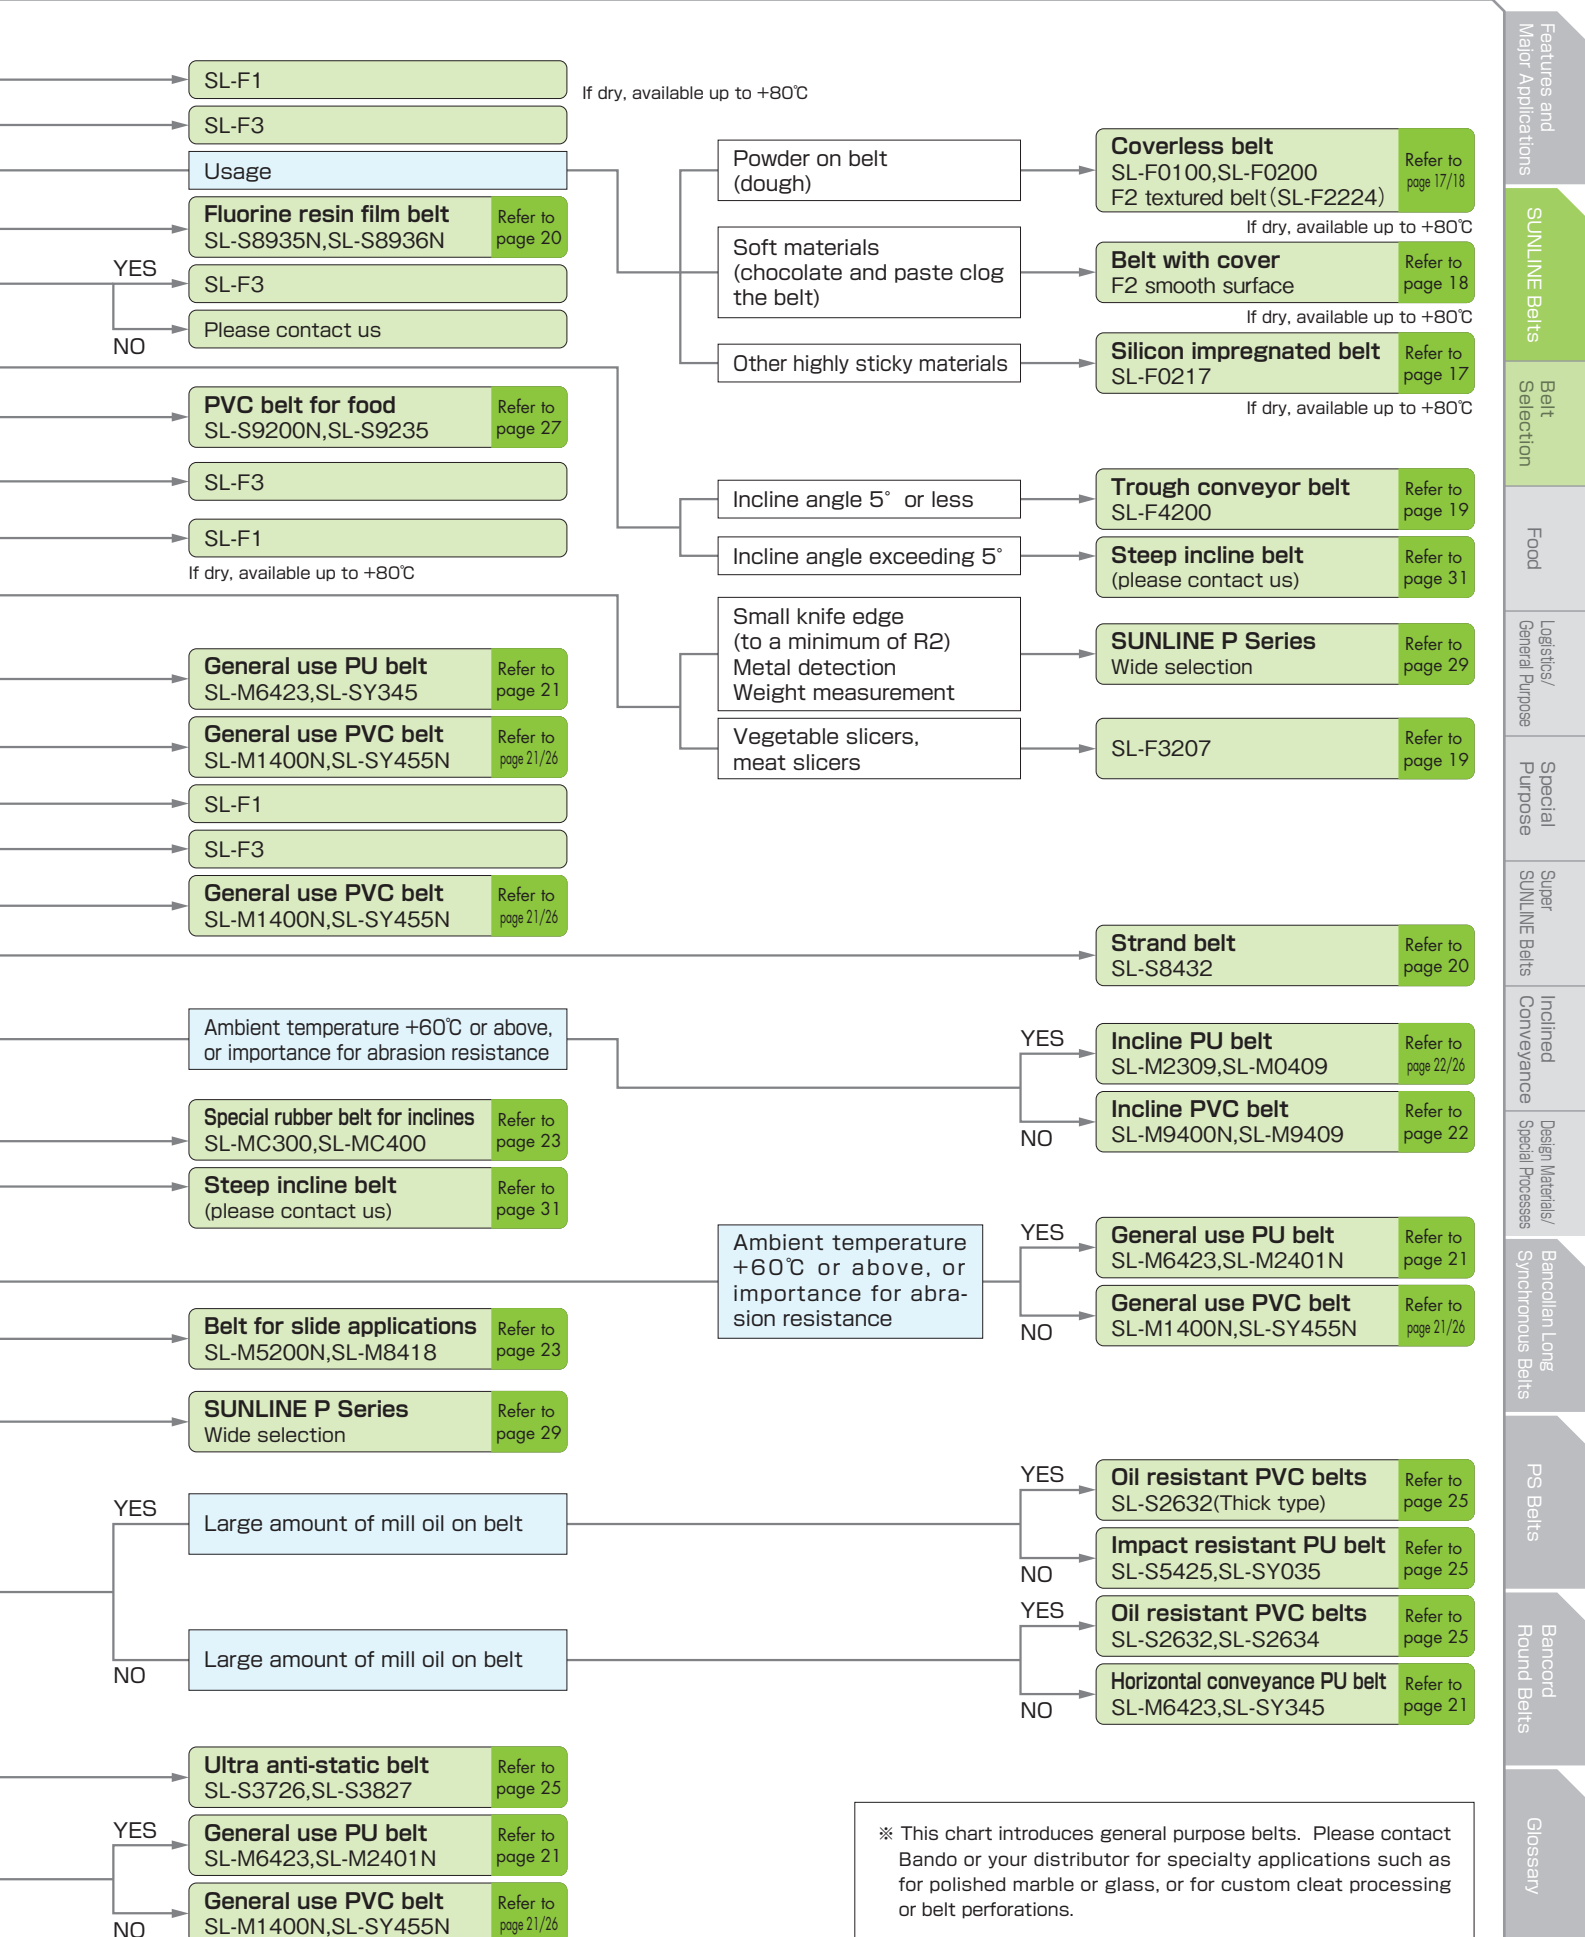

Features and Major Applications

SUNLINE Belts

Belt Selection

Food

Logistics/General Purpose

Special Purpose

Super SUNLINE Belts

Inclined Conveyance

Design Materials/Special Processes

Bancorlon Long Synchronous Belts


PS Belts

Bancord Round Belts


Glossary

Ply Requirement Table for Food Conveyance Applications (F Series)


1. Conveyor length 2.0m or less

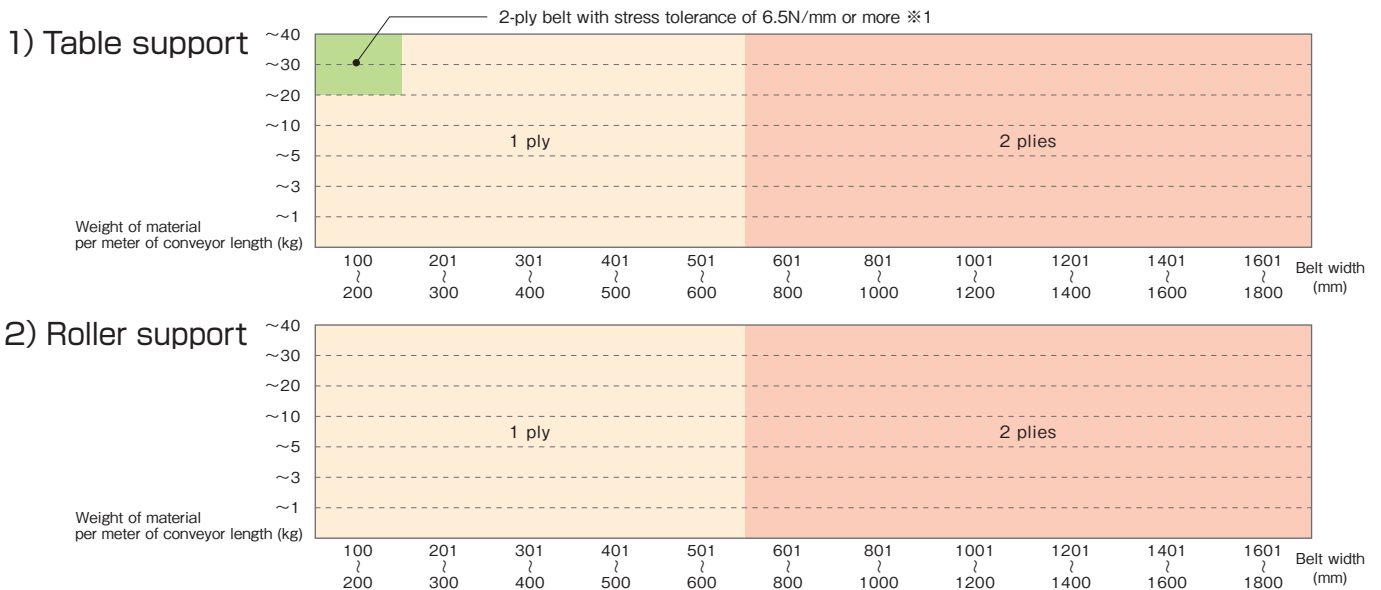


2. Conveyor length 2.1~5.0m

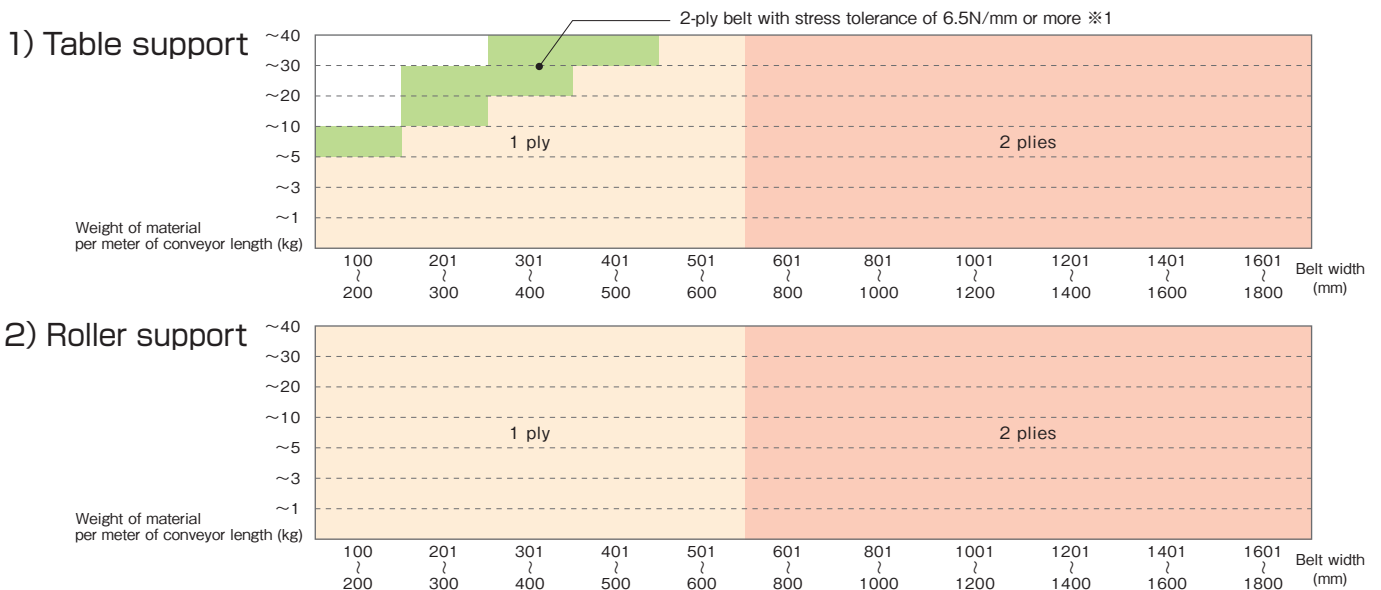

3. Conveyor length 5.1~10.0m

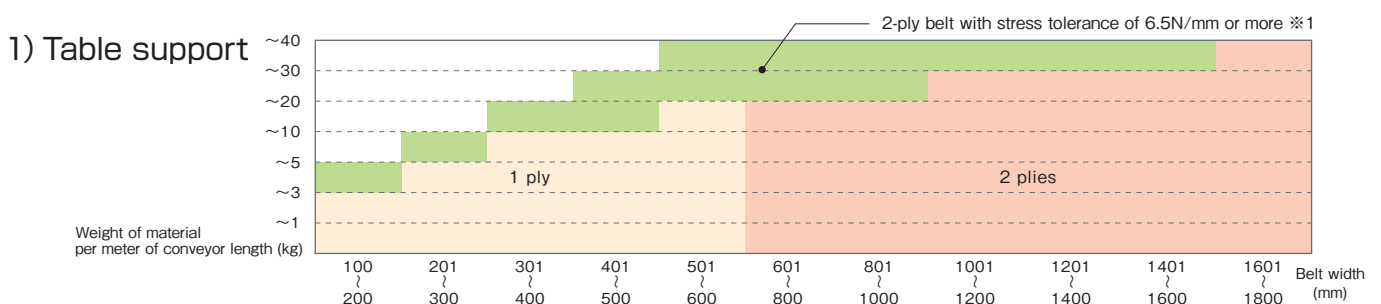


2) Roller support

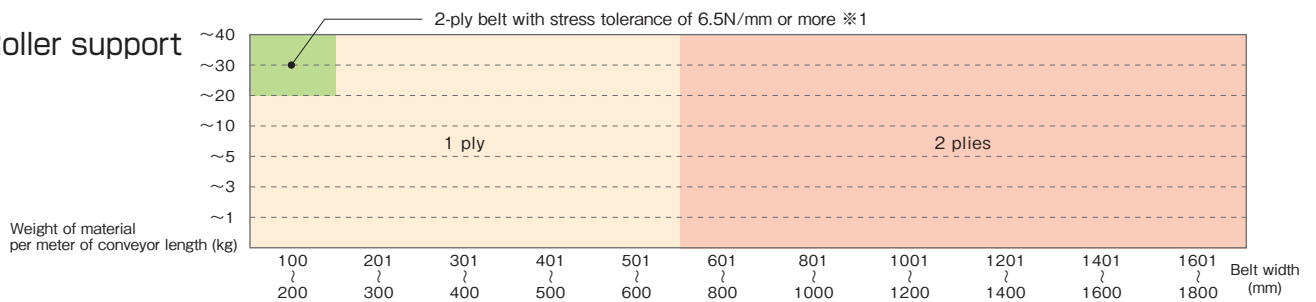


4. Conveyor length 10.1 ~ 15.0m

1) Table support

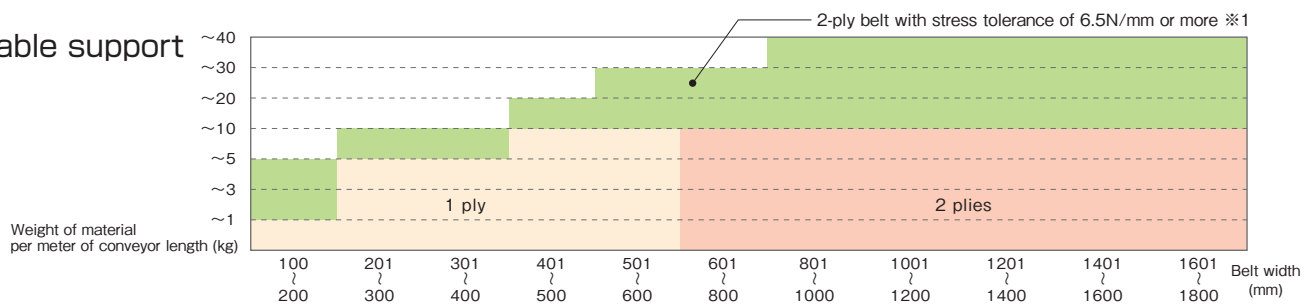


2) Roller support

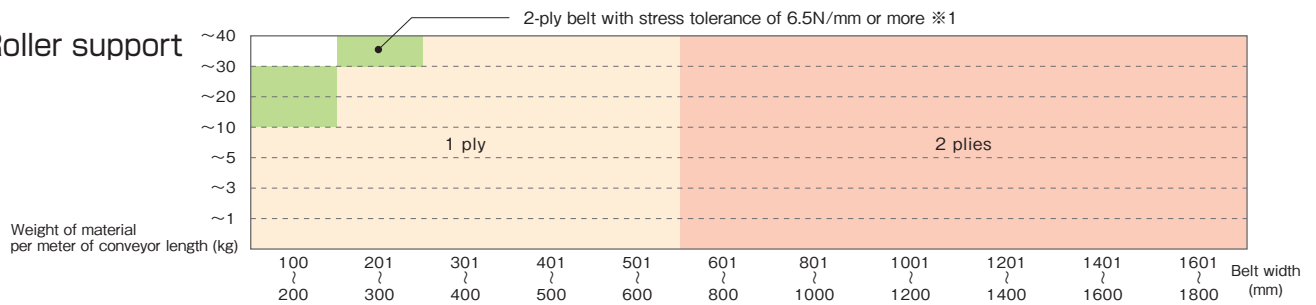


5. Conveyor length 15.1 ~ 20.0m or less

1) Table support

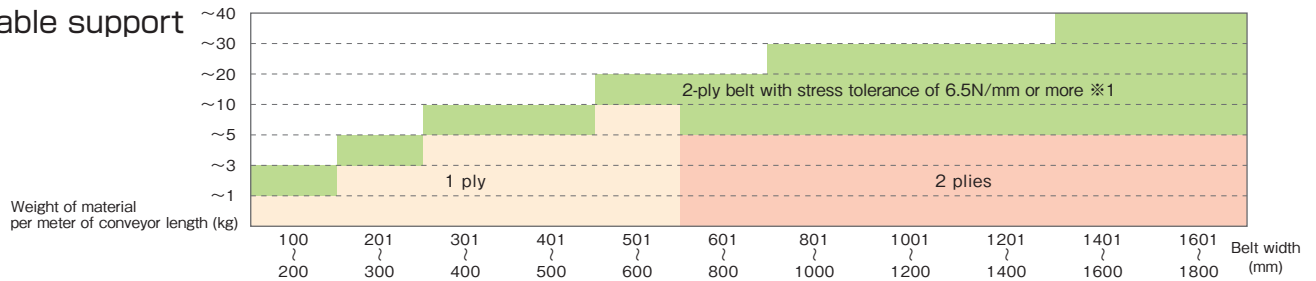



2) Roller support

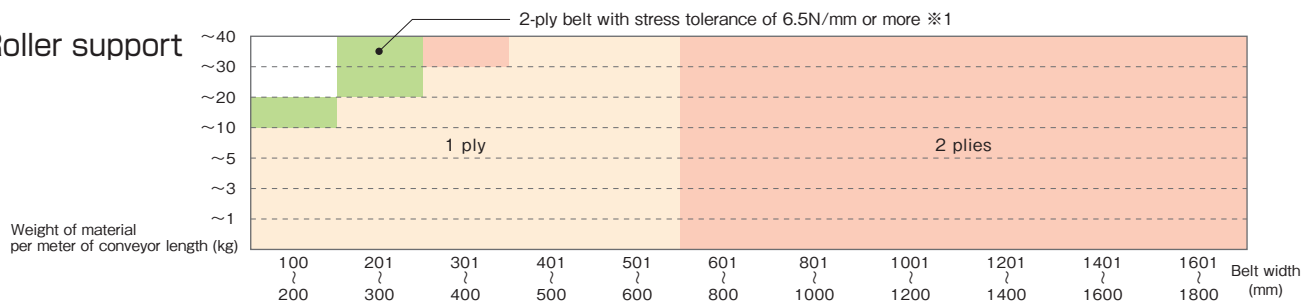



※1 2-ply belt with stress tolerance of 6.5N/mm or more : SL-F3202 · F3206N · F3207 · F3211 · F3611 · F4200

Ply Requirement Table for Logistics, General and Specialty Conveyance Applications (M, S Series)


1. Conveyor length 2.0m or less

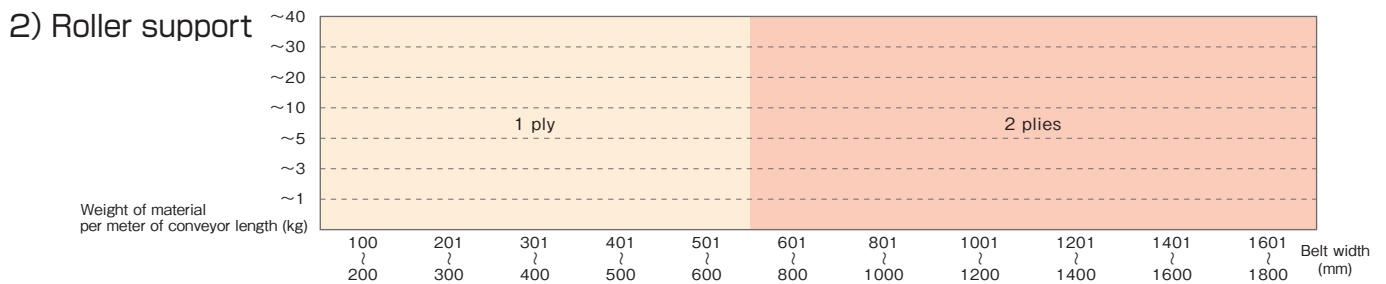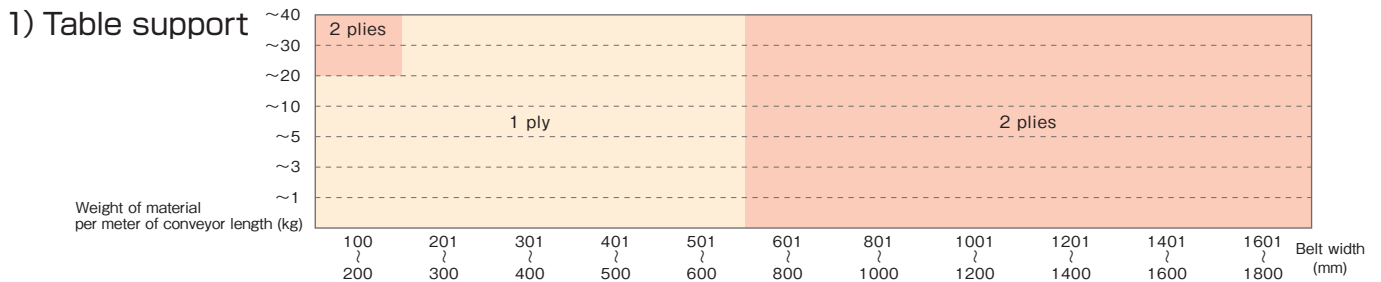


2. Conveyor length 2.1~5.0m

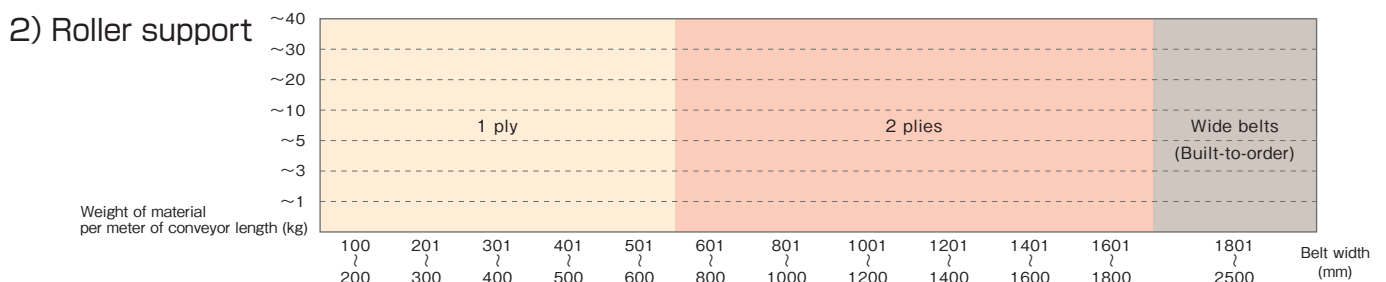
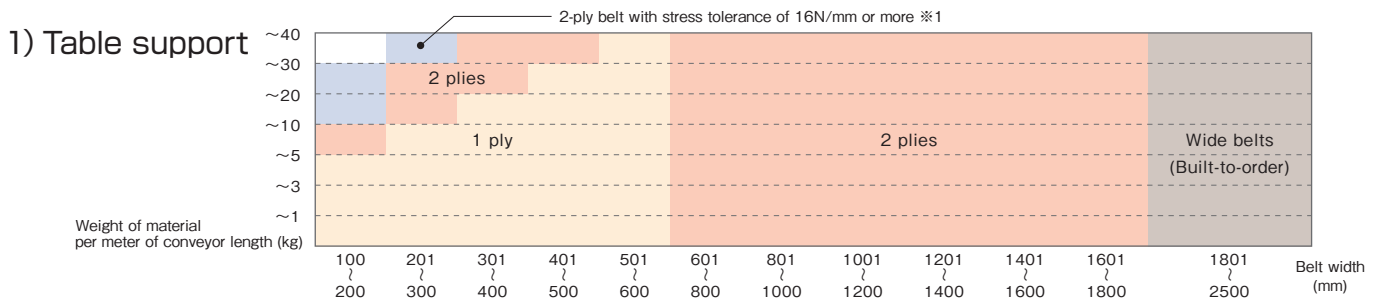


3. Conveyor length 5.1~10.0m


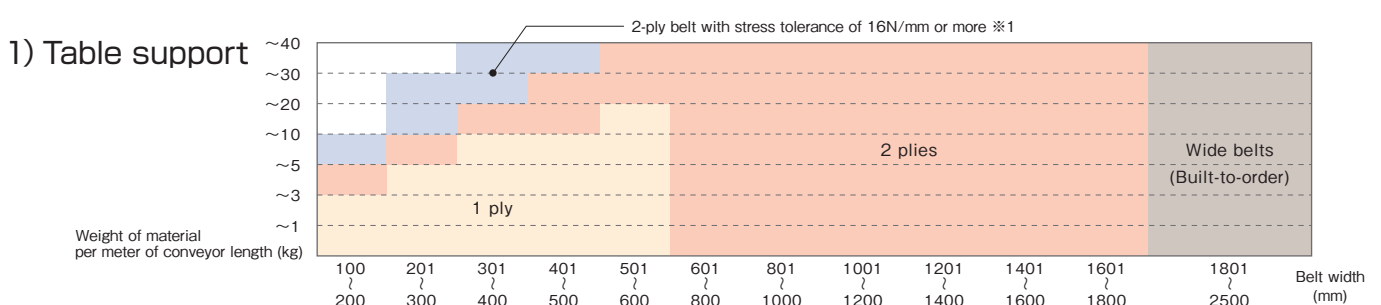


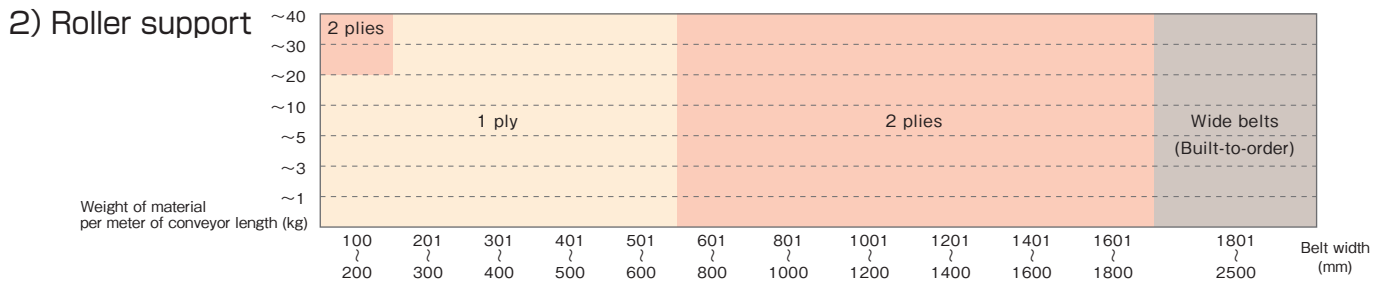

4. Conveyor length 10.1 ~ 15.0m

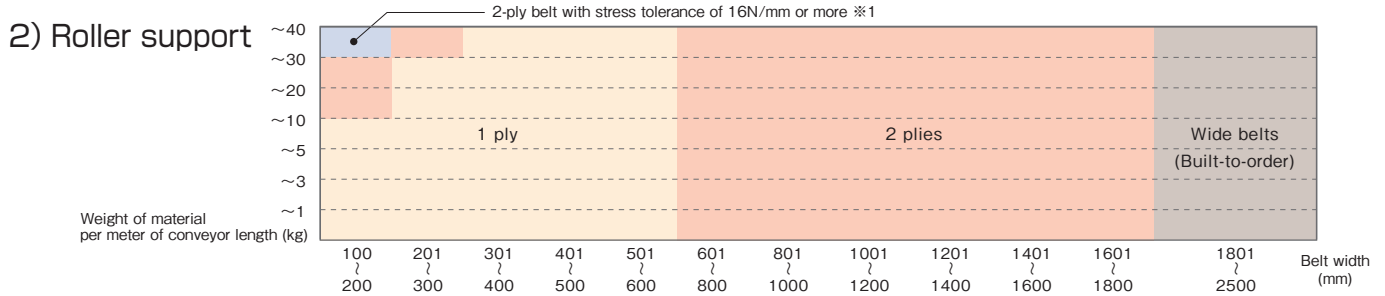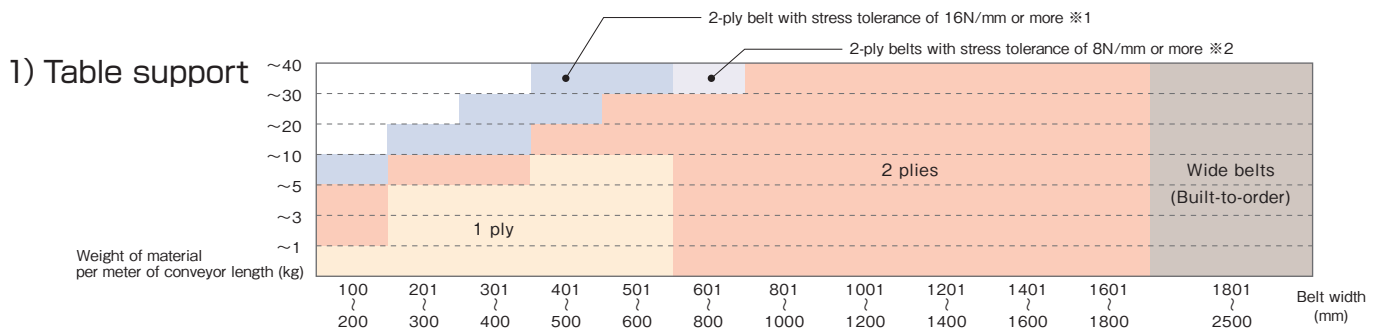

5. Conveyor length 15.1 ~ 20.0m or less

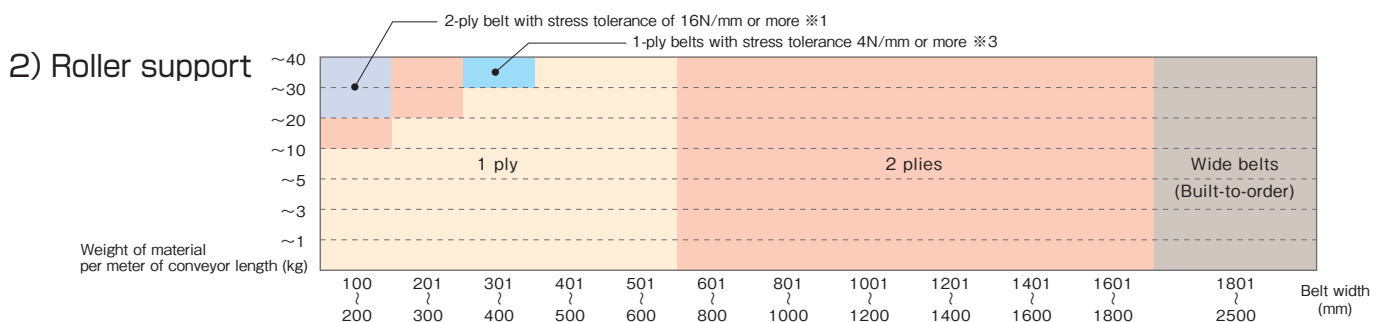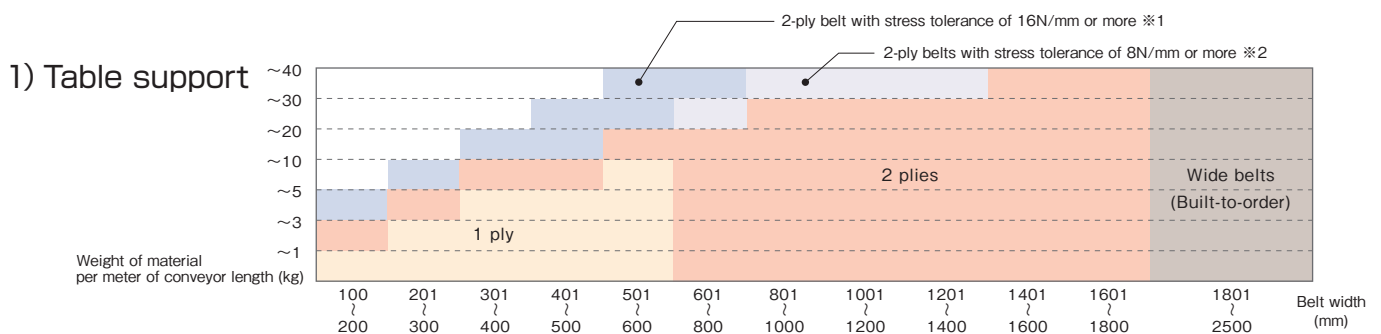

※1 2-ply belt with stress tolerance of 16N/mm or more : SL-S5425

※2 2-ply belts with stress tolerance of 8N/mm or more, except the following specifications :

SL-M2401 · SL-M4201 · SL-M5201N · SL-M5422 · SL-S1239 · SL-S6235N · SL-S6400 · SL-S6404 · SL-S6933N · SL-S8231N · SL-S9200 · SL-SY045 · SL-SY456N

※3 1-ply belts with stress tolerance 4N/mm or more :

SL-M2309 · SL-M4100 · SL-M4300 · SL-M5100 · SL-M5302 · SL-MC300 · SL-S7100 · SL-S7300 · SL-SY040 · SL-SY533 · SL-SY534













F Series Belts for Food Conveyance

Belts for Unpackaged Food Conveyance

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Non-fray	Antibacterial Antifungal	Humidity and heat resistance (°C)	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough							
[1] No top cover. Excellent slide and separation properties. Applicable for materials alignment and dough conveyance applications																
SL-F0100★	1	0.7	0.6	25/R3	—	—	○	○	×	0.15	0.15	○	○	60	600	
SL-F0200★	2	1.1	1.0	25/R5	30/R10	—	○	○	△	0.15	0.25	○	○	60	1800	
SL-F0217★	2	1.1	1.0	—	35	40	○	○	△	0.1	0.25	○	○	60	1600	
[2] Standard belt for unpackaged food																
SL-F1100★	1	0.9	0.8	15/R3	20/R5	25	○	○	×	0.3	0.15	○	○	60	600	
SL-F1111	1	1.2	1.0	15/R5	25/R10	30	×	○	×	0.3	0.3	○	○	60	600	
SL-F1120	1	1.3	1.3	25	30	35	○	○	×	0.3	0.2	○	○	60	600	
SL-F1121★	1	1.0	1.2	15/R5	—	—	○	○	×	0.3	0.2	○	○	60	600	
SL-F1201★	2	1.3	1.1	10/R2	15/R3	25	○	○	△	0.3	0.15	○	○	60	1800	
SL-F1204	2	1.3	1.2	15/R3	20/R5	25	○	○	△	0.3	0.15	○	○	60	1800	
SL-F1206N	2	1.6	1.4	20/R5	25/R8	30	○	○	△	0.4	0.15	○	○	60	1800	
SL-F1211	2	1.5	1.3	25/R8	30/R10	40	×	○	△	0.3	0.3	○	○	60	1800	
SL-F1218★	2	1.3	1.1	15/R3	20/R5	25	○	○	△	0.3	0.15	○	○	60	1800	













○: Suitable (functional) △: May be suitable. Please contact Bando or your distributor. ×: Not suitable —: Not functional

<p>■ SL-F0100★</p>  <p>Top/Backside</p> <p>Material PET/PET</p> <p>Color White/White</p> <p>Profile Impregnated/Impregnated</p>	<p>■ SL-F0200★</p>  <p>Top/Backside</p> <p>Material PET/PET</p> <p>Color White/White</p> <p>Profile Impregnated/Impregnated</p>	<p>■ SL-F0217★</p>  <p>Top/Backside</p> <p>Material PET/PET</p> <p>Color Light blue/White</p> <p>Profile Silicon impregnated/Impregnated</p>	<p>■ SL-F1100★</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-F1111</p>  <p>Top/Backside</p> <p>Material PU/PU</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Grainy(N)</p>	<p>■ SL-F1120</p>  <p>Top/Backside</p> <p>Material PU/PU</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Grainy(N3)</p>
<p>■ SL-F1121★</p>  <p>Top/Backside</p> <p>Material PU/PU</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Grainy(N)</p>	<p>■ SL-F1201★</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-F1204</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Grainy(N)/Impregnated</p>	<p>■ SL-F1206N</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Grainy(N3)/Impregnated</p>	<p>■ SL-F1211</p>  <p>Top/Backside</p> <p>Material PU/PU</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Grainy(N)</p>	<p>■ SL-F1218★</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Impregnated</p>

PU: Polyurethane PET: Polyester

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Non-fray	Antibacterial Antifungal	Humidity and heat resistance (°C)	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough							
[2] Standard belt for unpackaged food																
SL-F1220	2	2.0	2.0	45	55	60	○	○	△	0.3	0.2	○	○	60	1800	
SL-F1502	1	0.9	0.8	15/R3	20/R5	25	○	○	×	0.25	0.15	○	○	60	600	
SL-F1601N	2	1.3	1.1	15/R3	20/R5	25	○	○	△	0.3	0.15	○	○	60	1800	
SL-F1611	2	1.5	1.3	25/R8	30/R10	40	×	○	△	0.3	0.3	○	○	60	1800	
[3] Excellent non-stick properties, ideal for conveyance of sticky materials, such as dough or chocolate																
SL-F2100	1	1.0	0.9	20/R5	25/R8	—	○	○	×	0.2	0.15	○	○	60	600	
SL-F2104	1	1.1	1.0	20/R5	25/R8	—	○	○	×	0.2	0.15	○	○	60	600	
SL-F2105	1	1.4	1.4	25/R8	30/R10	—	○	○	×	0.2	0.15	○	○	60	600	
SL-F2200N★	2	1.4	1.2	15/R5	30	—	○	○	△	0.2	0.15	○	○	60	1800	
SL-F2205N	2	1.7	1.7	15/R5	30	—	○	○	△	0.2	0.15	○	○	60	1800	
SL-F2224★	2	1.4	1.3	15/R5	30	—	○	○	△	0.2	0.15	○	○	60	1800	
SL-F2601	2	1.4	1.3	15/R5	30	—	○	○	△	0.2	0.15	○	○	60	1800	
SL-F2624	2	1.4	1.3	15/R5	30	—	○	○	△	0.2	0.15	○	○	60	1800	

○ : Suitable (functional) △ : May be suitable. Please contact Bando or your distributor. × : Not suitable — : Not functional

<p>■ SL-F1220</p>  <p>Top/Backside</p> <p>Material PU/PU</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Grainy(N3)</p>	<p>■ SL-F1502</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color Blue/White</p> <p>Profile Smooth and matte/Impregnated</p>	<p>■ SL-F1601N</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color Blue/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-F1611</p>  <p>Top/Backside</p> <p>Material PU/PU</p> <p>Color Blue/Blue</p> <p>Profile Smooth and glossy/Grainy(N)</p>	<p>■ SL-F2100</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-F2104</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Grainy(N)/Impregnated</p>
<p>■ SL-F2105</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Special (R7)/Impregnated</p>	<p>■ SL-F2200N★</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-F2205N</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Special (R7)/Impregnated</p>	<p>■ SL-F2224★</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Grainy(N)/Impregnated</p>	<p>■ SL-F2601</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color Blue/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-F2624</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color Blue/White</p> <p>Profile Grainy(N)/Impregnated</p>

PU : Polyurethane PET : Polyester

F Series Belts for Food Conveyance

Belts for Unpackaged Food Conveyance

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Non-fray	Antibacterial Antifungal	Humidity and heat resistance (°C)※1	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough							
<p>[4] Excellent humidity, heat (constant 80°C), and chemical resistance. For use in heat-sterilized lines, meat and seafood processing, cooked rice conveyance, etc. Excellent heat durability, and can withstand exposure to chemical cleansing (sodium hypochlorite, etc.) at temperatures up to 100°C.</p>																
SL-F3102N★	1	0.9	0.8	20/R5	25	—	○	○	×	0.3	0.15	○	○	80(70)	600	
SL-F3106N	1	1.1	1.1	20/R5	25	—	○	○	×	0.4	0.15	○	○	80(70)	600	
SL-F3202★	2	1.5	1.4	25/R10	30	—	○	○	△	0.3	0.15	○	○	80(70)	1800	
SL-F3206N	2	1.7	1.7	25/R10	30	—	○	○	△	0.4	0.15	○	○	80(70)	1800	
SL-F3207	2	2.6	2.6	40	45	—	○	○	△	0.5	0.15	○	○	80(70)	1800	
SL-F3211★	2	1.8	1.6	50	55	—	×	○	△	0.3	0.3	○	○	80(70)	1800	
SL-F3611	2	1.8	1.6	50	55	—	×	○	△	0.3	0.4	○	○	80(70)	1800	
SL-F3500★	1	0.9	0.8	20/R5	25	—	○	○	×	0.3	0.15	○	○	80(70)	600	
<p>[5] Bulk (granular) conveyance requiring troughs</p>																
SL-F4200	2	1.8	1.6	50	50	50	×	○	○	0.25	0.25	○	○	60	1800	

○: Suitable (functional) △: May be suitable. Please contact Bando or your distributor. ×: Not suitable —: Not functional

※1 The figures in () indicate the temperature of humidity and heat resistance at finger joints

SL-F3102N ★



Top/Backside

Material PU/PET

Color White/White

Profile Smooth and glossy/Impregnated

SL-F3106N



Top/Backside

Material PU/PET

Color White/White

Profile Grainy(N3)/Impregnated

SL-F3202 ★




Top/Backside

Material PU/PET

Color White/White

Profile Smooth and glossy/Impregnated

SL-F3206N




Top/Backside

Material PU/PET

Color White/White

Profile Grainy(N3)/Impregnated

SL-F3207



Top/Backside

Material PU/PET

Color White/White

Profile Grainy(P1)/Impregnated

SL-F3211 ★



Top/Backside

Material PU/PU

Color White/White

Profile Smooth and glossy/Grainy(N)

SL-F3611



Top/Backside

Material PU/PU

Color Blue/Blue

Profile Smooth and matte/Grainy(N)

SL-F3500 ★




Top/Backside

Material PU/PU

Color Blue/White

Profile Smooth and matte/Impregnated

SL-F4200



Top/Backside

Material PU/PU

Color White/White

Profile Smooth and matte/Smooth and matte

PU: Polyurethane PET: Polyester

Other Belts for Food Conveyance

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Non-fray	Antibacterial Antifungal	Humidity and heat resistance (°C)	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough							
[6] Teflon film-coated top gives a high degree of non-stickiness and chemical resistance.																
SL-S8935N	2	1.6	1.5	—	75	—	○	○	△	0.1	0.15	—	—	80	1200	5FKDBE TS
SL-S8936N	2	1.7	1.6	—	75	—	×	○	△	0.1	0.3	—	—	80	1200	5FKDB2/AW2E TF
[7] Belt for fruit sorters that prevent rolling and damage to fruits and vegetables while being conveyed ※ Not suitable for unpackaged food conveyance																
SL-S8432	2	8.0	12.0	—	—	100	○	○	×	1.0	0.15	—	—	40	1200	Strand belt
[8] Belts with plastic buckets attached for bucket elevators to lift or lower materials																
SL-S9235	2	2.6	2.4	80	80	80	×	○	△	0.4	0.4	—	○	40	1800	8CW5/W5JE FF
SL-SY292★	2	3.2	2.9	100	100	100	×	○	○	0.4	0.5	○	○	40	1800	8YCW FN

○: Suitable (functional) △: May be suitable. Please contact Bando or your distributor. ×: Not suitable —: Not functional

<p>■ SL-S8935N</p>  <p>Top/Backside</p> <p>Material Teflon/PET</p> <p>Color Blue/White</p> <p>Profile Film/Impregnated</p>	<p>■ SL-S8936N</p>  <p>Top/Backside</p> <p>Material Teflon/PU</p> <p>Color Blue/White</p> <p>Profile Film/Smooth and matte</p>	<p>■ SL-S8432</p>  <p>Top/Backside</p> <p>Material PVC/PET</p> <p>Color Green/White</p> <p>Profile Strand/Impregnated</p>	<p>■ SL-S9235</p>  <p>Top/Backside</p> <p>Material PVC/PVC</p> <p>Color White/White</p> <p>Profile Smooth and matte/Smooth and matte</p>	<p>■ SL-SY292★</p>  <p>Top/Backside</p> <p>Material PVC/PVC</p> <p>Color White/White</p> <p>Profile Smooth and matte/Grainy(N)</p>
---	---	--	--	---

PU: Polyurethane PET: Polyester PVC: Polyvinyl chloride

M Series Belts for Logistics and General Conveyance Applications



General Purpose Belts

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Unpackaged food	Non-fray	5 deg incline	Low noise	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough								
[9] General purpose, standard belts																	
SL-M0409★	2	2.2	2.1	50	50	55	○	○	△	1.7	0.1	○	—	○	○	1800	8MUGE R10
SL-M1414N	2	3.0	2.6	60	60	60	×	○	△	0.4	0.5	—	—	○	—	2000	8CG5/ G5E HN
SL-M2401N★	2	1.5	1.4	25/R8	30/R10	40	○	○	△	0.3	0.15	○	○	—	—	1800	
SL-M6423★	2	1.5	1.4	35	40	40	○	○	△	0.3	0.1	○	—	—	○	1800	8MUGE HO
SL-SY163N	1	1.0	0.9	20/R5	25/R8	30	○	○	×	0.3	0.15	○	○	—	—	600	4DUWE NF HS
SL-SY456N★	2	1.7	1.6	50	55	60	×	○	△	0.3	0.3	○	—	—	—	1800	8UG2/ G2E HN
[10] Wide selection of belts for general logistics applications																	
SL-M1400N★	2	2.2	2.0	50	50	50	○	○	△	0.4	0.15	—	—	○	—	3000	8CGE HS
SL-M1403N	2	3.6	3.3	75	75	75	○	○	△	0.4	0.15	—	—	○	—	3000	8CG20E HS
SL-SY458	2	1.5	1.4	35	40	45	○	○	△	0.3	0.15	○	—	—	—	2500	8HUGE HS
SL-S6404	2	1.8	1.6	25	30	35	○	○	△	1.7	0.15	○	○	○	—	1800	

○: Suitable (functional) △: May be suitable. Please contact Bando or your distributor. ×: Not suitable —: Not functional

■ SL-M0409 ★



Top/Backside

Material PU/PET

Color Green/White

Profile Grooved(R1)/Fabric surface

■ SL-M1414N




Top/Backside

Material PVC/PVC

Color Green/Green

Profile Smooth and matte/Grainy(N)

■ SL-M2401N ★




Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and glossy/Impregnated

■ SL-M6423 ★



Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and glossy/Fabric surface

■ SL-SY163N



Top/Backside

Material PU/PET

Color White/White

Profile Smooth and glossy/Impregnated

■ SL-SY456N ★




Top/Backside

Material PU/PU

Color Green/Green

Profile Smooth and glossy/Grainy(N)

■ SL-M1400N ★





Top/Backside

Material PVC/PET

Color Green/White

Profile Smooth and matte/Impregnated

■ SL-M1403N




Top/Backside

Material PVC/PET

Color Green/White

Profile Smooth and matte/Impregnated

■ SL-SY458



Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and glossy/Impregnated

■ SL-S6404



Top/Backside

Material PU/PET

Color Green/White

Profile Grainy(N)/Impregnated

PU : Polyurethane PET : Polyester PVC : Polyvinyl chloride

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Unpackaged food	Non-fray	5 deg incline	Low noise	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough								
[11] Excellent belt flexibility, applicable for small pulleys or knife edges, suitable for small and mini conveyors																	
SL-M4100★	1	0.9	0.8	15/R3	25/R8	30	○	○	×	0.3	0.1	○	—	—	○	600	4MUWE HO
SL-M4300★	1	0.9	0.8	15/R3	25/R8	30	○	○	×	0.3	0.1	○	—	—	○	600	4MUGE HO

Incline conveyor belts

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.

[12] Inclined conveyance using surface juts and surface friction resistance magnitude.

SL-M9400N★	2	5.1	5.1	—	50	50	○	○	△	0.7	0.1	—	—	○	—	2930	8CGE P20
SL-M9409N	2	3.5	3.2	50	—	50	○	○	△	0.7	0.1	—	—	○	○	3000	8MCGE R10
SL-S6100	1	1.0	0.9	25	25	30	○	○	×	1.7	0.15	○	○	○	—	600	
SL-S6400	2	1.6	1.5	25	30	35	○	○	△	1.7	0.15	○	○	○	—	1800	
SL-S6437N	2	3.4	3.3	—	50	50	○	○	△	0.7	0.1	—	—	○	○	1800	8MCSG10E R40
SL-M0400N	2	2.6	2.6	45	50	55	○	○	△	0.5	0.15	○	—	○	—	1800	8UGE P1S
SL-M2406	2	1.8	1.7	35	40	40	○	○	△	0.3	0.15	○	—	○	—	1800	8UGE N3S
SL-M2309	1	1.6	1.5	30	30	35	○	○	×	1.7	0.15	○	—	○	—	600	4DUGE R1S

○ : Suitable (functional) △ : May be suitable. Please contact Bando or your distributor. × : Not suitable — : Not functional

SL-M4100 ★




Top/Backside

Material PU/PET

Color White/White

Profile Smooth and glossy/Fabric surface

SL-M4300 ★




Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and glossy/Fabric surface

SL-M9400N ★



Top/Backside

Material PVC/PET

Color Green/White

Profile Grainy(P2)/Fabric surface

SL-M9409N



Top/Backside

Material PVC/PET

Color Green/White

Profile Grooved(R1)/Fabric surface

SL-S6100



Top/Backside

Material PU/PET

Color White/White

Profile Smooth and matte/Impregnated

SL-S6400




Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and matte/Impregnated

SL-S6437N




Top/Backside

Material PVC/PET

Color Green/White

Profile Special (R4)/Fabric surface

SL-M0400N




Top/Backside

Material PU/PET

Color Green/White

Profile Grainy(P1)/Impregnated

SL-M2406




Top/Backside

Material PU/PET

Color Green/White

Profile Grainy(N3)/Impregnated

SL-M2309



Top/Backside

Material PU/PET

Color Green/White

Profile Grooved(R1)/Impregnated

PU : Polyurethane PET : Polyester PVC : Polyvinyl chloride

M·S Series Belts for Logistics and General Conveyance / Specialty Applications

Incline conveyor belts

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.













Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Unpackaged food	Non-fray	5 deg incline	Low noise	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough								
[13] Excellent durability in inclined conveyance contributes to long belt life																	
SL-MC300★	1	1.9	2.0	20	—	—	○	○	×	0.9	0.1	—	—	○	○	600	4MIGE R80 Mr. Climber
SL-MC400★	2	3.0	3.0	60	60	—	○	○	△	0.9	0.1	—	—	○	○	1800	8MIGE R80 Mr. Climber

Belts for slide applications

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.

[14] Easy-slide surface specification, suitable for side sorting and alignment applications																	
SL-M5100	1	0.5	0.5	25/R3	30/R5	35	○	○	×	0.15	0.15	○	—	—	—	600	4PE SS
SL-M5200N★	2	1.1	1.1	25/R8	30/R10	40	○	○	△	0.15	0.1	○	—	—	○	1800	8PE SO
SL-M5201N	2	1.0	1.0	25/R5	30/R10	—	○	○	△	0.15	0.15	○	○	—	—	1800	5PE SS
SL-M5302	1	0.5	0.5	25/R3	30/R5	35	○	○	×	0.15	0.15	○	—	—	—	600	4PGE SS
SL-M5402N★	2	1.1	1.1	25/R8	30/R10	40	○	○	△	0.15	0.1	○	—	—	○	1800	8PGE SO
SL-M5422	2	1.2	1.2	25/R5	30/R10	35	○	○	△	0.15	0.15	○	—	—	—	1800	5PGE SS
SL-M8418★	2	1.8	1.6	50	50	55	○	○	△	0.2	0.1	○	—	—	○	1800	8MGUG5E FO
SL-S6235N	2	1.4	1.4	25	30	—	○	○	△	0.15	0.15	○	○	—	—	1800	8PE NF SS
SL-S6933N★	2	1.5	1.4	30/R10	35	—	○	○	△	0.2	0.15	○	○	—	—	1800	5GUGRE FS
SL-SY040★	1	1.0	0.9	25/R5	30	35	○	○	×	0.2	0.15	○	—	—	—	600	4DGUGRE FS

○: Suitable (functional) △: May be suitable. Please contact Bando or your distributor. ×: Not suitable —: Not functional

<p>■ SL-MC300 ★</p>  <p>Top/Backside</p> <p>Material Special rubber/PET Color Green/White Profile Special (R8)/Fabric surface</p>	<p>■ SL-MC400 ★</p>  <p>Top/Backside</p> <p>Material Special rubber/PET Color Green/White Profile Special (R8)/Fabric surface</p>	<p>■ SL-M5100</p>  <p>Top/Backside</p> <p>Material PET/PET Color White/White Profile Impregnated/Impregnated</p>	<p>■ SL-M5200N ★</p>  <p>Top/Backside</p> <p>Material PET/PET Color White/White Profile Impregnated/Fabric surface</p>	<p>■ SL-M5201N</p>  <p>Top/Backside</p> <p>Material PET/PET Color White/White Profile Impregnated/Impregnated</p>	<p>■ SL-M5302</p>  <p>Top/Backside</p> <p>Material PET/PET Color Green/Green Profile Impregnated/Impregnated</p>
<p>■ SL-M5402N ★</p>  <p>Top/Backside</p> <p>Material PET/PET Color Green/White Profile Impregnated/Fabric surface</p>	<p>■ SL-M5422</p>  <p>Top/Backside</p> <p>Material PET/PET Color Green/White Profile Impregnated/Impregnated</p>	<p>■ SL-M8418 ★</p>  <p>Top/Backside</p> <p>Material PU/PET Color Green/White Profile Smooth and matte/Fabric surface</p>	<p>■ SL-S6235N</p>  <p>Top/Backside</p> <p>Material PET/PET Color White/White Profile Impregnated/Impregnated</p>	<p>■ SL-S6933N ★</p>  <p>Top/Backside</p> <p>Material PU/PET Color Gray/White Profile Smooth and matte/Impregnated</p>	<p>■ SL-SY040 ★</p>  <p>Top/Backside</p> <p>Material PU/PET Color Gray/White Profile Smooth and matte/Impregnated</p>












PU: Polyurethane PET: Polyester

Specialty Belts

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Unpackaged food	Non-fray	5 deg incline	Continuous use with dry heat (°C)	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough								
[15] Belts with excellent heat resistance, suitable for conveyance of kneaded rubber, metal, plastics																	
SL-S1235	2	6.0	9.0	—	100	—	○	○	△	0.4	0.15	—	—	○	-10~250	1200	8AUCF8E 0S
SL-S1239	2	1.8	1.6	—	75	—	○	○	△	1.7	0.25	○	—	○	-40~180	1200	5SWE KS
SL-S1831	2	2.2	2.0	—	50	—	○	○	△	0.15	0.15	—	—	—	-20~150	1200	8EE SS
SL-S1832	2	1.8	1.7	—	50	—	○	○	△	0.5	0.15	—	—	○	-20~150	1200	8EBKE FS
SL-S1833	2	2.2	2.1	—	50	—	×	○	△	0.5	0.5	—	—	○	-20~150	1200	8EBK4/ BK4E FN
SL-S1933	2	2.6	2.4	—	100	—	○	○	△	0.1	0.15	○	—	—	-20~150	1200	8FGRE TS
[16] Belts for low temperature conveyance, suitable for frozen food, ice cream and other cold products																	
SL-F1201★	2	1.3	1.1	10/R2	15/R3	25	○	○	△	0.3	0.15	○	○	—	-40~80	1800	
SL-F1218★	2	1.3	1.1	15/R3	20/R5	25	○	○	△	0.3	0.15	○	○	—	-40~80	1800	
SL-F1502	1	0.9	0.8	15/R3	20/R5	25	○	○	×	0.25	0.15	○	○	—	-40~80	600	Mr. Cook the blue
SL-F1601N	2	1.3	1.1	15/R3	20/R5	25	○	○	△	0.3	0.15	○	○	—	-40~80	1800	Mr. Cook the blue
SL-F1611	2	1.5	1.3	25/R8	30/R10	40	×	○	△	0.3	0.3	○	○	—	-40~80	1800	Mr. Cook the blue

○ : Suitable (functional) △ : May be suitable. Please contact Bando or your distributor. × : Not suitable — : Not functional

<p>■ SL-S1235</p>  <p>Top/Backside</p> <p>Material Felt/PET</p> <p>Color White/White</p> <p>Profile Felt/Impregnated</p>	<p>■ SL-S1239</p>  <p>Top/Backside</p> <p>Material Silicon/PET</p> <p>Color White/White</p> <p>Profile Mirror type/Impregnated</p>	<p>■ SL-S1831</p>  <p>Top/Backside</p> <p>Material PET/PET</p> <p>Color Black/Black</p> <p>Profile Impregnated/Impregnated</p>	<p>■ SL-S1832</p>  <p>Top/Backside</p> <p>Material Heat resistant rubber/PET</p> <p>Color Black/Black</p> <p>Profile Smooth and matte/Impregnated</p>	<p>■ SL-S1833</p>  <p>Top/Backside</p> <p>Material Heat resistant rubber/Heat resistant rubber</p> <p>Color Black/Black</p> <p>Profile Smooth and matte/Grainy(N)</p>	<p>■ SL-S1933</p>  <p>Top/Backside</p> <p>Material Fluorine resin/PET</p> <p>Color Gray/Black</p> <p>Profile Film/Impregnated</p>
<p>■ SL-F1201 ★</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-F1218 ★</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-F1502</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color Blue/White</p> <p>Profile Smooth and matte/Impregnated</p>	<p>■ SL-F1601N</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color Blue/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-F1611</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color Blue/Blue</p> <p>Profile Smooth and glossy/Grainy(N)</p>	

PU : Polyurethane PET : Polyester

S Series Belts for Specialty Applications

Specialty Belts

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Unpackaged food	Non-fray	5 deg incline	Ultra anti-static	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough								
[17] Excellent oil resistance, such as to machine oil																	
SL-S2632	2	3.6	3.3	75	75	—	○	○	△	0.5	0.15	—	—	○	—	1800	8RDB20E HS
SL-S2634	2	2.1	1.9	50	50	—	○	○	△	0.5	0.15	—	—	○	—	1800	8RDB5E HS
SL-SY533	1	1.9	1.7	30	30	—	×	○	×	0.5	0.5	—	—	○	—	600	4RDB5/5E N3N
SL-SY534	1	1.1	1.0	25	25	—	○	○	×	0.4	0.15	—	—	○	—	600	4RDB5E HS
[18] Belts for heavy object conveyance, such as iron plates and lumber, with excellent resistance to impact and piercing																	
SL-S5425 ★	2	2.1	1.9	60	60	70	○	○	△	0.3	0.15	○	—	—	—	1800	16AUGE HS
SL-SY035	3	2.9	2.8	100	100	125	○	○	×	0.3	0.15	○	—	—	—	1800	12UG5E HS
[19] Belts suitable for conveyance of items easily affected by static electricity, such as paper, fiber or electrical components																	
SL-S3726	1	1.0	0.9	25/R8	30/R10	35	○	○	×	0.3	0.15	○	○	—	○	600	
SL-S3827	2	1.5	1.4	35	40	45	○	○	△	0.25	0.15	○	—	—	○	2500	8HUBKE FS

○: Suitable (functional) △: May be suitable. Please contact Bando or your distributor. ×: Not suitable —: Not functional

■ SL-S2632



Top/Backside

Material PVC/PET

Color Dark blue/White

Profile Smooth and glossy/Impregnated

■ SL-S2634




Top/Backside

Material PVC/PET

Color Dark blue/White

Profile Smooth and glossy/Impregnated

■ SL-SY533



Top/Backside

Material PVC/PVC

Color Dark blue/Dark blue

Profile Grainy(N3)/Grainy(N)

■ SL-SY534



Top/Backside

Material PVC/PET

Color Dark blue/White

Profile Smooth and glossy/Impregnated

■ SL-S5425 ★



Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and glossy/Impregnated

■ SL-SY035




Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and glossy/Impregnated

■ SL-S3726



Top/Backside

Material PU/PET

Color Black/White

Profile Smooth and glossy/Impregnated

■ SL-S3827



Top/Backside

Material PU/PET

Color Black/White

Profile Smooth and matte/Impregnated

PU: Polyurethane PET: Polyester PVC: Polyvinyl chloride

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Unpackaged food	Non-fray	Antibacterial Antifungal	5 deg incline	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough								
[20] Flexible in width direction, suitable for trough or curved conveyors																	
SL-S7100	1	0.9	0.8	25/R5	30	35	○	○	○	0.25	0.15	○	○	○	—	600	※1
SL-S7200	2	1.5	1.4	35	40	45	○	○	○	0.25	0.15	○	○	○	—	1800	※1
SL-S7300	1	0.9	0.8	25/R5	30	35	○	○	○	0.25	0.15	○	—	—	—	600	
SL-S7400	2	1.5	1.4	35	40	45	○	○	○	0.25	0.15	○	—	—	—	1800	
[21] Low noise belts, suitable for use at airports and logistics centers																	
SL-M0409★	2	2.2	2.1	50	50	55	○	○	△	1.7	0.1	○	—	—	○	1800	8MUGE R10
SL-M4100	1	0.9	0.8	15/R3	25/R8	30	○	○	×	0.3	0.1	○	—	—	—	600	4MUWE H0
SL-M6423	2	1.5	1.4	35	40	40	○	○	△	0.3	0.1	○	—	—	—	1800	8MUGE H0
SL-M9409N	2	3.5	3.2	50	—	50	○	○	△	0.7	0.1	—	—	—	○	3000	8MCGE R10
SL-SY455N	2	2.2	2.0	50	50	50	○	○	△	0.4	0.1	—	—	—	○	3000	8MCGE H0

○: Suitable (functional) △: May be suitable. Please contact Bando or your distributor. ×: Not suitable —: Not functional

※1 Not suitable for curved conveyors as cleat process adhesion is low

■ SL-S7100



Top/Backside

Material PU/PET

Color White/White

Profile Smooth and matte/Impregnated

■ SL-S7200



Top/Backside

Material PU/PET

Color White/White

Profile Smooth and matte/Impregnated

■ SL-S7300



Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and matte/Impregnated

■ SL-S7400



Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and matte/Impregnated

■ SL-M0409 ★



Top/Backside

Material PU/PET

Color Green/White

Profile Grooved(R1)/Fabric surface

■ SL-M4100



Top/Backside

Material PU/PET

Color White/White

Profile Smooth and glossy/Fabric surface

■ SL-M6423



Top/Backside

Material PU/PET

Color Green/White

Profile Smooth and glossy/Fabric surface

■ SL-M9409N



Top/Backside

Material PVC/PET

Color Green/White

Profile Grooved(R1)/Fabric surface

■ SL-SY455N



Top/Backside

Material PVC/PET

Color Green/White

Profile Smooth and glossy/Fabric surface

PU: Polyurethane PET: Polyester PVC: Polyvinyl chloride












S Series Belts for Specialty Applications

Specialty Belts

★ Indicates standard stock. Please contact Bando or your distributor for non-standard belt widths or lengths or for belts without a ★ indication.

Product	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Unpackaged food	Non-fray	5 deg incline	Continuous use with dry heat (°C)	Maximum applicable width (mm)	Previous product, remarks
				Finger	Hot lap	Cold lap	Table	Roller	Trough								
[22] Belts with non-sticky covers impregnated with heat resistant rubber, or made using silicon or felt.																	
SL-S1239	2	1.8	1.6	—	75	—	○	○	△	1.7	0.25	○	—	○	-40~180	1200	5SWE KS
SL-S1831	2	2.2	2.0	—	50	—	○	○	△	0.15	0.15	—	—	—	-20~150	1200	8EE SS
SL-S8231N	2	2.4	2.4	50	50	55	○	○	△	0.25	0.15	○	—	—	-10~80	1800	4PCE OO
SL-SY137N	1	2.2	2.7	—	40	40	○	○	×	0.4	0.15	○	—	—	-10~80	600	4DUMFE OS
[23] Belts resistant to mold propagation, meeting food sanitation needs																	
SL-S9200	2	2.3	2.1	60	60	60	○	○	△	0.5	0.15	○	○	○	5~60	1800	
SL-S9235	2	2.6	2.4	80	80	80	×	○	△	0.4	0.4	○	○	○	5~60	1800	8CW5/W5JE FF
SL-SY292★	2	3.2	2.9	100	100	100	×	○	○	0.4	0.5	○	○	○	5~60	1800	8YCW FN
[24] Belts suitable for metal detectors, and visual or electronic scan detection devices																	
SL-SY045	2	1.4	1.3	35	40	—	○	○	△	0.25	0.25	○	○	—	-10~80	1200	5UTOMEI FF
SL-M4100	1	0.9	0.8	15/R3	25/R8	30	○	○	×	0.3	0.1	○	—	—	-10~80	600	4MUWE HO
SL-M4300	1	0.9	0.8	15/R3	25/R8	30	○	○	×	0.3	0.1	○	—	—	-10~80	600	4MUGE HO
[25] Belts suitable for cutting of conveyed items on the belt surface																	
SL-SY245	2	4.4	4.0	—	150	150	○	○	△	1.7	0.3	○	○	○	-10~80	1800	8USW15/W12E FN

○: Suitable (functional) △: May be suitable. Please contact Bando or your distributor. ×: Not suitable —: Not functional

<p>■ SL-S1239</p>  <p>Top/Backside</p> <p>Material Silicon/PET</p> <p>Color White/White</p> <p>Profile Mirror type/Impregnated</p>	<p>■ SL-S1831</p>  <p>Top/Backside</p> <p>Material PET/PET</p> <p>Color Black/Black</p> <p>Profile Impregnated/Impregnated</p>	<p>■ SL-S8231N</p>  <p>Top/Backside</p> <p>Material Cotton/PET</p> <p>Color White/White</p> <p>Profile Cotton fabric/Impregnated</p>	<p>■ SL-SY137N</p>  <p>Top/Backside</p> <p>Material Felt/PET</p> <p>Color White/White</p> <p>Profile Felt/Impregnated</p>	<p>■ SL-S9200</p>  <p>Top/Backside</p> <p>Material PVC/PET</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Impregnated</p>	<p>■ SL-S9235</p>  <p>Top/Backside</p> <p>Material PVC/PVC</p> <p>Color White/White</p> <p>Profile Smooth and matte/Smooth and matte</p>
<p>■ SL-SY292★</p>  <p>Top/Backside</p> <p>Material PVC/PVC</p> <p>Color White/White</p> <p>Profile Smooth and matte/Grainy(N)</p>	<p>■ SL-SY045</p>  <p>Top/Backside</p> <p>Material PU/PU</p> <p>Color Transparent/Transparent</p> <p>Profile Smooth and matte/Smooth and matte</p>	<p>■ SL-M4100</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color White/White</p> <p>Profile Smooth and glossy/Fabric surface</p>	<p>■ SL-M4300</p>  <p>Top/Backside</p> <p>Material PU/PET</p> <p>Color Green/White</p> <p>Profile Smooth and glossy/Fabric surface</p>	<p>■ SL-SY245</p>  <p>Top/Backside</p> <p>Material PU/PU</p> <p>Color White/White</p> <p>Profile Smooth and matte/Grainy(N)</p>	

PU: Polyurethane PET: Polyester PVC: Polyvinyl chloride

F Series for Food Conveyance Applications

■ Non-fray specification

Suppresses belt edge fraying without additional processing, and reduces the risk of foreign matter inclusion.

<Edge damage comparison> (after 7months on in-house tester)



Non-fray specification

Standard specification

■ Antibacterial, antifungal

Contributes to belt sanitation by restraining bacterial reproduction and mold generation

<Antibacterial performance>

Test sample: Coliform bacteria

Viable cell count immediately after inoculation: 250,000

After 24 hours at 35°C: 10 or less

<Antifungal performance>

Antifungal test in compliance with JIS Z2911 (5 types of fungi)

After 28 days from cultivation: up to 25% less cultivation overall

<Anti bacteria test>



Pre-test

Antibacterial and antifungal specifications

Standard belts

■ Notes

• Unpackaged food conveyance

A "O" in the tables for F, M and S Series indicates that the belts meet Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare. Please do not use other belts for unpackaged food other than those marked "O." Other belts may be used to convey foods packaged in boxes, trays, etc.

• Antibacterial, antifungal

These belts suppress the growth of bacteria or fungi, but they do not sterilize or disinfect. Bacterial residue on belt surfaces may foster their generation, even using antibacterial and antifungal specifications.

• Use at low temperature

Please select the finger joint or hot joint specification when belt surface temperature is -10~0°C during use (not cold joint). Choose finger joints for surface temperatures of -40~-10°C; hot and cold joints are not applicable.

• Trough specification

Select hot joints for trough conveyors. Finger joints and cold joints are not applicable.

M Series for Logistics and General Purpose Conveyance

■ Inclined conveyance

Belts with coarse or friction-resistant surfaces are available for inclined conveyance without cleats. Normally, belts with higher friction coefficients can convey at higher angles, but exposure to dust, dirt and moisture may lower performance. SL-MC300 and SL-MC400 ("Mr. Climber" belts) have a high friction coefficient and are resistant to dirt.

■ Low noise capability

The low noise specification uses a softened belt backside to reduce the abrasive sound generated when the belt touches the belt support, such as an iron plate. The effect is normally about 5db, but this depends on the conveyor, the operating environment and peripheral equipment. Please consider these factors, and consult with Bando or your distributor for effectiveness in a specific application.

S Series for Specialty Conveyance

■ Heat resistance


Belt surface temperature is the basis for determining heat resistance temperatures. The belt surface temperature is usually lower than the material being conveyed, so belts may be used even if the material temperature exceeds the temperature range for the belt. If ambient temperatures are high, the belt surface temperature should conform to the ambient temperature.

■ Antifungal PVC for food

Bando offers belts with PVC covers that meet Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare. The properties of these PVC-covered belts are suitable where antifungal performance is required, as mold is less likely to occur.

P Series Super SUNLINE Belts

Structure

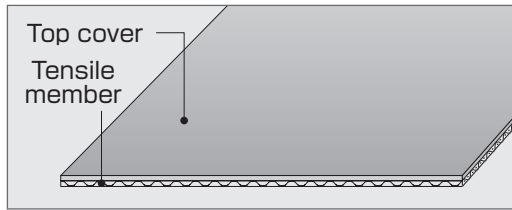

Features

- Seamless
- Applicable for unpackaged food conveyance
- Built-to-Order sizes available
- Humidity and heat resistance, non-sticky specifications
- Non-fray specification available

How to Read Specifications

SL- P1 1 0 5

① ② ③

① Type :

P1...Urethane P2...PVC
 P3...Humidity and heat resistant urethane
 P4...Ultra anti-static
 P5...Silicon impregnated
 P6...Slide P7...Polyester
 P8...Antibacterial, antifungal urethane

② Fabric :

1...Lateral rigidity 2...Non-fray 3...Flexible

③ Belt color · Top cover thickness · Form :

01...Blue · 0.5mm · Smooth/Fabric	12...White · 0mm · Impregnated/Impregnated
02...Blue · 0.5mm · Smooth/Impregnated	14...Black · 0.2mm · Impregnated/Fabric
04...Gray · 0.2mm · Smooth/Impregnated	16...Green · 0.1mm · Smooth/Fabric
05...Green · 0.2mm · Smooth/Impregnated	18...Green · 0.2mm · Smooth/Smooth
06...White · 0.2mm · Smooth/Impregnated	23...Black · 0.2mm · Smooth/Impregnated
08...White · 0.2mm · Smooth/Smooth	32...White · 0.5mm · Smooth/Impregnated
11...White · 0.2mm · Smooth/Fabric	

Main Applications

- P1 Series** : Sweets, bread, snacks, ham, sausage
P2 Series : Paper, fiber, metal chips
P3 Series : Fish cakes, frozen food
P4 Series : IC, LSI, printed circuit boards, electronic components
P5 Series : Sweets, bread, prepared foods, non-sticky material
P7 Series : Sweets, bread, dairy products
P8 Series : Sweets, bread, dairy products

Dimensional tolerance

	Belt dimensions (mm)	Allowance (mm)
Belt inner circumference	400~1000	±2 (Non-fray ±3) ±5
	1001~5000	
Belt inner circumference lateral difference	400~5000	1
Belt width	100以下	±1
	101以上	±2
Belt thickness	0.5~1.0	±0.15


Pulleys

• Crown pulleys

(Unit : mm)

B	100 or less	101~300	301~650
H	0.2	0.3	0.4

- ※ Use crown pulleys for the drive, head and tail pulleys.
- ※ Use crown pulleys for each belt in multiple belt applications.
- ※ The crown should be the entire pulley width R.



• Pulley diameter

Belt width (mm)	Pulley diameter (common to all)	Belt internal circumference (mm)
Less than 100	20 φ	1000 or less
100~400	50 φ	1001~5000
401~650	75 φ	1001~5000

- ※ Select the pulley diameter in the table above by belt width and inner circumference. The large pulley should be the "minimum drive pulley diameter" and small pulley should be "minimum pulley diameter".
 Example: Belt width 90mm, Belt length 1500mm
 For belt width: 20φ minimum pulley diameter
 For belt length: 50φ drive pulley diameter
- ※ For knife edge applications, select 1 rank larger diameter for the minimum drive pulley diameter
- ※ The winding angle of the drive pulley diameter should be 180° or more.
- ※ If the pulley gets wet or it is used in temperatures of 0°C or less, use pulley lagging on the drive pulley surface to avoid slipping.

Manufacturing range

Belt inner circumference (mm)	Belt width (mm)
400~5000 ※1	10~650
100mm intervals	1mm intervals

- ※1 The inner circumference is 700~5000mm for belts with covers on both surfaces.
- ※ Please contact Bando or your distributor if you would like us to manufacture non-standard belt sizes.
- ※ Please tell us when ordering if it is a multi-belt application.
- ※ SL-P8111 : Max width is 400mm

Minimum order lot

Please order at least the minimum lot as shown below.

Belt width (mm)	Minimum lot (pcs)	Belt width (mm)	Minimum lot (pcs)	Belt width (mm)	Minimum lot (pcs)
10	60	41~60	10	111~130	5
11~15	40	61~70	9	131~160	4
16~20	30	71~80	8	161~220	3
21~30	20	81~90	6	221~330	2
31~40	15	91~110	6	331~650	1

Products

Belt	No. of plies	Total thickness (mm)	Top cover			Backside		Minimum pulley diameter (mm)	Belt support		Friction coefficient		Anti-static	Unpack- aged food	Non- fray	Slide	Low noise	Reference (previous product name)
			Material	Color	Form	Material	Form		Table	Roller	Top surface	Backside surface						
[P1] Meets Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare, suitable for general food conveyance, such as sweets, bread, snack food, etc. ※ Continuous use temperature range (belt surface temperature) -10 ~ 80°C																		
SL-P1105	1	0.8	PU	Green	Smooth (matte)	PET	Impregnated	4 (R2)	○	○	0.2	0.15	○	○	-	-	-	SP-EUGFS
SL-P1106	1	0.8	PU	White	Smooth (matte)	PET	Impregnated	4 (R2)	○	○	0.2	0.15	○	○	-	-	-	SP-EUWFS
SL-P1108	1	1.0	PU	White	Smooth (matte)	PU	Smooth (matte)	10	△	○	0.2	0.2	○	○	○	-	-	SP-EUW2/W2FF
SL-P1118	1	1.0	PU	Green	Smooth (matte)	PU	Smooth (matte)	10	△	○	0.2	0.2	○	○	○	-	-	SP-EUG2/G2FF
SL-P1132	1	0.9	PU	White	Smooth (matte)	PET	Impregnated	4 (R2)	○	○	0.2	0.15	○	○	-	-	-	SP-EUW5FS
SL-P1206	1	0.9	PU	White	Smooth (matte)	PET	Impregnated	4 (R2)	○	○	0.2	0.15	-	○	◎	-	-	New product
SL-P1311	1	0.7	PU	White	Smooth (matte)	PET	Fabric	4 (R2)	○	○	0.2	0.15	○	○	-	-	○	SP-EMUWFO
SL-P1310	1	0.7	PU	Green	Smooth (matte)	PET	Fabric	4 (R2)	○	○	0.2	0.15	○	○	-	-	○	SP-EMUGFO
SL-P1318	1	1.0	PU	Green	Smooth (matte)	PU	Smooth (matte)	10	△	○	0.2	0.2	○	○	○	-	-	SP-EMUG2/G2FF
[P2] General purpose food conveyance, except unpackaged food, with a PVC cover. ※ Continuous use temperature range (belt surface temperature) +5 ~ 60°C																		
SL-P2102	1	1.0	PVC	Blue	Smooth (matte)	PET	Impregnated	4 (R2)	◎	○	0.3	0.15	○	×	-	-	-	SP-ECBFS
SL-P2301	1	0.9	PVC	Blue	Smooth (matte)	PET	Fabric	4 (R2)	◎	○	0.3	0.15	○	×	-	-	○	SP-EMCBFO
[P3] High resistance to humidity and heat, and meets Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare, suitable for the conveyance of kneaded goods, frozen foods, processed meats and steamed products. ※ Continuous use temperature range (belt surface temperature) -10 ~ 80°C																		
SL-P3105	1	0.8	PU	Green	Smooth (matte)	PET	Impregnated	4 (R2)	◎	○	0.2	0.15	○	○	-	-	-	SP-EKAGFS
SL-P3106	1	0.8	PU	White	Smooth (matte)	PET	Impregnated	4 (R2)	◎	○	0.2	0.15	○	○	-	-	-	SP-EKAWFS
SL-P3206	1	0.9	PU	White	Smooth (matte)	PET	Impregnated	4 (R2)	◎	○	0.2	0.15	-	○	◎	-	-	New product
SL-P3311	1	0.7	PU	White	Smooth (matte)	PET	Fabric	4 (R2)	◎	○	0.2	0.15	○	○	-	-	○	SP-EMKAWFO
[P4] Ultra anti-static specification, ideal for process conveyance of electronic components sensitive to static, IC boards, etc. ※ Continuous use temperature range (belt surface temperature) -10 ~ 80°C																		
SL-P4123	1	0.8	PU	Black	Smooth (glossy)	PET	Impregnated	4 (R2)	◎	○	0.2	0.15	◎	×	×	-	-	SP-EUBKFS
SL-P4314	1	0.7	PU	Black	Smooth (glossy)	PET	Fabric	4 (R2)	◎	○	0.2	0.15	◎	×	×	-	○	SP-EMUBKFO
[P5] Low friction coefficient, ideal for conveyance of sticky materials. Meets Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare. ※ Continuous use temperature range (belt surface temperature) -10 ~ 80°C																		
SL-P5112	1	0.5	SPET	White	Impregnated	PET	Impregnated	4 (R2)	◎	○	0.15	0.15	○	○	×	○	-	SP-EPSS
SL-P5212	1	0.6	SPET	White	Impregnated	PET	Impregnated	4 (R2)	◎	○	0.15	0.15	-	○	◎	○	-	New product
SL-P5312	1	0.4	SPET	White	Impregnated	PET	Impregnated	4 (R2)	◎	○	0.15	0.15	○	○	×	○	-	SP-EMPS SS
[P6] Ideal belt for alignment, sorting and accumulation applications ※ Continuous use temperature range (belt surface temperature) -10 ~ 80°C																		
SL-P6104	1	0.8	Rigid PU	Gray	Smooth (matte)	PET	Impregnated	4 (R2)	○	○	0.15	0.15	○	○	×	◎	-	SP-EGUGRFS
SL-P6304	1	0.7	Rigid PU	Gray	Smooth (matte)	PET	Impregnated	4 (R2)	○	○	0.15	0.15	○	○	×	◎	-	SP-EMGUGRFS
[P7] Belts use polyurethane-impregnated fabric, suitable for slide applications. ※ Continuous use temperature range (belt surface temperature) -10 ~ 80°C																		
SL-P7112	1	0.5	PET	White	Impregnated	PET	Impregnated	4 (R2)	◎	○	0.15	0.15	○	○	×	○	-	SP-EPSS
SL-P7212	1	0.5	PET	White	Impregnated	PET	Impregnated	4 (R2)	◎	○	0.15	0.15	-	○	◎	○	-	New product
SL-P7312	1	0.4	PET	White	Impregnated	PET	Impregnated	4 (R2)	◎	○	0.15	0.15	○	○	×	○	-	SP-EMPS
[P8] Antibacterial and antifungal polyurethane belts ※ Continuous use temperature range (belt surface temperature) -10 ~ 80°C																		
SL-P8111	1	0.7	PU	White	Smooth (matte)	PET	Impregnated	4 (R2)	○	○	0.2	0.15	○	○	×	◎	○	SP-EUBWFO

◎: Ideal ○: Suitable (functional) △: May be suitable. Please contact Bando or your distributor. ×: Not suitable -: Not functional
 PU: Polyurethane PET: Polyester SPET: Silicon impregnated fabric PVC: Polyvinyl chloride

For unpackaged food conveyance


○: Meets Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare (excluding cotton fabric and wool felt).

×: Do not use for unpackaged food, but may be used to convey food packed in bags, boxes or trays

SUNLINE Steep Incline Conveyor Belts

SUNLINE Belts are used for steep incline conveyance with a combination of cleats and sidewalls on the belt body. Vertical conveyance of bulk materials and powders is also possible in narrow-space installations.

Belt structure

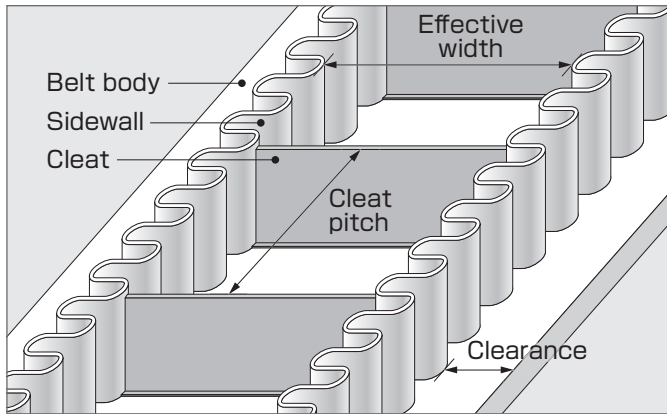

Features

- Steep incline conveyance
- Contributes to minimizing conveyor system size
- The same belt can be used on a line with different angles
- Little spillage
- Use in various applications and amounts of materials conveyed

Main Applications

- Steep incline conveyance of food, especially powder or bulk
- Steep incline conveyance of raw materials, components
- Withdrawing applications from hoppers, etc.

How to Read Specifications

[Example]

<Belt> **SL- S7233**

①
400(mm) × 12500(mm)
② ③

① Belt ② Width ③ Length

<Effective width> 190(mm) Effective width dimensions

<Clearance> 60(mm) Clearance dimensions

<Sidewall> **WA- 60 U (W)**

① ② ③ ④

<Cleat> **TC- 50 U (W)** pitch 200(mm)
① ② ③ ④ ⑤

① Type : [Sidewall]WA WB WC [Cleat]TC ② Height(mm)

③ Material : U...PU C...PVC


④ Color : W...White G...Green ⑤ Installation pitch(mm)

Belt Products

Belt	No. of plies	Weight (kg/m ²)	Total thickness (mm)	Minimum pulley diameter (mm)/ Knife edge			Belt support			Top friction coefficient	Backside friction coefficient	Unpackaged food	Notes, previous product name
				Finger	Hot lap	Cold lap	Table	Roller	Trough				
SL-S7233	2	1.9	1.7	55	60	65	○	○	×	0.3	0.2	○	8DUWE HS
SL-S7432	2	1.9	1.7	55	60	65	○	○	×	0.3	0.2	○	8DUGE HS
SL-S7211	2	2.8	2.6	75	75	75	×	○	×	0.5	0.5	×	8DCW5/W5E HN
SL-S7411	2	2.8	2.6	75	75	75	×	○	×	0.5	0.5	×	8DCG5/G5E HN


○ : Suitable (functional) × : Not suitable

■ SL-S7233



Top/Backside
Material PU/PET
Color White/White
Profile Smooth and glossy/Impregnated

■ SL-S7432




Top/Backside
Material PU/PET
Color Green/White
Profile Smooth and glossy/Impregnated

■ SL-S7211



Top/Backside
Material PVC/PVC
Color White/White
Profile Smooth and glossy/Grainy(N)

■ SL-S7411



Top/Backside
Material PVC/PVC
Color Green/Green
Profile Smooth and glossy/Grainy(N)

PU : Polyurethane PET : Polyester PVC : Polyvinyl chloride

For unpackaged food conveyance

○ : Meets Article 370 standards of the Food Sanitation Act of the Ministry of Health and Welfare.

× : Do not use for unpackaged food, but may be used to convey food packed in bags, boxes or trays

Sidewall Standard Specifications

Type	Shape	Name	Color	P Sidewall pitch (mm)	W Sidewall width (mm)	Height (mm)	Minimum pulley diameter (mm)
WA		WA-40U (G) Green	50	45	40	100	
		(W) White					
		WA-60U (G) Green					
		(W) White					
		WA-80U (G) Green					
		(W) White					
WB	WB-30U (G) Green	(W) White	33	30	30	75	
		WC-40U (G) Green	(W) White	45	55	40	80
			WC-60U (G) Green			(W) White	60

Cleat Standard Specifications

Type	Shape	Name	Color	H Height (mm)	W Width (mm)	Weight (kg/m)	Unpackaged food
TC		SL-TC30U (G) Green	30	25	0.21	○	
		(W) White					
		SL-TC50U (G) Green					
		(W) White					
		SL-TC70U (G) Green					
		(W) White					
		SL-TC30C (G) Green					30
(W) White							
SL-TC50C (G) Green	50	33	0.63	×			
(W) White							
SL-TC70C (G) Green	70	40	1.20	×			
(W) White							

○ : Suitable (functional) × : Not suitable

- * The gap tolerance in the sidewall and cleat dimension is 0~4mm
- * Standard cleat pitch: 150mm, 300mm, 400mm, 500mm
(Other cleat pitches can be manufactured in intervals of 100~1000mm)
- * If required sidewall height is not standard, please contact us.
- * We can manufacture 5mm and at 10mm intervals from 10mm to 100mm for free zone R. Variable angle line R dimension should be calculated by $R \geq 0.1 \times (B+H)$. Round up for less than 10mm.
- * Manufacturing dimensions: Maximum belt width B is 1000mm, maximum effective width in variable line is 700mm, straight line is 800mm, maximum length is 600mm. Please contact Bando or your distributor if you require other specifications.

Standard combinations


Type	Shape	B (mm)	H (mm)	H ₁ (mm)	NB (mm)	R (mm)
Variable angle line		200	—	—	—	—
		250	—	—	—	—
		300	40	30	110	50
			60	50		
		350	40	30	160	50
			60	50		
		400	40	30	190	60
			60	50		
		450	40	30	240	60
			60	50		
		500	40	30	270	70
			60	50		
		600	40	30	370	70
			60	50		
		800	40	30	530	90
			60	50		
		1000	40	30	690	110
			60	50		
Straight line		200	40	30	100	5
		60	50			
		250	40	30	150	5
			60	50		
		300	40	30	200	5
			60	50		
		350	40	30	250	5
			60	50		
		400	40	30	300	5
			60	50		
		450	40	30	350	5
			60	50		
		500	40	30	400	5
			60	50		
		600	40	30	500	5
			60	50		
		800	40	30	700	5
			60	50		
1000	40	30	790	60		
	60	50				

Joining Methods

SUNLINE Belts can be joined using hot or cold jointing methods. Joint types include finger, overlap, lace (fastener), but most common are finger or overlap.


• Finger joints

Small pulleys and knife edges require flexibility, so smooth belt surfaces and precision thickness is required. This type of joint is not appropriate for high temperature areas or for roller applications with clinging matter on the belt.

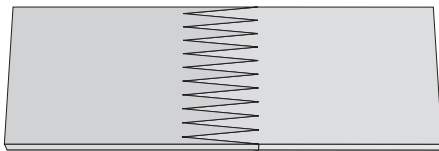


• Overlap joints

Belts are overlap joined after aligning in a step-like pattern, when finger joints cannot be used. This method is generally used where heat and humidity resistance is required. Hot or cold joints may be used, but cold joining is not applicable in places with high temperatures.

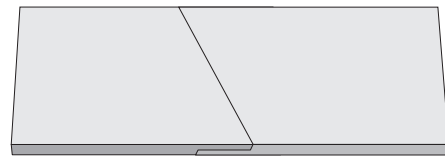


• Double finger joints (specialty)

Combination finger and overlap joint. Easy use on small pulleys, and strong against foreign matter. Applicable for 2 ply belts.

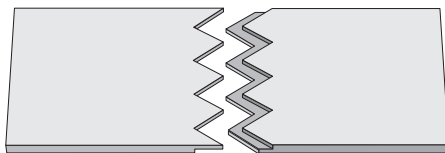

• Lace joints

Simple joining method using metal clips or fasteners to easily join and replace belts. However, joint strength is inferior to hot and cold joints.

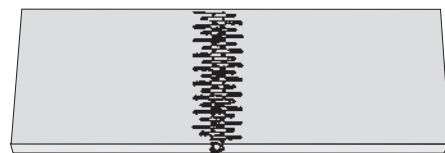


※ Skiver joints are also possible. Please contact Bando or your distributor.


Belt tension adjustment

Proper tension is determined by conveyor structure and materials, and the weight of the materials conveyed, so it is difficult to precisely determine proper tension. It is better not to put more tension than the permanent elongation. Please refer to the procedure below.

① Mark a 1000mm (1m) line on an inconspicuous place on the belt.

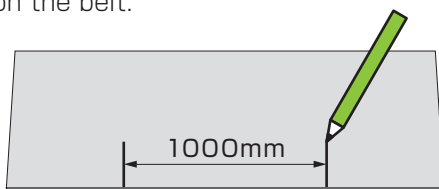

② Gradually add tension until the mark is 1002mm.

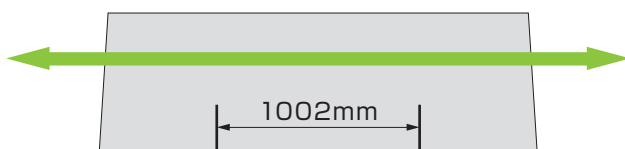

③ Run the belt under this condition, and check for belt slipping. (Also adjust if there is snaking.)

Test conveyance if there is no problem. If there is still no problem, it can be used as it is.

※ Please do step 4 if the belt slips when loading the material.

④ If there is belt slipping, add tension to the belt little by little until the belt does not slip or snake. Test conveyance, and use if there is no problem.

Standard Width

Widths are standard for ease of use. Please use standard widths from the table below when ordering.

- **Common specifications for SUNLINE Belts** (not including Super SUNLINE and inclined conveyer belts)

Belt width range (mm)	Standard width (mm)
50~100	50, 60, 70, 80, 90, 100
101~200	120, 140, 150, 160, 180, 200
201~300	220, 240, 250, 260, 280, 300
301~650	350, 400, 450, 500, 550, 600, 650
700~1000	700, 750, 800, 850, 900, 950, 1000
1001~2500	Every 100mm

※ Please contact Bando or your distributor for non-standard widths.

Dimensional tolerance

- **General use belts**

Width

Width (mm)	Tolerance (mm)
~100	±2
101~400	±2
401~600	±3
601~800	±4
801~1000	±5
1001~1800	±5
1801~2500	±6

Length

Length (mm)	Joints (mm)	
	Tolerance	Difference in lateral circumference length
~1000	±4	4
1001~3000	±5	6
3001~5000	±7	8
5001~10000	±10	10
10001~	±0.1%	0.1%

※ If the belt length is 20m or longer, joining at site is recommended.

Thickness

Thickness (mm)	Main body tolerance (mm)	Joint tolerance (mm)		
		Lap		Finger
~1.0	±0.1	1ply	2ply	±0.2
		+0.7 -0.1	+0.3 -0.2	
1.1~1.5	±0.2	+0.5	-0.2	±0.3
1.6~2.0	±0.2	+0.5	-0.2	±0.3
2.1~2.5	±0.3	+0.5	-0.2	±0.3
2.6~3.0	±0.3	+0.5	-0.3	±0.3
3.1~3.5	±0.3	+0.5	-0.4	±0.3
3.6~4.0	±0.4	+0.6	-0.4	±0.4
4.1~4.5	±0.4	+0.7	-0.4	±0.4
4.6~5.0	±0.5	+0.7	-0.4	±0.4
5.1~	±0.5	+0.7	-0.4	±0.4

※ Joint thickness tolerance is about the same as main body tolerance.

- **Dry heat resistant belts** (except heat resistant felt)

Width

Width (mm)	Tolerance (mm)
~100	±2
101~400	±2
401~600	±3
601~800	±4
801~1000	±5
1001~1800	±8

Length

Length (mm)	Joints (mm)	
	Tolerance	Difference in lateral circumference length
~1000	±7	7
1001~3000	±10	10
3001~5000	±15	15
5001~10000	±20	20
10001~	±0.2%	0.2%

※ If the belt length is 20m or longer, joining at site is recommended.

Thickness

Thickness (mm)	Main body tolerance (mm)	Joint tolerance (mm)	
		Lap	
1.1~1.5	±0.2	+0.5	-0.2
1.6~2.0	±0.25	+0.5	-0.2
2.1~2.5	±0.25	+0.5	-0.2
2.6~3.0	±0.3	+0.5	-0.3

※ Joint tolerance is ± against the finished belt body.

Cleats and Custom Fabrication

Cleats (Standard)

Cleats are installed on SUNLINE Belts in a wide range of fields to prevent material from falling, for inclined conveyance, and alignment. Heat vulcanization does not limit the use of water or oil in applications. (However, water and oil applications are limited using cold joins.)

Features

Effective against spillage and for inclined conveyance

Prevents drops and slipping. Conveyance at 30~50° , depending on conditions

Nontoxic, odorless

Meets Article 370 standards of the Food Sanitation Act of the Health and Welfare Ministry

Clean, and stain resistant - washable with water

Good appearance and keeps a clean and comfortable work environment

How to Read Specifications

〈T and C〉

SL-T 20 U G

① ② ④ ⑤

〈F〉

SL-F 5 3 0 U G

① ② ③ ④ ⑤

① Cleat shape ② Height : mm ③ Width : mm ④ Material : Polyurethane ⑤ Color : G...Green W...White

Products


Type	Shape	Name	Color	Material	H : Height (mm)	W : Width (mm)	t : Thickness (mm)	Weight (g/m)	Minimum pulley diameter (mm/φ)	
T		SL-T20U (G)	Green	Polyurethane	20	20	4	140	50	
		(W)	White							
		SL-T30U (G)	Green		30	20	4	180	60	
		(W)	White							
		SL-T50U (G)	Green			50	30	7	330	70
		(W)	White							
C		SL-C30U (G)	Green			30	25	5	210	50
		(W)	White							
		SL-C50U (G)	Green			50	30	7	340	70
		(W)	White							
		SL-C70U (G)	Green		70	35	9	540	100	
		(W)	White							
F		SL-F530U (G)	Green		5	30	—	185	100	
		(W)	White							
		SL-F55U (G)	Green		5	5	—	31	50	
		(W)	White							
		SL-F510U (G)	Green		5	10	—	62	50	
		(W)	White							

For unpackaged food conveyance

O: Meets Article 370 standards of the Food Sanitation Act of the Health and Welfare Ministry (not including cotton and wool felt)

X: Do not use for unpackaged food, but may be used to convey food packed in bags, boxes or trays

Cleat Types

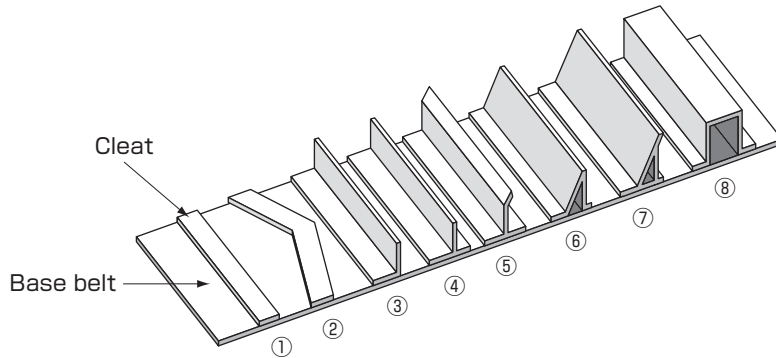

- ① Flat
- ② Centering
- ③ L
- ④ T
- ⑤ TC
- ⑥ V-shaped A
- ⑦ V-shaped B
- ⑧ Box


Specialty cleat processing examples

• Vertical cleats for curved conveyance



Vertical cleats fixed with bearings attached to both edges to prevent material spills

• Specialty cleat processing

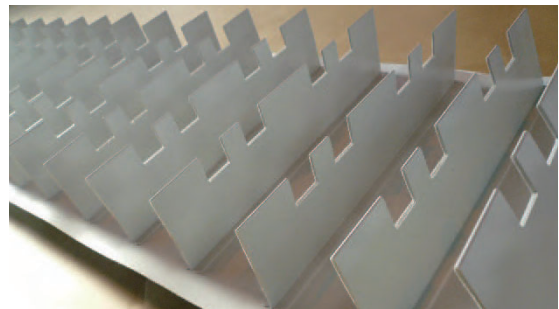


Different cleat types are available depending on the material conveyed.

• Specialty cleat processing




Small pulleys may be used as the belt and cleat are made of the same materials, so the join area is small.

• Specialty cleat processing

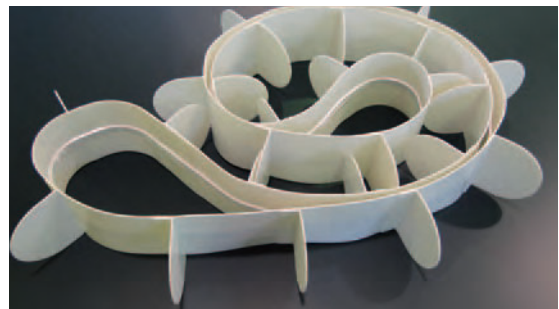

Cleats made to fit machinery use

• Centering

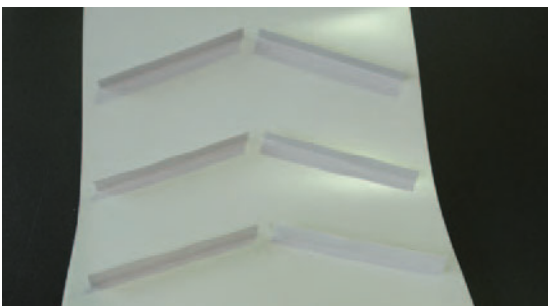

Centering cleats on the belt surface for inclined conveyance of bulk materials

Cleats and Custom Fabrication

V-guides can be used to prevent snaking. They can also be used to prevent products from falling off a conveyor by attaching them to the top of the belt, as V-guides are longitudinally flexible.

Features

- Effective in snaking and spillage prevention
- Heat vulcanization allows for use on small pulleys
- Nontoxic and odorless

Standard PU and humidity and heat resistant PU meets Article 370 standards of the Food Sanitation Act of the Health and Welfare Ministry

How to Read Specifications

SL- V M 2 C G


- ① V-guide ② Type
 ③ Shape: 1...trapezoid 2...trapezoid with groove
 ④ Material: C...PVC K...Humidity and heat resistant PU R...Oil resistant PVC U...PU
 ⑤ Color: G...Green W...White AW...White DB...Navy blue

Products

Type	Shape	Product name	Color	Material	H : Height (mm)	W1 : Top width (mm)	W2 : Bottom width (mm)	Weight (g/m)	Minimum pulley diameter Normal/ Reverse (mm / φ)	Hardness (JIS-A)	Unpackaged food conveyance
D		SL-VD1UW	White	PU	3	5	2	19	30 / 30	90	○
S		SL-VS2U (G) (W)	Green White	PU	3.1	9.5	7	26	25 / 25	82	○
		SL-VS2USW	White	PU	3.1	9.5	7	26	25 / 25	65	○
		SL-VS2KAW	White	Humidity and heat resistant PU	3.1	9.5	7	26	30 / 30	80	○
		SL-VS2CB	Blue	PVC	3.1	9.5	7	26	30 / 30	75	×
N		SL-VN2U (G) (W)	Green White	PU	4.1	7	4.2	30	40 / 40	82	○
M1		SL-VM1KAW	White	Humidity and heat resistant PU	5.5	10	6	54	60 / 50	80	○
		SL-VM1UG	Green	PU	5.5	10	6	54	60 / 50	82	○
M2		SL-VM2C (G) (W)	Green White	PVC	5.5	10	6	51	45 / 45	70	×
		SL-VM2RDB	Navy blue	Oil resistant PVC	5.5	10	6	51	45 / 45	70	×
		SL-VM2KAW	White	Humidity and heat resistant PU	5.7	9.7	6	54	60 / 50	82	○
A1		SL-VA1UG	Green	PU	8.5	13	7.5	90	90 / 70	82	○
A2		SL-VA2C (G) (W)	Green White	PVC	8.5	13	7.5	88	70 / 60	70	×
		SL-VA2RDB	Navy blue	Oil resistant PVC	8.5	13	7.5	88	70 / 60	70	×
B		SL-VB2C (G) (W)	Green White	PVC	10.3	16.7	9.3	147	120 / 105	70	×
		SL-VB2RDB	Navy blue	Oil resistant PVC	10.3	16.7	9.3	147	120 / 105	70	×
H		SL-VH4X2UC	Transparent	PU	2.1	4.1	4.1	9	25 / 25	85	○
O		SL-VO2UW	White	PU	3.1	7	5	29	40 / 40	80	○

※○: Meets Article 370 standards of the Food Sanitation Act of the Health and Welfare Ministry. ×: V-guides may only be used on belt backsides that do not directly come into contact with unpackaged food.
 ※The dimensions above are for V-guide components. The height of the V-guide might be around 0.5mm shorter after heat processing.

Groove dimensions



■ Pulley groove

Type	W (mm)	H (mm)	O (°)
D	8	5	60
S	14	5	40
N	11	6	40
M	14	7.5	40
A	17	10.5	40
B	20.7	12.3	40
H	7	4	0
O	11	5	40

■ Table groove

Type	W (mm)	H (mm)
D	10	5
S	15	5
N	13	6
M	15	8
A	20	11
B	25	13
H	7	4
O	13	5


Cleats and Custom Fabrication Examples

- **Multi-row V-guides**




Multi-row V-guides on the belt surface are used to align granular transport.

- **Bancollan Sheet Cleats**

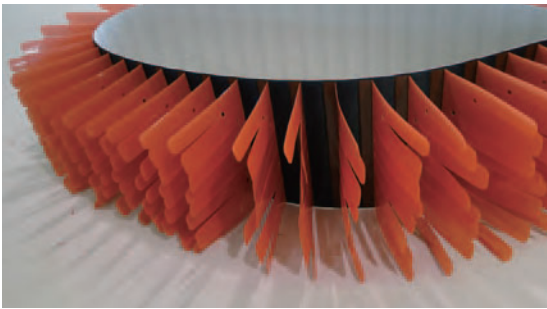


Multiple Bancollan Sheets, made of flexible urethane.

- **Punched Holes + V-guides**

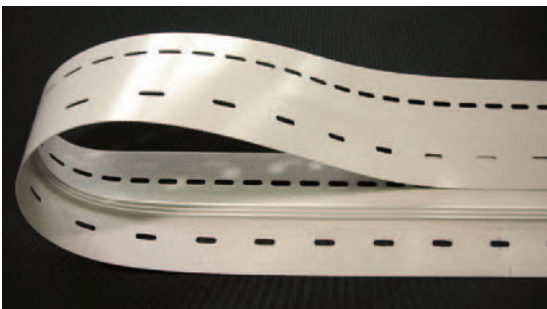

Holes punched through the belt are used in suction conveyance.

- **Edge Seals**



Pre-processing



Post-processing (edge)




Post-processing (surface)



Post-processing (backside)

Covering the belt edges with resin suppresses foreign matter entry and fraying.

- **Marking + Fixed Cleats**

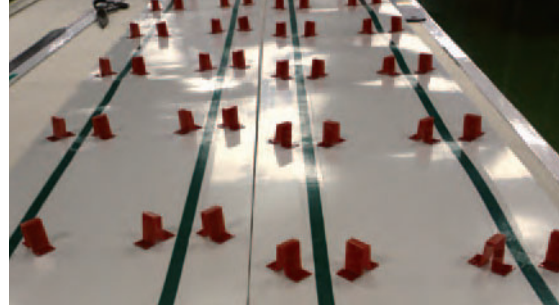


Marking and cleats are used to position the materials being conveyed.

- **Cushion (sponge) Fabrication**



Sponge on the belt surface and V-guides on the belt backside are used in sandwich conveyance.

- **Cushion (strand material) Fabrication**

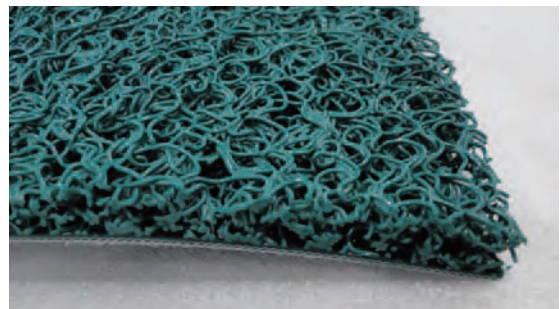

Cushion on the belt surface prevents product rolling and damage to materials conveyed.

Oil and Chemical Resistance

The table below shows belt suitability for conveying products containing chemicals and oil at room temperature.

Chemical

Chemical	Belt cover material	PU	PVC	Polyester (impregnated, canvas surface) PET	Oil resistant chloride vinyl	Specialty rubber Special R	Heat resistant rubber Silicon rubber	Fluorine resin		Specialty synthetic resin
								Surface	Backside	
Isopropyl alcohol		○	△	△	△	△	○	○	○	○
Ethyl alcohol (ethanol)		○	△	○	○	△	○	○	○	○
Potassium chloride		○	○	○	○	○	○	○	○	○
Calcium chloride		○	○	○	○	○	○	○	○	○
Hydrochloric acid (gas)		×	△	×	△	△	○	○	○	○
Hydrochloric acid (5-36%)		×	○	×	○	○	○	○	○	○
Hydrochloric acid (5% or less)		○	○	○	○	○	○	○	○	○
Caustic soda (sodium hydroxide)		△	○	○	○	○	○	○	○	○
Sodium hydroxide solution (50%)		△	○	×	○	○	×	△	×	△
Volatile oil		○	△	○	○	△	△	○	△	○
Strong alkali		△	△	×	△	△	△	△	×	△
Strong acid		×	△	×	△	△	○	○	○	○
Light oil		○	×	△	△	×	△	○	×	○
Ethyl acetate		×	×	×	×	×	△	○	×	○
Sodium hypochlorite (undiluted)		△	○	△	○	○	○	○	○	○
Sodium hypochlorite (600PPM)		○	○	○	○	○	○	○	○	○
Weak alkali		○	○	○	○	○	○	○	○	○
Weak acid		○	○	○	○	○	○	○	○	○
Soap		○	○	○	○	○	○	○	○	○
Cutting oils		△	×	△	○	×	×	○	×	○
Diesel oil		○	△	△	○	△	×	○	×	○
Toluene		△	×	△	×	×	×	○	×	○
Naphthalene		△	△	△	△	△	×	○	×	○
Paraffin oil		○	△	○	○	△	○	○	○	○
Phenol		△	△	△	△	△	△	○	△	○
Anti-rust oil		△	×	△	○	×	×	○	×	○
Machine oil		△	×	△	○	×	×	○	×	○
Methyl alcohol (methanol)		○	△	○	○	△	○	○	○	○
Sulfuric acid (10%)		△	△	△	△	△	△	○	△	○
Sulfuric acid (50%)		△	△	△	△	△	△	○	△	○
Sulfuric acid (70%)		×	×	×	×	×	△	○	×	○
Sulfuric acid (98%)		×	×	×	×	×	×	○	×	○

○ : No erosion △ : Some erosion (brittleness, color change, swelling may occur) × : Complete erosion

* The SUNLINE Design Manual shows the effectiveness against additional chemicals.

* Please contact Bando or your distributor if the belt is unsuitable against corrosion or if it is used at temperatures above room temperature.

The table below shows belt suitability for conveying food products at room temperature.

Food

Food	Belt cover material	PU	PVC	Polyester (impregnated, canvas surface) PET	Oil resistant chloride vinyl	Specialty rubber Special R	Heat resistant rubber Silicon rubber	Fluorine resin		Specialty synthetic resin
								Surface	Backside	
Yeast		○	○	○	○	○	○	○	○	○
Tea leaves		○	○	○	○	○	○	○	○	○
Olive oil		○	△	○	○	△	△	○	△	○
Fruits		○	○	○	○	○	○	○	○	○
Cashews		×	×	×	×	×	×	○	×	○
Cream		○	△	○	○	△	○	○	○	○
Spices		○	○	○	○	○	○	○	○	○
Cereals		○	○	○	○	○	○	○	○	○
Coffee beans		○	○	○	○	○	○	○	○	○
Flour		○	○	○	○	○	○	○	○	○
Rice		○	○	○	○	○	○	○	○	○
Fish		○	△	○	○	△	△	○	△	○
Sugar		○	○	○	○	○	○	○	○	○
Salt		○	○	○	○	○	○	○	○	○
Salt water		○	○	○	○	○	○	○	○	○
Fats		○	△	○	○	△	×	○	×	○
Cooking oil		○	△	○	○	△	△	○	△	○
Syrup		○	○	○	○	○	○	○	○	○
Soy sauce		○	△	○	○	△	△	○	△	○
Vinegar		○	△	○	○	△	△	○	△	○
Sauces		○	△	○	△	△	△	○	△	○
Molasses		○	○	○	○	○	○	○	○	○
Meats		○	△	○	○	△	△	○	△	○
Butter		○	△	○	○	△	△	○	△	○
Breads		○	○	○	○	○	○	○	○	○
Peanut oil		○	×	○	○	×	×	○	×	○
Beer		○	○	○	○	○	○	○	○	○
Margarine		○	△	○	○	△	△	○	△	○
Mayonnaise		○	△	○	○	△	△	○	△	○
Water (+60 °C or less)		○	○	○	○	○	○	○	○	○
Hot water (+60 °C or more)		●	×	●	×	×	×	×	×	×
Lard		○	△	○	○	△	△	○	△	○

○ : No erosion △ : Some erosion (brittleness, color change, swelling may occur) × : Complete erosion
 ● : Some belt specifications are not applicable for use. Please contact Bando or your distributor for details.
 ○ : May be used. However, please contact Bando or your distributor if the belt has almost constant contact with oils or is used at temperatures above room temperature.
 △ : May be used if the belt surface has some contact with oil but immediately dries. Please contact Bando or your distributor if this is difficult to assess.
 ※ ○ and △ : Unlikely for brittleness, color change or swelling to occur. However, mold might occur.
 Although it is difficult to completely prevent the occurrence of mold, it can be delayed by cleaning the belt and wiping off moisture.

Safe Use of Sunline Belts

Storage

- Avoid storage in direct sunlight. In particular, store the fluorine film type with the black polyethylene cover completely shielded from direct sunlight.
- Store at temperatures of 0~40°C, with humidity at or below 80%, without exposure to water.
- Do not stack multiple belts or sharply bend belts in storage. Avoid storing the belts directly on the floor; keep them on shelves or pallets.
- Avoid belt contact with oil and chemicals.

Usage Precautions

Symbol and meaning

Contents

- ⚠ **Danger** Imminent risk of serious injury or death due to incorrect or improper handling.
- ⚠ **Warning** Risk of serious injury or death due to incorrect or improper handling.
- ⚠ **Caution** Risk of personal injury or property damage due to incorrect or improper handling.

1 Function and Performance

- ⚠ **Warning** ● Do not use SUNLINE Belts outside the permissible operating range shown in this catalog (pulley diameter, elongation, resistance to chemicals, etc.)
- ⚠ **Warning** ● When conveying upackaged food, please use belts that meet Food Sanitation Act standards of Ministry of Health and Welfare (Articles s 370 and 85).

2 Notes for Storage and Transport

- ⚠ **Warning** ● Use of open flames strictly prohibited
- ⚠ **Warning** ● Store heavy belts with appropriate parts or stoppers so that the belts do not fall down or roll.
- ⚠ **Caution** ● Avoid direct sunlight and humid areas. Cover belts with cloth or sheet.
- ⚠ **Caution** ● Do not allow abnormal distortion to the belt during storage and transport.

3 Notes for installation and daily use.

- ⚠ **Danger** ● Do not allow any part of the body or clothing to contact pulleys or rollers during operation.
- ⚠ **Danger** ● Switch off the conveyor and related equipment before installation or repair.
- ⚠ **Warning** ● Do not use chemicals harmful to the human body while cleaning the belt.

4 Engineering (installation, joins)


- ⚠ **Warning** ● Ventilate well when using solvents and adhesives. Open flames are strictly prohibited in the working area.
- ⚠ **Warning** ● Do not leave solvents or adhesives at the work site.
- ⚠ **Caution** ● Install and join belts in accordance with the materials, methods and steps recommended by Bando.

5 Replace the belt or contact Bando or your distributor if any of the following occur while using SUNLINE Belts.

- ⚠ **Warning** ● The join portion comes apart or seems likely to come apart soon.
- ⚠ **Warning** ● The belt edge is cut and the tear is growing.
- ⚠ **Warning** ● The belt cover material is worn down and the carcass appears.
- ⚠ **Warning** ● The belt edge is frayed or there is abrasion debris in the frame guide area that may introduce foreign matter to the products conveyed.

6 Handling of used belts

- ⚠ **Caution** ● Lawfully dispose of belts as industrial waste.
- ⚠ **Warning** ● Do not expose to fire.

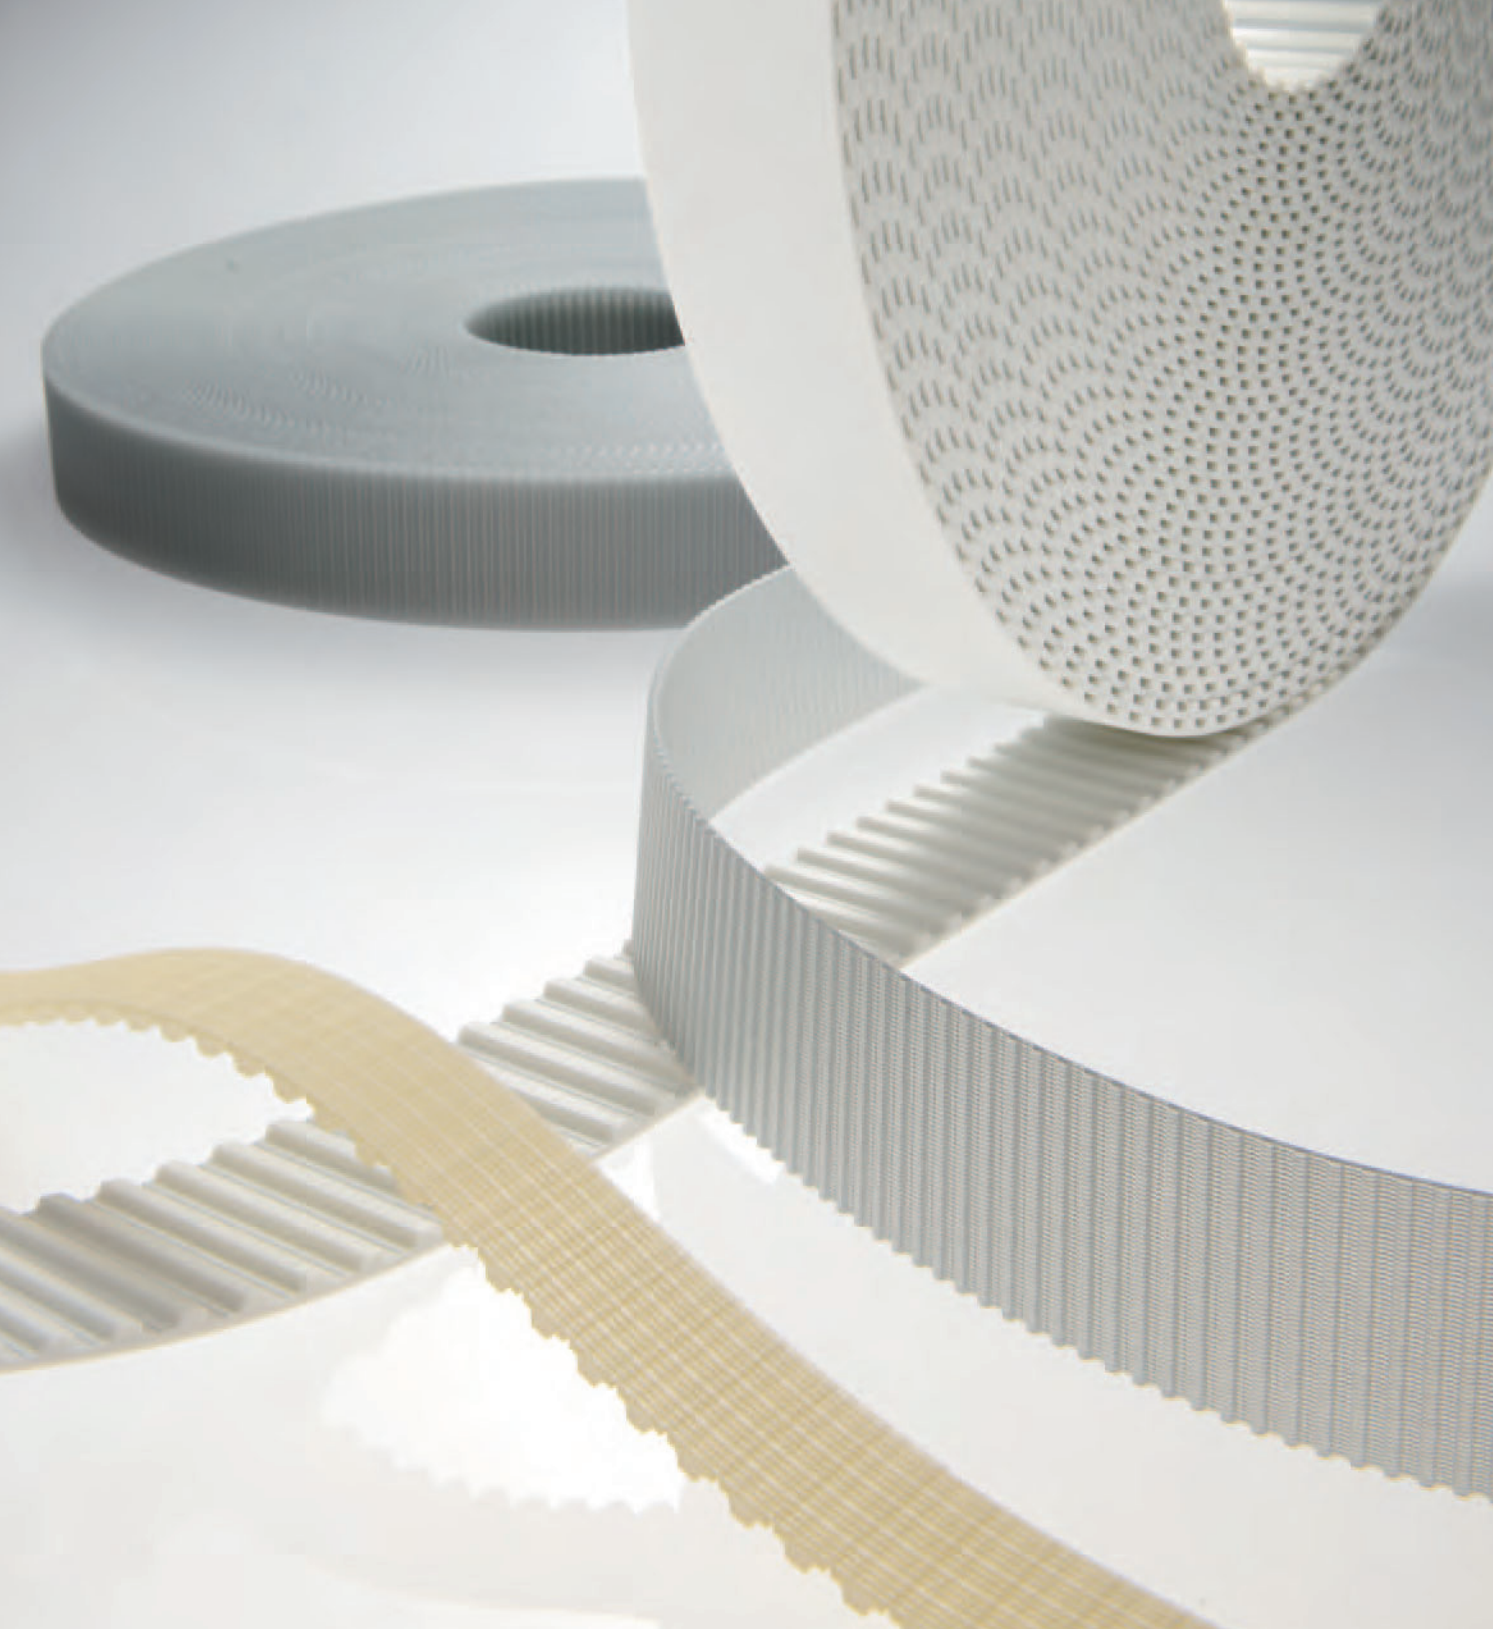

Features and
Major Applications

SUNLINE Belts

Belt
Selection

Food

Logistics/
General Purpose

Special
Purpose

Super
SUNLINE Belts

Inclined
Conveyance

Design Materials/
Special Processes

Bancollan Long
Synchronous Belts

PS Belts

Bancord
Round Belts


Glossary

BANCOLLAN™ LONG SYNCHRONOUS BELTS

Bancollan Long Synchronous Belts


Bancollan Long Synchronous Belts, made from polyurethane, are capable of long-span synchronous transmission and conveyance. They are suitable for food processing machinery and sanitary transmission and conveyance. Various types of cleat profiles may be used to increase conveyor functions.

Construction

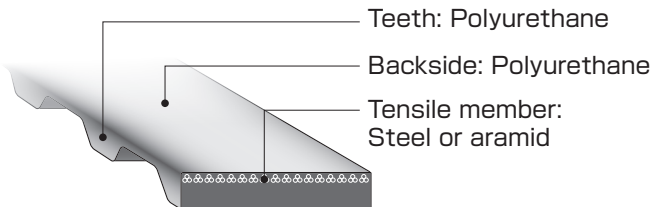

Steel is suitable in applications where responsiveness or size and positioning are required.
Aramid is suitable for food applications.

Color

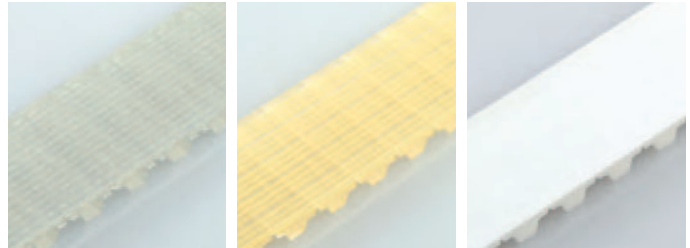

SW: Transparent (Wire tensile member)

SK: Transparent (Aramid)

White

Features

- Excellent cleanliness with less dust
- Join to desired length
- Cleats may be fabricated on the top side of the belt.
- Low elongation of steel cord belts
- May be used for food conveyance (meets Article 370 standards of the Food Sanitation Act of the Health and Welfare Ministry)
- May be used in long-span synchronized transmission




How to Read Specifications

25 T - 890 S W - J


- ① Belt width, nominal width (mm) ② Type ③ Number of [Trapezoid teeth T5~H], Length (mm) of [Round teeth S2M~S25M]
 ④ Material : S...Standard·semi-transparent W...Standard·white L...Low abrasion·white B...Low friction·blue
 M...Moisture and heat resistance·white
 ⑤ Tensile member material : W...Steel cord K...Aramid cord ⑥ Joint type : J...Jointed C...Open end No mark...Roll type
 Please contact us about the combination of rubber material and tensile material.

Usage examples

Bancollan Long Synchronous Belts have various uses. For example, reciprocating motion of automatic doors or printer heads, synchronized conveyance of products on the belt top, panel conveyance by multiple belt drives and pulling products by sandwiching belts. Please contact Bando or your distributor for custom cleat profiles for these versatile belts.

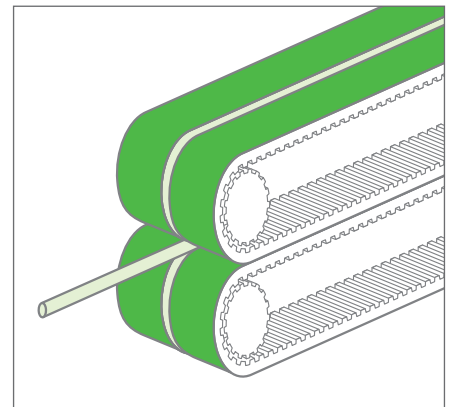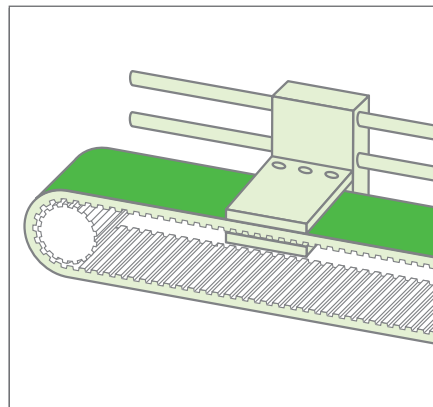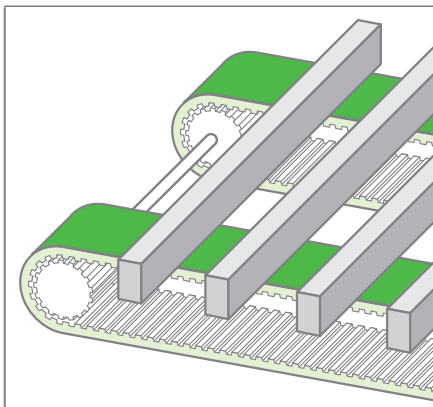

Products

Type	Shape	Dimensions (mm)			Top, tooth material	Tensile member	
		P	h ¹	h ²		W : Steel	K : Aramid
T5		5.00	1.20	2.20	S : Standard•semi-transparent	<input type="radio"/>	<input type="radio"/>
T10					W : Standard•white	<input type="radio"/>	
					L : Low abrasion•white	<input type="radio"/>	
					B : Low friction•blue		<input type="radio"/>
					M : Moisture and heat resistanc•white	<input type="radio"/>	
		S : Standard•semi-transparent	<input type="radio"/>	<input type="radio"/>			
XL		W : Standard•white	<input type="radio"/>				
		L : Low abrasion•white	<input type="radio"/>				
		B : Low friction•blue		<input type="radio"/>			
		M : Moisture and heat resistanc•white	<input type="radio"/>	<input type="radio"/>			
		S : Standard•semi-transparent	<input type="radio"/>	<input type="radio"/>			
L		W : Standard•white	<input type="radio"/>				
		L : Low abrasion•white	<input type="radio"/>				
		M : Moisture and heat resistanc•white	<input type="radio"/>				
		S : Standard•semi-transparent	<input type="radio"/>	<input type="radio"/>			
		W : Standard•white	<input type="radio"/>				
H	L : Low abrasion•white	<input type="radio"/>					
	M : Moisture and heat resistanc•white	<input type="radio"/>	<input type="radio"/>				
	S : Standard•semi-transparent						
	W : Standard•white						
	L : Low abrasion•white						
S2M	M : Moisture and heat resistanc•white						
	S : Standard•semi-transparent						
	W : Standard•white						
	L : Low abrasion•white	<input type="radio"/>					
	M : Moisture and heat resistanc•white						
S3M	S : Standard•semi-transparent						
	W : Standard•white						
	L : Low abrasion•white	<input type="radio"/>					
	M : Moisture and heat resistanc•white						
	S : Standard•semi-transparent						
S5M	W : Standard•white						
	L : Low abrasion•white	<input type="radio"/>					
	M : Moisture and heat resistanc•white						
	S : Standard•semi-transparent						
	W : Standard•white						
S8M	L : Low abrasion•white	<input type="radio"/>	<input type="radio"/>				
	M : Moisture and heat resistanc•white						
	S : Standard•semi-transparent						
	W : Standard•white						
	L : Low abrasion•white	<input type="radio"/>					
S14M	M : Moisture and heat resistanc•white						
	S : Standard•semi-transparent						
	W : Standard•white						
	L : Low abrasion•white	<input type="radio"/>					
	M : Moisture and heat resistanc•white						
S25M	S : Standard•semi-transparent						
	W : Standard•white						
	L : Low abrasion•white	<input type="radio"/>					
	B : Low friction•blue	<input type="radio"/>	<input type="radio"/>				
	M : Moisture and heat resistanc•white						

* : We produce these products

* Please contact Bando or your distributor about production possibilities for products without a circle in the box.

Features and Major Applications

SUNLINE Belts

Belt Selection

Food

Logistics/ General Purpose

Special Purpose

Super SUNLINE Belts

Inclined Conveyance

Design Materials/ Special Processes

Bancollan Long Synchronous Belts

PS Belts

Bancord Round Belts

Glossary

Bancollan Long Synchronous Belts

Production Width Capabilities

• Joint

Type	Belt width (mm)									Minimum length (m)	Maximum length (m)
	10	15	20	25	30	40	50	75	100		
T5	○	○	○	○	○	○	○			0.5	50
T10		○	○	○	○	○				0.5	50
							○	○	○	2	50
S5M	○	○	○	○	○	○	○			0.5	50

Type (Pitch)	Belt width (Top: nominal width, Bottom: mm)										Minimum length (m)	Maximum length (m)
	025	031	037	050	075	100	150	200	300	400		
	6.4	7.9	9.5	12.7	19.1	25.4	38.1	50.8	76.2	101.6		
XL (5.08)	○	○	○	○	○	○	○	○			0.5	50
L (9.525)				○	○	○	○	○			0.5	50
H (12.7)					○	○	○	○			0.5	50
									○	○	2	

• Open end

Type	Belt width (mm)																Roll length (m)		
	5	6	10	12	15	18	20	24	25	30	35	36	40	42	48	50		75	100
T5			○		○		○		○	○			○			○			50
T10					○		○		○	○			○			○	○	○	50
S2M	○		○		○		○		○	○	○		○						60
S3M		○		○		○		○		○		○		○	○				60
S5M			○		○		○		○	○			○			○			50
S8M			○		○		○		○	○			○			○	○	○	30

Type (Pitch)	Belt width (Top: nominal width, Bottom: mm)										Roll length (m)
	025	031	037	050	075	100	150	200	300	400	
	6.4	7.9	9.5	12.7	19.1	25.4	38.1	50.8	76.2	101.6	
XL (5.08)	○	○	○	○	○	○	○	○			50
L (9.525)				○	○	○	○	○			50
H (12.7)					○	○	○	○	○	○	50


* ○: We produce these products

* Please contact Bando or your distributor about production possibilities for products without a circle in the box.


* Please contact Bando or your distributor for the S8M joint type

Pulleys

• STS Pulleys


Type	Tooth shape	Dimensions (mm)			
		W	R	H	a
S2M		1.30	1.325	0.76	0.254
S3M		1.95	1.975	1.14	0.381
S5M		3.25	3.275	1.77	0.480
S8M		5.2	5.30	2.83	0.686

• Synchronous Pulleys


Type	Tooth shape	Dimensions (mm)		
		W	H	θ (°)
T5		1.50	1.70	50
T10		3.40	3.0	50
XL		1.27	1.40	50
L		3.10	2.13	40
H		4.24	2.59	40

Profile Examples


Various functions are possible with surface profiles on Bancollan Long Synchronous Belts. Also, metal parts can be screwed on through holes fabricated in the profiles.




Bancord on the belt surface




V-guides and Bancord on the belt surface



Holes fabricated on P0303



Holes and slits fabricated on profiles



Thin profiles on the belt surface


Standard Profile

Profile No.	Shape	Dimensions (mm)			
		T	H	W	R
P-0102		2.0	50.0	101.6	1.0
P-0103		5.0	50.0	101.6	2.5
P-0104		6.0	50.0	101.6	3.0
P-0105		8.0	50.0	101.6	4.0
P-0106		10.0	50.0	101.6	5.0
P-0107		3.0	50.0	101.6	1.5
P-0108		4.0	50.0	101.6	2.0
P-0201			8.0	5.0	4.36
P-0202	10.0		5.0	6.0	—
P-0203	12.7		8.0	6.9	—
P-0302		2.0	45.0	101.6	—
P-0303		5.0	40.0	101.6	—
P-0304		6.0	40.0	101.6	—
P-0305		8.0	40.0	101.6	—
P-0306		10.0	40.0	101.6	—
P-0307		3.0	45.0	101.6	—
P-0308		4.0	40.0	101.6	—
P-0401			4.0	5.0	2.18
P-0402	5.0		5.0	3.0	—
P-0403	6.35		8.0	3.45	—
P-0501		5.0	10.0	—	5.0
P-0502		3.0	6.0	—	3.0
P-0503		4.0	8.0	—	4.0
P-0504		6.0	12.0	—	6.0
P-9001		17.2	10.0	15.0	—
P-9002		7.0	7.0	15.0	—
P-9004		8.5	7.2	10.0	—
P-9005		26.0	20.2	25.0	—
P-9006		16.0	17.5	25.0	—

Bancollan Long Synchronous Belts

Custom Fabrication

Various custom fabrications are possible with Bancollan Long Synchronous Belts, such as tooth buffing, and hole and sponge fabrications. Please consult with Bando or your distributor.

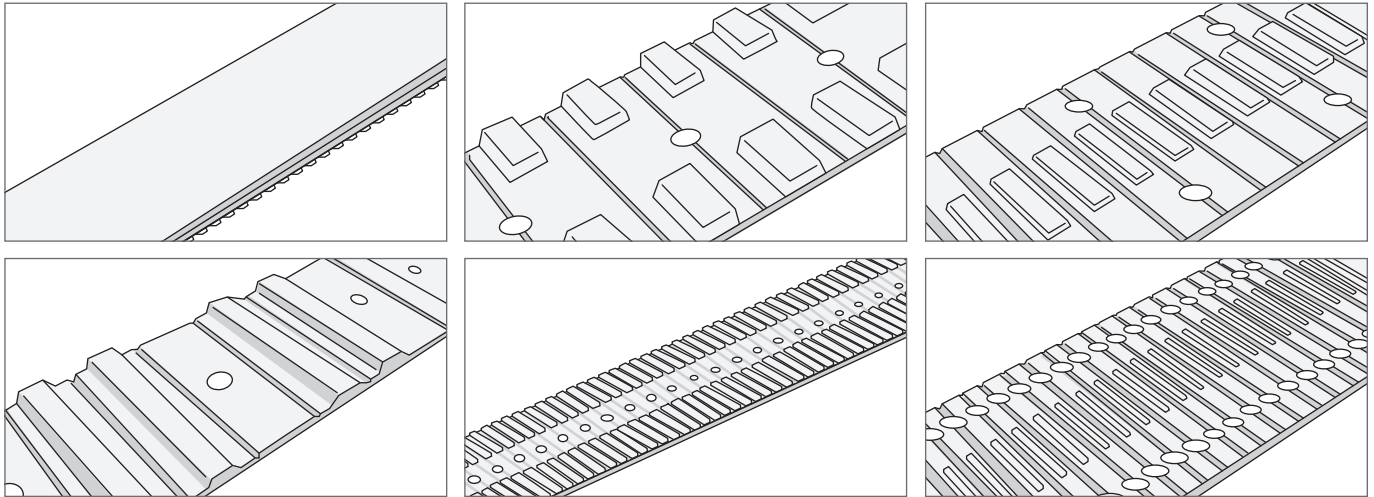

Width joints

Type	Standard Maximum width		Width joints Maximum width		Width joint range		
	Nominal width	Width (mm)	Nominal width	Width (mm)	Polyurethane rubber		Tensile member
					S: Standard	M: Moisture and heat resistance	K: Aramid
T5	50	50.0	100	100.0	○	—	○
T10	100	100.0	300	300.0	○	○	○
XL	200	50.8	400	101.6	○	—	○
L	200	50.8	400	101.6	○	—	○
H	400	101.6	800	203.2	○	○	○

Usage Conditions

● Ambient temperature, humidity

	Temperature	Humidity
Standard material	-20~70°C	75%以下
Moisture and heat resistance material	-20~90°C	85%以下

- Do not allow steam, organic solvents, acid or alkali to adhere to the belts
- Do not dip or immerse in oil (a small amount of oil mist is allowable)
- Ozone: Use at 50PPhm or less
- Do not allow dust to accumulate on the belt.
Install a dust cover if necessary.
- Meets Article 370 standards of the Food Sanitation Act of the Health and Welfare Ministry

Features

- Belt elongation is extremely small due to use of steel wire tensile members
- Narrow widths can withstand heavy loads
- High-precision belt thickness accuracy is high, so there is no take-up from position shifts in risers

How to Read Specifications

25 × 1.2 G W




- ①Width (mm) ②Thickness (mm)
 ③Urethane color : G...gray ④Tensile member : W...Steel wire

Products







Belt	Load capacity (kgf)	Width (mm)	Thickness (mm)	Minimum pulley diameter (mm)	Covered tensile member
25 × 1.2GW	30	25.00 ± 0.80	1.20 ± 0.03	φ 33	×
40 × 1.2GW	50	40.00 ± 0.80	1.20 ± 0.03	φ 33	×
40 × 2.0GW	110	40.00 ± 0.80	2.00 ± 0.05	φ 45	○
50 × 2.0GW	130	50.00 ± 1.50	2.00 ± 0.05	φ 45	○

Usage Precautions




Please read this catalog and our Design Manual, and pay attention to the points below to ensure safe and proper product handling. The impact on safety is described below.

Symbol and meaning	Contents
 Danger …… Imminent risk of serious injury or death due to incorrect or improper handling.	
 Warning …… Risk of serious injury or death due to incorrect or improper handling.	
 Caution …… Risk of personal injury or property damage due to incorrect or improper handling.	




1 Use and Intended Use

-  **Danger** ● A safety device must be installed to stop the belt in case it is severed but continues to run, or if it operates in idle, which could cause serious injury or accident.
-  **Danger** ● Do not use the belt as a sling or a towing tool.
-  **Warning** ● If static electricity is generated by the belt drive, use an anti-static belt and provide a neutralizing mechanism for the drive device to prevent fire or a malfunction of the control equipment.
-  **Caution** ● Do not use the belt as insulation. Please contact Bando or your distributor about the insulation properties of different belt types.
-  **Caution** ● If the belt comes into direct contact with food, use belts that meet Food Sanitation Act requirements.
-  **Caution** ● Do not modify the belt as this may reduce quality and performance.












2 Function and Performance

-  **Caution** ● Do not use belts outside allowable ranges or for applications not shown in this catalog or in the Design Manual, as this may lead to premature belt failure.
-  **Caution** ● If water, oil, chemicals, paint or dust adhere to the belt or pulley, transmission power will degrade and may cause premature belt failure.
-  **Caution** ● Noise may be high for toothed belts in high speed drive applications. If so, please install a soundproof cover.



3 Storage and Transport


-  **Caution** ● Use proper equipment to carry or handle heavy belts and pulleys to avoid physical injury.
-  **Caution** ● Do not forcibly bend the belt, and do not place heavy objects on the belt during storage or transport, as this may damage the belt and cause premature failure.
-  **Caution** ● Please store belts out of direct sunlight at temperatures between -10~40°C in areas with low humidity.

4 Installation and Operation

-  **Danger** ● Install a safety cover over the rotating parts, including the belt and pulley, as hair, gloves or clothing may get caught between the belt and pulleys. Also, injury may occur from flying debris if the belt or pulley breaks.
-  **Danger** ● Please observe the following during maintenance, inspection and replacement:
 - 1) Switch off the equipment, and make sure that the belt and all pulleys have come to a complete stop before maintenance and replacement.
 - 2) Securely fix the machinery in place if there is any possibility that the machinery will move when the belt is replaced.
 - 3) Make sure that the machinery is not accidentally switched on during maintenance and replacement.
-  **Caution** ● Use same-specification products when replacing belts or pulleys. Use of different products may cause premature belt failure.
-  **Caution** ● Check and adjust pulley alignment to avoid premature belt failure due to pulley misalignment.
-  **Caution** ● Do not cut a tensioned belt with a knife or scissors, as the belt may snap and cause injury.
-  **Caution** ● In multi-belt operations, replace all belts at the same time to avoid premature belt failure.
-  **Caution** ● Confirm that the belt correctly enters the pulley groove.
-  **Caution** ● Belt and pulleys may be extremely hot immediately after operation. Do not touch them until they have cooled down.
-  **Caution** ● Loosen belt tension before replacing belts. Do not use a screwdriver or the like to unreasonably force the new belt over the pulley flange or into the V groove as this may cause premature belt failure.
-  **Caution** ● Follow the procedures in this catalog and the Design Manual to give initial belt tension. Improper tensioning may result in premature belt failure or damage to the shaft.
-  **Caution** ● Follow the points below if you additionally process the pulleys.
 - 1) Remove burrs or sharp angles from processed parts.
 - 2) Ensure dimensional accuracy after processing.
 - 3) Ensure pulley strength after processing.

5 Handling of used products

-  **Caution** ● Lawfully dispose of used products as industrial waste.
-  **Danger** ● Do not incinerate used belts as they generate toxic gas.

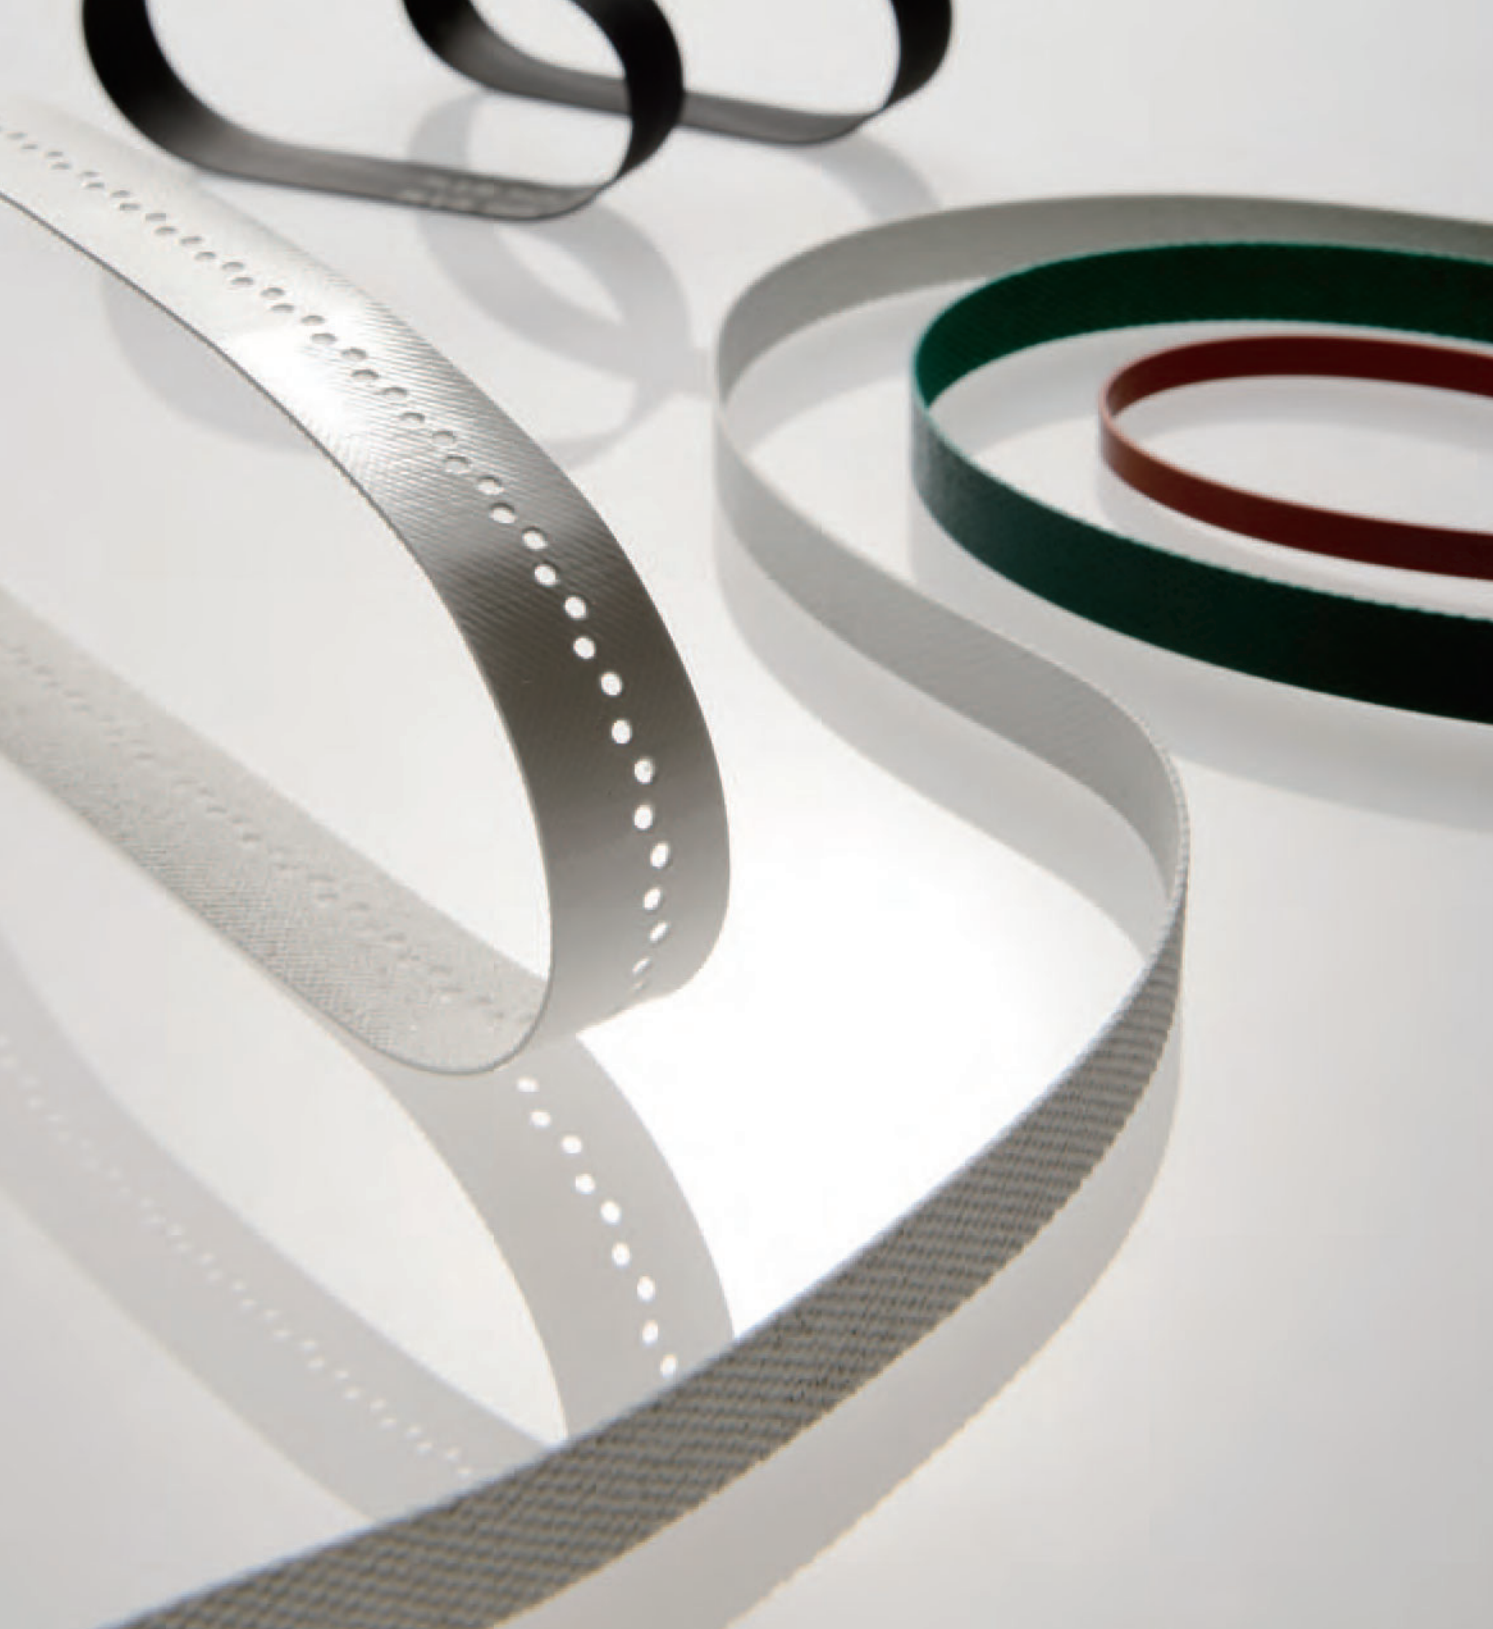

- Features and Major Applications
- SUNLINE Belts
- Belt Selection
- Food
- Logistics/General Purpose
- Special Purpose
- Super SUNLINE Belts
- Inclined Conveyance
- Design Materials/Special Processes
- Bancollan Long Synchronous Belts
- PS Belts
- Bancord Round Belts
- Glossary

PS BELTS™

PS Belts

PS Belts (Precision Seamless) are thin, woven flat belts without seams. High-performance flat belts have experienced remarkable developments in response to demand for their use in the low-vibration, rotational transfer of paper, paper currency, tickets and cards. PS Belts are used in automated equipment in offices, factories, banks and other precision equipment applications.

Features

■ Ideally compact

Thin, seamless and highly flexible, PS Belts can be used with small pulley designs.

■ Smooth rotation

Positioning is always constant because PS Belts are seamless; rotation is smooth and vibration-free.

■ No re-tensioning

PS Belts are specially processed for excellent dimensional stability, with almost no elongation.

■ Contributes to energy conservation

Minimal transmission loss as PS Belts are thin, lightweight and highly flexible.

■ Wide selection available

Various combinations of body/cover materials and surface profiles are available, so the optimum belt can be selected.

How to Read Specifications



B - 2 U F Gr R/F

① ② ③ ④ ⑤ ⑥

- ① **Type**: A...Mainly for high-speed transmission, B...Mainly for lightweight transmission of paper, tickets, etc., C...Mainly for precision transmission, Z...Heat resistance, E...Lightweight transmission
- ② **Tensile strength (N/10mm)**: A, B Series...Number shown x around 100, C Series...Number shown x around 10
- ③ **Materials**: C...Chloroprene rubber, N...Nitrile rubber, U...Polyurethane, H...Hypalon rubber
- ④ **Additional capability**: E...100Ω level conductivity, F...Meets Article 370 standards of the Food Sanitation Act of the Health and Welfare Ministry
- ⑤ **Color**: B...Black, W...White, G...Green, Gr...Gray
- ⑥ **Surface profile**: R...Rough, F...Smooth, M...Mirror, S...Impregnated, K...Polished, P...Pressed, O...Woven fabric

Usage examples

Precision machinery: Gaming machines, currency transmission, ticket scanners, metal detection devices, scales, factory and office automation equipment, medical devices

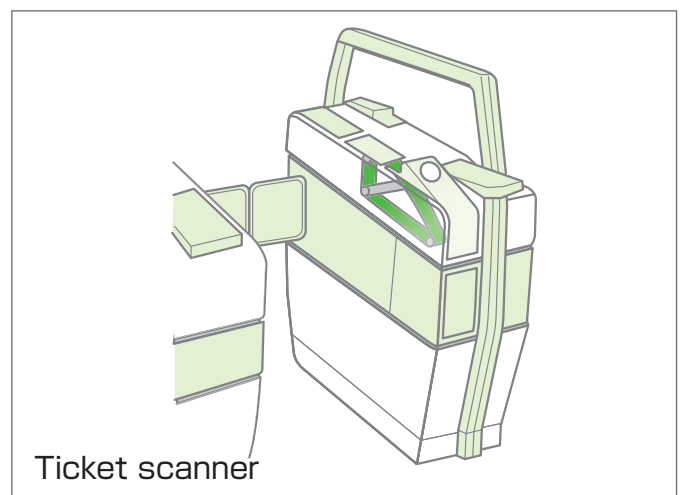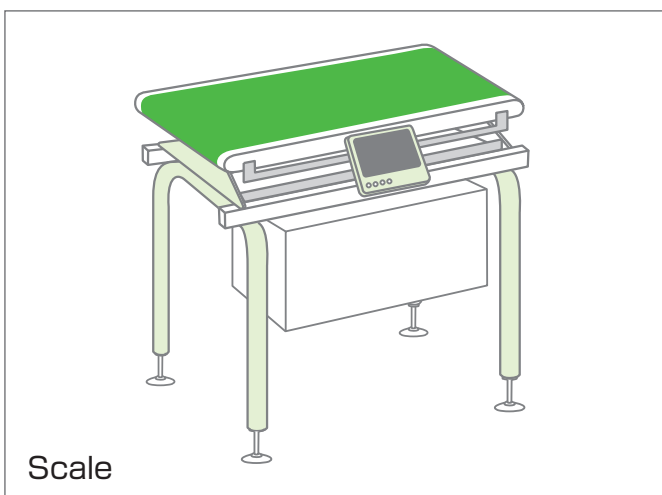

Dimensional tolerance

Thickness

A Series (mm)		B Series (mm)		C Series (mm)		Z Series (mm)		E Series (mm)	
A-1	±0.05	B-2,B-3,B-6	±0.1	C-8,C-16	±0.1	Z-H250X	±0.1	±0.05	
A-4,A-10,A-13	±0.1								

Width

Dimensions (mm)	Tolerance (mm)				Dimensions (mm)	Tolerance (mm)	
	A-1 - A-13	B Series (mm)	C Series (mm)	Z Series (mm)		E Series (mm)	
Less than 30	±0.5	±0.5	±0.5	±0.5	Less than 12	±0.3	
30~less than 100	±1.0	±1.0	±1.0	±1.0	12~less than 20	±0.5	
100~less than 150	±1.5	±1.5	±1.5	±1.5	20~less than 100	±1.0	
150~less than 200	±2.0	±2.0	±2.0	±2.0	100 or more	±1.5	
200 or more	±2.5	±2.5	±2.5	±2.5			

Inner circumference

Dimensions (mm)	Tolerance (mm)				Dimensions (mm)	Tolerance (mm)	
	A-1 - A-13	B Series (mm)	C Series (mm)	Z-H250X		E Series (mm)	
Less than 300	±2	±2	±2	—	Less than 200	±2	
300~less than 600	±3	±3	±3	±	200~less than 400	±3	
600~less than 800	±4	±4	±4	±6	400~less than 600	±5	
800~less than 1000	±5	±5	±5	±7	600~less than 800	±6	
1000 or more	±0.5%	±0.5%	±0.5%	±0.5%	800~less than 1000	±8	
					1000 or more	±0.8%	

※ Please consult with Bando or your distributor if tolerances outside those listed above are needed.
 ※ For matched sets of 1000mm or less, the tolerance should be within 1mm for the belts used; and within 2mm if the belts are longer than 1000mm.

Pulleys

Pulley crown height

Pulley crown height may be found in the graph at right.

Pulley surface finish

3S to 6S coarseness is recommended.

Pulley width

Use the following formula to determine pulley width:

Pulley width (bp) = 1.1 × b + 5 (mm), where b = belt width (mm)

Use the following formula (for A to C types) to determine the radius of curvature of the pulley surface:


$$R \doteq \frac{bp^2}{8hc} \text{ (mm)}$$

※ To prevent belt deviation in wide belts (length/width < 12), greater crown measurements than shown in the graph at right may be needed, which may result in reduced belt life and transmission capacity.


Pulley shape

Use symmetrically-shaped pulleys as shown below.

Avoid angles that shorten belt life.

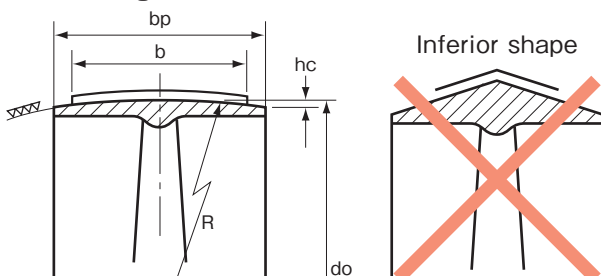


Wide conveyor belts

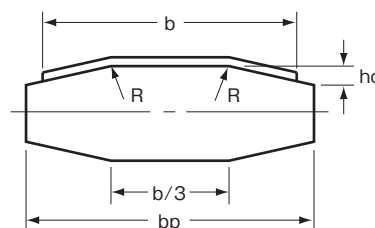

bp : Pulley width
 b : Belt width
 hc : Crown height
 do : Pulley outer diameter
 R : Radius of curvature

※ Do not use a pulley flange.

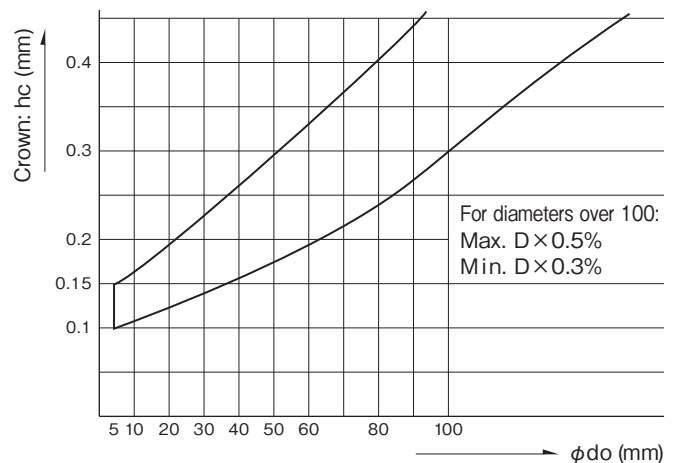

PS Belts

Products

Primary usage	Applications	Belt specifications ※1	Construction						Color	Dimensions ※3		
			Surface ※2			Body		Cover material		Thickness (mm)	Width (mm)	Inner circumference (mm)
			Designation	Top surface	Backside surface	Material	Plies					
Conveyance	Foods	A-1UDW	P/S	Press	Impregnated	Polyester	1	Polyurethane	White	0.22	3~200	400~1500
		A-4UDG	F/R	Smooth	Coarse	Polyester	1	Polyurethane	Green	0.45	5~200	180~2710
		A-4UDGr	F/S	Smooth	Impregnated	Polyester	1	Polyurethane	Gray	0.45	5~200	180~2710
		A-4UDW	P/S	Press	Impregnated	Polyester	1	Polyurethane	White	0.45	5~200	180~2710
		A-4UDBL	P/S	Press	Impregnated	Polyester	1	Polyurethane	Blue	0.45	5~200	400~2710
	Paper (sandwiched conveyance)	B-2CB	R/F	Coarse	Smooth	Polyester	1	Chloroprene rubber	Black	0.80	5~200	250~2600
		C-16UB	R/F	Coarse	Smooth	Polyester	1	Polyurethane	Black	0.60	3~200	160~2500
	Paper (vacuum)	A-4UEB	F/R-A	Smooth	Coarse	Polyester	1	Polyurethane	Black	0.45	~360	180~2710
		E-8UB	M/K-A	Mirror	Polished	Polyester	1	Millable urethane	Black	0.65/0.8/1.0	8~200	50~1457
	Banknotes (sandwiched conveyance)	E-8UB	K/K	Polished	Polished	Polyester	1	Millable urethane	Black	0.65/0.8/1.0	8~200	50~1457
		EXL101B	M/K	Mirror	Polished	Polyester	1	Millable urethane	Black	0.65/0.8/1.0	8~200	50~1457
	Power transmission	Low torque (high speed rotation)	A-4CB	R/F	Coarse	Smooth	Polyester	1	Chloroprene rubber	Black	0.60	5~200
A-4NB			R/F	Coarse	Smooth	Polyester	1	Nitrile rubber	Black	0.60	5~200	180~2710
Medium torque (low speed rotation)		A-10CB	R/F	Coarse	Smooth	Polyester	1	Chloroprene rubber	Black	1.00	5~200	300~2200
		A-10NB	R/F	Coarse	Smooth	Polyester	1	Nitrile rubber	Black	1.00	5~200	300~2200
		A-13CB	R/F	Coarse	Smooth	Polyester	1	Chloroprene rubber	Black	1.10	5~200	300~2200
Specialty	Computer chips	A-1UE	F/F	Smooth	Smooth	Polyester	1	Polyurethane	White	0.24	3~50	100~1500
		A-1N	P/M	Press	Mirror	Polyester	1	Nitrile rubber	Black	0.22/0.23	3~50	100~1500
		CH-1U	P/P	Press	Press	Nylon	1	Polyurethane	White/black	0.18/0.23	5~50	400~1500
	Super heat resistance	ZH250X	M/M	Mirror	Mirror	Aramid	1	Silicon rubber	Brown	0.90	10~200	460~1500
	Bend resistance	A-P	S/S	Woven fabric	Woven fabric	Nylon	2,4,8	Chloroprene impregnation	Black	—	10~100	200~2700
		A-PW	O/O	Woven fabric	Woven fabric	Nylon	2,4,8	Curing agent impregnation	White	—	10~100	200~2700
	General use conveyance (rubber belts)	TB-3CG	R/F	Coarse	Smooth	Polyester	1	Chloroprene rubber	Green	0.85	10~200	
	Heat resistance, weather resistance	B-2HW	R/F	Coarse	Smooth	Polyester	1	Hypalon rubber	White	0.80	5~200	250~2600
		B-2HG	R/F	Coarse	Smooth	Polyester	1	Hypalon rubber	Green	0.80	5~200	250~2600
	Shrinkage resistance against heat	Z-10UW	P/S	Press	Impregnated	Aramid	2	Polyurethane	White	1.30	530	1530
	Forward and reverse conveyance	A-ESS2W	M/O	Mirror	Woven fabric	Polyester	2	Polyurethane	White	1.10	620	2482
	Wear resistance, special thickness	A-FN2BL	M/O	Mirror	Woven fabric	Polyester	2	Polyurethane	Blue	1.5~3.0	50~120	1000~5200
Non-fray	A-4UEB	M/D	Mirror	Grainy	Polyester	1	Polyurethane	Black	0.65	5~200	400~2710	

※1 Other combinations of cover materials, surface shapes and colors are available upon request.

※2 Please select the most appropriate surface to meet your use conditions. (Pulleys with smooth surfaces are generally used.)

Other than above surfaces, Impregnated/ Smooth, Smooth/Smooth and Mirror/Mirror (One side polished) are also possible to produce.

※3 Please inquire if necessary belt dimensions are outside the ranges shown.

Tensile strength N/10mm	Shaft load at proper tension ratio N/10mm	Minimum pulley diameter (mm)	Wear resistance ※4	Oil resistance ※4	Electrical conductivity ※4	Flame resistance ※4	Ozone resistance ※4	Weather resistance ※4	Water, humidity resistance ※4	Food hygiene ※4	Temperature range for use (°C)													Belt specification
											-40	-20	0	20	40	60	80	100	120	140	160	180	200	
150	0.5% 30	5	◎	◎	○	○	◎	○	×	◎	←→													A-1UDW
400	0.5% 45	10	◎	◎	○	○	◎	○	×	◎	←→													A-4UDG
400	0.5% 45	10	◎	◎	○	○	◎	○	×	◎	←→													A-4UDGr
400	0.5% 45	10	◎	◎	○	○	◎	○	×	◎	←→													A-4UDW
400	0.5% 45	10	◎	◎	○	○	◎	○	×	◎	←→													A-4UDBL
250	1% 30 2% 50 3% 60	10	○	○	◎	◎	◎	○	◎	×	←→													B-2CB
160	1% 20 2% 30 3% 40	7	◎	◎	×	○	◎	○	×	×	←→													C-16UB
400	0.5% 45	10	◎	◎	◎	○	◎	○	×	×	←→													A-4UEB
—	5% 10 6% 12 7% 14	8/12/14	◎	○	×	○	◎	○	×	×	←→													E-8UB
—	5% 10 6% 12 7% 14	8/12/14	◎	○	×	○	◎	○	×	×	←→													E-8UB
—	5% 10 6% 12 7% 14	8/12/14	◎	○	◎	○	◎	○	×	×	←→													EXL101B
400	0.5% 45	10	○	○	◎	◎	◎	○	◎	×	←→													A-4CB
400	0.5% 45	10	◎	◎	◎	○	×	○	◎	×	←→													A-4NB
1000	0.5% 110	15	○	○	◎	◎	◎	○	◎	×	←→													A-10CB
1000	0.5% 110	15	◎	◎	◎	○	×	○	◎	×	←→													A-10NB
1350	0.5% 170	20	○	○	◎	◎	◎	○	◎	×	←→													A-13CB
150	0.5% 30	5	◎	◎	○	◎	◎	○	◎	×	←→													A-1UE
150	0.5% 30	5	◎	◎	◎	○	×	○	◎	×	←→													A-1N
150	0.5% 30	5	○	○	◎	◎	◎	○	◎	×	←→													CH-1U
400	1% 120	30	×	○	×	○	◎	◎	◎	×	←→													ZH250X
	1% 130	50	○	○	×	○	◎	○	◎	×	←→													A-P
	2% 210		×	◎	×	×	◎	○	×	×	←→													A-PW
380	1% 70 2% 120 3% 140	10	○	○	×	◎	◎	○	◎	×	←→													TB-3CG
250	1% 30 2% 50 3% 60	10	○	○	×	◎	◎	◎	◎	×	←→													B-2HW
250	1% 30 2% 50 3% 60	10	○	○	×	◎	◎	◎	◎	×	←→													B-2HG
1000	0.5% 80	5	○	○	×	◎	◎	○	◎	◎	←→													Z-10UW
780	0.5% 80	10	○	○	×	◎	◎	○	×	◎	←→													A-ESS2W
2000	0.5% 175	60	◎	◎	×	○	◎	○	×	○	←→													A-FN2BL
350	0.5% 45	10	◎	◎	◎	○	◎	○	×	×	←→													A-4UEB

◎ : Optimum ○ : Suitable △ : Problematic × : Not suitable

※4 These indications are for the general physical characteristics of the cover rubber.

They are not guaranteed, so please consult with your sales representative and evaluate sufficiently.

Features and
Major Applications

SUNLINE Belts

Belt
Selection

Food

Logistics/
General Purpose

Special
Purpose

Super
SUNLINE Belts

Inclined
Conveyance

Design Materials/
Special Processes

Bancord Long
Synchronous Belts

PS Belts

Bancord
Round Belts

Glossary

PS Belt Design and Notes on Use

Environmental conditions

- Use belts within the temperature ranges shown on the previous page.
- Belts may harden at temperatures below the operating range, and belt life may be reduced if used at temperatures exceeding the operating range.
- Avoid use in contact with oils, chemicals and solvents.
- Avoid applications where the belt is in direct contact with food.
However, B-2UF belts have passed Ministry of Health and Welfare Notification No. 20 for such applications.

Pulley shaft misalignment

- Pulley shaft misalignment (parallel, eccentric) can cause belts to snake or separate from the pulley, so align the shafts within 20 degrees of each other.

Safety cover

- Use a safety cover to prevent accidents and belt damage due to the inclusion of foreign matter. However, sealing causes operating temperatures to rise and affects belt life, so provide good ventilation.

Inspection

- Turn off power to the equipment and make sure that rotation has completely stopped before conducting belt inspection and maintenance.

Storage

- Do not allow the belt to become wrinkled or bent in storage.
- The belts are packaged for delivery in polyethylene bags.
Do not remove the belts from the bags prior to use, and store in a cool, dark place, without exposure to moisture or direct sunlight.



- Features and Major Applications
- SUNLINE Belts
- Belt Selection
- Food
- Logistics/General Purpose
- Special Purpose
- Super SUNLINE Belts
- Inclined Conveyance
- Design Materials/Special Processes
- Bancollan Long Synchronous Belts
- PS Belts
- Bancord Round Belts
- Glossary

BANCORD™ ROUND BELTS

Bancord Round Belts

Bancord Round Belts are made from polyurethane “Bancollan”, and are easily joined by heat fusion. Bancord is convenient and easy-to-use, and its superior performance enjoys a good reputation among customers.

Features

■ Freely set belt length

Instantly get the required belt length as the belts are easily and firmly joined by heat. There is no need to use “standard” belt lengths as the length can be freely selected. Designs can take advantage of optimum machinery performance.

■ Multi-axis transmission, 3-dimensional transmission

Since Round Belts have no cross-sectional direction, design possibilities include multi-axis transmission, changes in idler pulley direction, and complex 3-dimensional transmission.





■ Simple installation and management

Round Belts can be installed without dismantling the machinery, and less management is required, such as for troublesome tension adjustments.

■ Superior mechanical properties



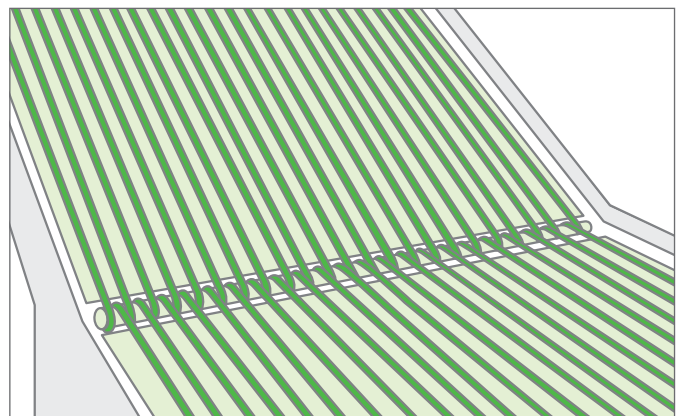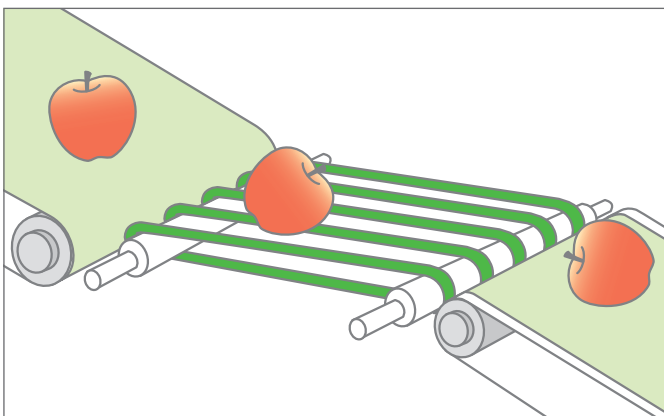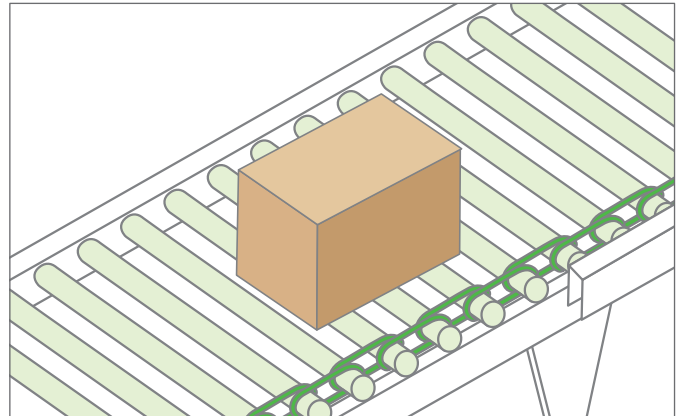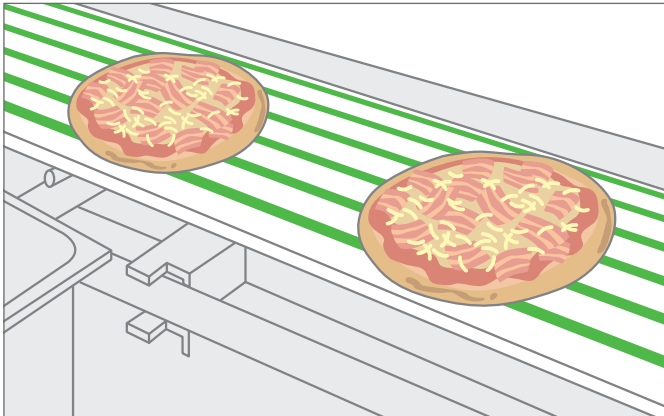


Round Belts are made from Bancollan (polyurethane), with superior resistance to abrasion and tearing. Bancord Round Belts are widely used in industrial applications.

Usage examples



※ Belts are illustrated in green above, which may differ from the actual belt color.

Products

Type	Compound	Product photo	Applications	Color	Cross-sectional diameter (mm)														
					1.5	2	2.5	3	3.5	4	5	6	7	8	9	10	11	12	15
Round Belts	# 480		General purpose and food conveyance	Orange	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	# 485N		Roller conveyor drive	Semi-transparent	-	-	-	○	-	○	○	○	-	-	-	-	-	-	
	# 485RB		Paper, food conveyance ※1	Green	-	-	-	-	-	○	○	○	-	○	-	-	-	-	
	# 489		Wear resistance (high load)	White	○	○	-	○	-	○	○	○	-	○	-	○	-	-	
	Roll length					#480: 200m/roll #485N: 100m/roll #485RB: 100m/roll #489: 100m/roll						100m/roll							
V Belts	M Type (#480, #495)		Top width (mm)	10.0	100m/roll														
			Thickness (mm)	5.5															
			Angle (degree)	40															
	A Type (#480, #495)		Top width (mm)	12.7															
			Thickness (mm)	8.0															
			Angle (degree)	40															
	B Type (#480, #495)		Top width (mm)	16.7															
			Thickness (mm)	10.3															
			Angle (degree)	40															

- ※1 Coarse surface specification
- ※ Bando or your distributor can make joints for you. For belts with diameters up to 2.5mm, the minimum length is 125mm. For belts with diameters of 3mm or more, the minimum length is 50 times belt diameter.
- ※ Color can be manufactured to order.
- ※ Please consult with Bando or your distributor if ϕ 15 joints are necessary
- ※ Round Belts meet Article 370 standards of the Food Sanitation Act of the Health and Welfare Ministry

Pulleys

Cross-sectional diameter (mm)	Minimum pulley pitch diameter (mm)	Cross-sectional diameter (mm)	Minimum pulley pitch diameter (mm)
1.5	12	8	63
2	17	9	69
2.5	20.5	10	80
3	23	11	91
3.5	26	12	107
4	29	15	143
5	40	M Type	50
6	46	A Type	75
7	52	B Type	125

- ※ Bending fatigue increases if less than the minimum pulley diameter is used, resulting in reduced belt life.

Bancord Round Belts

Mechanical properties

Due to its superior mechanical properties, the use of Bancord is growing in general industrial applications, including as a material in transmission belts. The mechanical properties of Bancord are shown below.

Property	#480	#485N	#485RB	#489	#495 (V Type)
Color	Orange	Semi-transparent	Green	White	White
Hardness (JIS-Hs)	85°	86°	86°	90°	95°
Specific gravity	1.23	1.23	1.23	1.23	1.23
Tensile modulus 3% (GPa)	2.9×10^{-4}	2.9×10^{-4}	3.3×10^{-4}	9.8×10^{-4}	1.67×10^{-3}
Tensile modulus 4% (GPa)	3.9×10^{-4}	3.9×10^{-4}	4.4×10^{-4}	1.08×10^{-3}	2.16×10^{-3}
Tensile modulus 5% (GPa)	4.9×10^{-4}	4.9×10^{-4}	5.6×10^{-4}	1.47×10^{-3}	2.55×10^{-3}
Tensile modulus 6% (GPa)	6.4×10^{-4}	6.4×10^{-4}	7.3×10^{-4}	1.52×10^{-3}	2.84×10^{-3}
Tensile modulus 7% (GPa)	6.9×10^{-4}	6.9×10^{-4}	7.9×10^{-4}	1.72×10^{-3}	3.14×10^{-3}
Tensile modulus 100% (GPa)	4.9×10^{-3}	5.40×10^{-3}	5.40×10^{-3}	7.85×10^{-3}	9.81×10^{-3}
Tensile strength at break (GPa)	2.94×10^{-2} or more	2.94×10^{-2} or more	2.94×10^{-2} or more	2.94×10^{-2} or more	3.23×10^{-2} or more
Tensile elongation at break (%)	450 or more	300 or more	300 or more	350 or more	350 or more
Linear expansion coefficient (1°C)	2.6×10^{-4}	2.6×10^{-4}	2.6×10^{-4}	2.6×10^{-4}	2.6×10^{-4}

• Round Belts

Cross-sectional diameter (mm)	1.5	2	2.5	3	3.5	4	5	6	7	8	9	10	11	12	15
Tensile strength (N/belt)	60	100	160	230	310	410	640	930	1150	1500	1900	2360	2850	3390	5300

• V Belts

Type	M	A	B
Tensile strength (N/belt)	1450	2590	4400

Water resistance

Bancord can be used for long periods under conditions of high humidity.

Daily variation in tensile strength under wet conditions (#489)				
Days immersed in water	20	30	50	70
Residual strength (%)	99	98	96	91

※ The sample was immersed in water at 40°C, with 5% elongation.

Oil and chemical resistance

Oil, chemicals	Suitability
Oil resistance - ASTM# 1	○
Oil resistance - ASTM# 3	○
Acid resistance - 10% hydrochloric acid	○
Alkali resistance - 10% caustic soda	△
Organic solvent resistance - acetone	×
Organic solvent resistance - benzene	×
Organic solvent resistance - methanol	△

※ In general, avoid use with strong acids, strong alkali, aromatic hydrocarbon (such as benzene, toluene), ester solvents (such as ethyl acetate), and ketone solvents (such as MEK, acetone).

Joins

Bancord is joined using the following procedure.

Photo 1

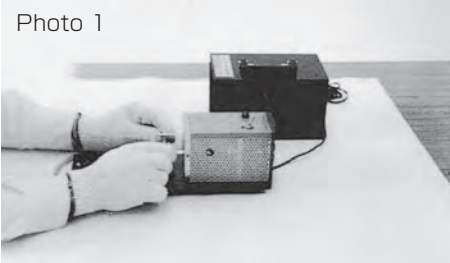


Photo 2

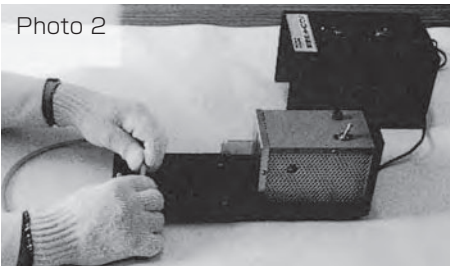


Photo 3


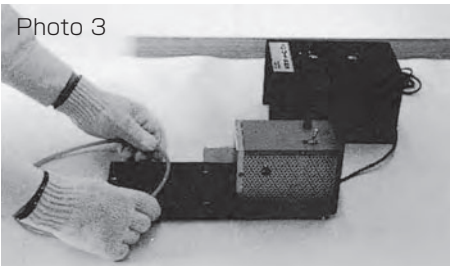


Photo 4

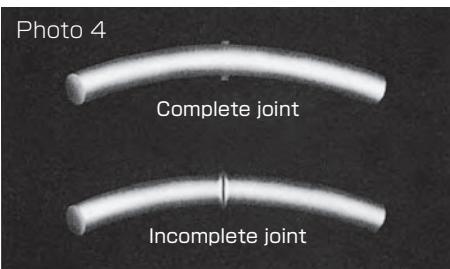

Cutting

- ① Calculate or measure the length needed for installation.
- ② The cut should be about 5% less (3% to 7% is acceptable) than the measurement needed. Make a straight cut at a right angle to the belt.
Example: If the required length is 1m, the cut should be at 950mm.
Note: The belt will slip if it is too long, and belt life will be reduced if it is too short.

Bancord Joints

- ① Lightly and uniformly melt both ends through contact with a heating plate (Photo1). Standard melting times are shown below (heating plate temperature: 240°C±10°C).

Type	Diameter (mm)		
	1.5~5	6~10	11~15
#480	20 seconds	50 seconds	70 seconds
#485N	60 seconds	80 seconds	—
#485RB	60 seconds	80 seconds	—
#489	40 seconds	60 seconds	90 seconds

※ Use 90 seconds for long V Belts (M, A, B Types).

- ② Quickly and evenly press the two melted ends together (Photo 2).
- ③ Hold the two ends together for a minute or two, and allow to cool and solidify (Photos 2 and 3).
- ④ Use scissors, nail clippers or a grinder to cut away any protrusions from the joint.

※ A transparent layer (Photo 4) may be visible if the joint is incomplete (particularly with #489).

Bancord Adhesion Machine

Bando offers a Bancord Adhesion Machine (DX-81), with a standard setting temperature of 240°C±10°C.

※ Width:130mm / Depth:210mm / Height:130mm / Power:AC100V

- Wear protective gloves to prevent burns during the joining procedure.
- Do not use candles or lighters to make joins.

Operating conditions

Classification	Item	
Round Belts	Belt tension rate	3~7% (typically 5%)
	Pulleys	Bancord Round Belt Pulleys
	Small pulley contact angle	180°
	Belt speed	#480·485N·485RB:2~12m/s #489:2~20m/s
	Operating temperature	0~50°C
V Belts	Belt tension rate	3~7% (typically 5%)
	Pulleys	Bancord V Belt Pulleys
	Small pulley contact angle	180°
	Belt speed	2~12m/s
	Operating temperature	0~50°C


Storage and transportation notes

- Belts and pulleys may be heavy. Use suitable equipment for transport and handling.
- Do not unreasonably bend belts, and do not transport or store with heavy objects on top of belts, as these may cause belt damage or premature belt failure.
- Store at low humidity at temperatures from 10°C~40°C, without exposure to direct sunlight.

Material weight per belt meter


Material weight per belt meter is found by multiplying the weight of each package carried by the number of packages carried, divided by the length of the conveyor.

Example: If the conveyor is 3m long, and carries four packages each weighing 3kg, material weight per belt meter is 4kg/m ($3\text{kg} \times 4 \text{ packages} \div 3 \text{ m}$).

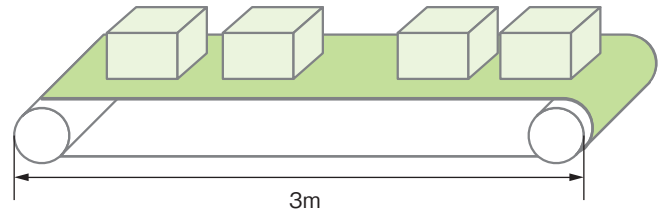

Conveyor length

Conveyor length is the distance from end to end, which differs from actual belt length.

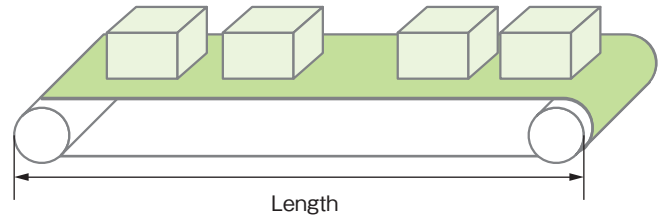

Cleats

Positioning cleats may be installed on the belt surface to prevent drops or for use in inclined conveyance.

Refer to page 35

Seamless Belts

Seamless Belts have no joints. They have little variation in thickness and weight, and superior bending resistance and small pulley matching. Attention to cost, delivery and manufacturing lot are necessary as belt production begins after receipt of order.

Refer to page 29 for Super SUNLINE and to page 51 for PS Belts

Joints

Joints are the places on the belt where it is joined. There are advantages and disadvantages to SUNLINE Belt joining methods, which affect belt life.


Refer to page 33

Anti-static

Static electricity is generated from friction when the belt contacts the supporting part during operation. The materials in the belt reduce static to prevent sparks and static clinging of electronic components, paper and fibers.


Table support

A support method is used under the belt's back-side surface. The support is made of iron plate, stainless steel, plywood or the like.

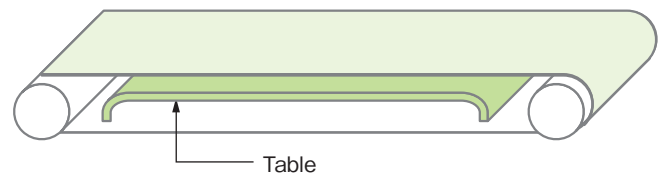


Trough conveyance

Trough-shaped conveyance is a method to prevent spillage of powders or granular loads.

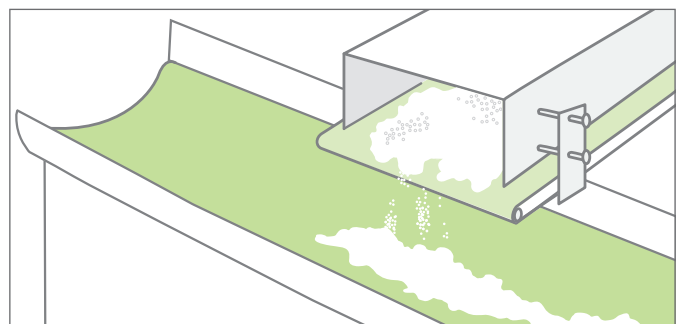

Knife edge

Knife edges are used in place of pulleys so that items do not fall off the conveyor when the belt comes into contact with a pulley or when items have high adhesion to the belt. Rounded iron rods or sheets are typically used, generally with a radius of 2mm to 5mm. (Radius (R) is shown in mm.)

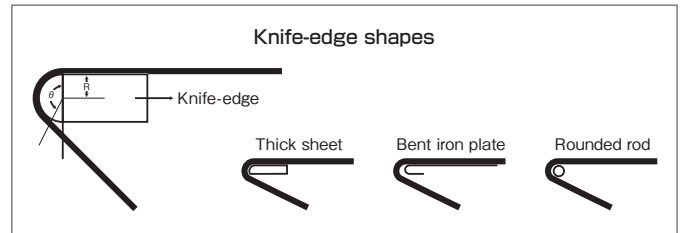

Refer to page 37

V-Guides

V-guides are cleats added to the belt backside to prevent snaking or bias, or cleats added to the belt surface to prevent drops or spills.


Plies

Plies refers to the number of canvas layers containing tensile members.



Crown pulley

Crown pulleys have higher central portions and are narrower at the sides. They prevent snaking or bias when tension is higher in the central portion of the belt.

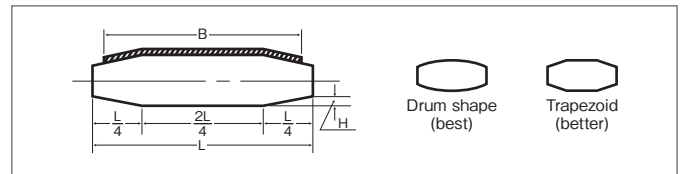

H(mm)	B(mm)										
	100 or less	300 or less	600 or less	1000 or less	1200 or less	1400 or less	1600 or less	1800 or less	2000 or less	2200 or less	2500 or less
1 ply	0.2	0.3	0.4	0.5	0.6	—	—	—	—	—	—
2-3 plies	0.5	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4

- ※ Use crown pulleys for the drive, head and tail pulleys.
- ※ If using crown pulleys when the belt circumference is 5m or less, the circumference at the edge of the belt should be within 0.5% of the circumference at the center of the belt.
- ※ Use crown pulleys on each belt when using multiple belts.
- ※ Crown pulleys should reach the entire belt width R (drum type).
- ※ Using crowns with 1-ply belts causes wrinkles and undulations in the belt.
- ※ Please consult with Bando for widths over 2500mm.


Belt cleats

Pieces added to the top of the belt through a fusing process. Rigidity is obtained through a fusion with the canvas inside the belt. Many heights and shapes are possible. Bonding problems are likely to occur if a different resin from the belt body is used.

Refer to page 36


Rollers

Method of support on the belt backside.

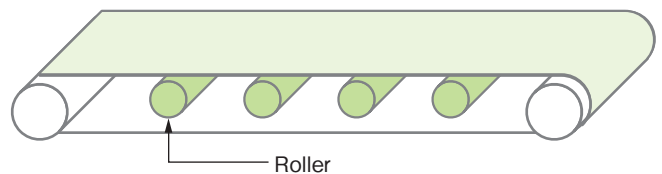

Belt edges

Both sides in the direction of width.

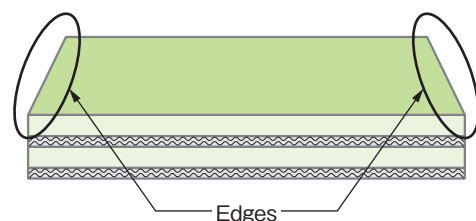



BANDO CHEMICAL INDUSTRIES, LTD.

<http://www.bando.co.jp>

2014.10

Industrial Products Division
Belt Business Administrative Headquarters

6-6, Minatojima Minamimachi 4-chome
Chuo-ku, Kobe, 650-0047
Japan

Tel : +81-78-304-2017
Fax : +81-78-304-2018

■ For further information contact below

※The contents of this catalog are subject to change without notice.
※It is prohibited to reproduce this catalog, in whole or in part, without
the express written permission of Bando Chemical Industries, Ltd.